
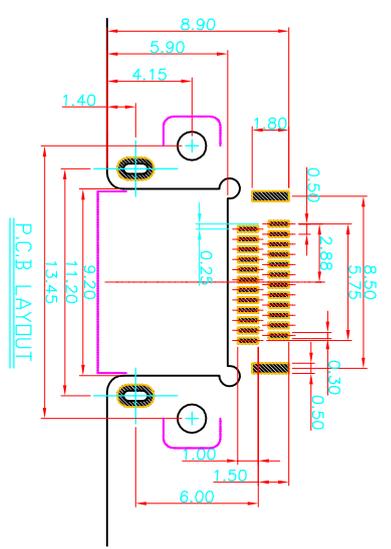
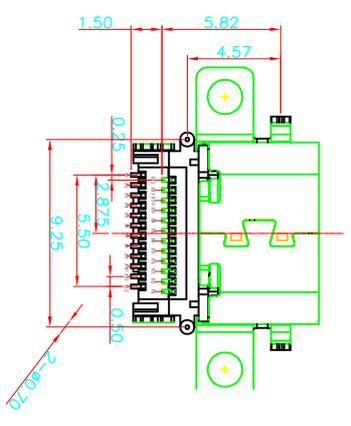
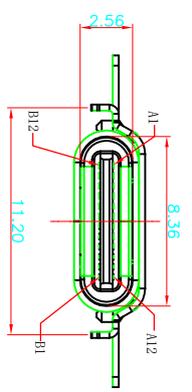

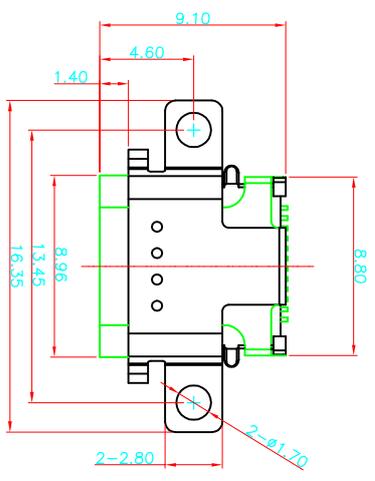


ROHS 客户图

目錄 MAPX	變更內容 MODIFICATION	日期 DATE
A0	NEW	09-10-20



A1	GND	B12	GND
A2	SSTXP1	B11	SSRX1
A3	SSTXM1	B10	SSRX1
A4	VBUS	B9	VBUS
A5	CCI	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10	SSRM2	B3	SSTXM2
A11	SSRX2	B2	SSTXP2
A12	GND	B1	GND

- Specification:
1. Current Rating: 10 AMP
 2. Voltage Rating: 30V AC/DC
 3. Dielectric Strength: 500V AC RMS for 1 minute.
 4. Contact Resistance: 30 mΩ Max.
 5. Insulator Resistance: 500M Ω/Min. AT 250V DC
 6. Mating/Unmating cycles: 2000cycles
 7. Temperature: -20°C to +60°C

产品图 深圳市鑫风雷电子有限公司

公差一览表		单位	MM	制图	王冠	产品料号	XFLC003-UCAF001-X
TOLERANCE UNLESS OTHERWISE		UNITS		DRAWING		PRODUCT PART NO.	
X ±0.30	X'	±5°	1:1	审核	雷永健	产品名称	X500 L1 3.15V板母座带点焊带螺丝孔
X ±0.25	X''	±2°		核准	雷永健	PRODUCT NO.	
X ±0.30	XX'	±1°	日期	APPD		角法	版本
XXX ±0.15	XXX'	±0.5°	2009/10/20			VIEW	A0