
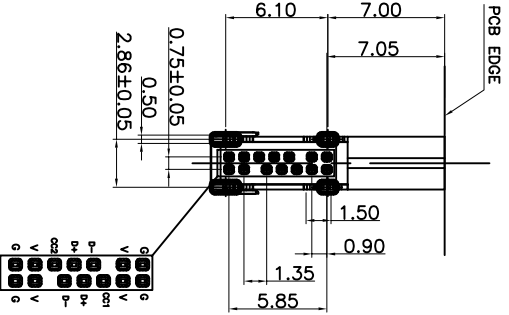


ROHS 客户图

目錄 MAPX A0	變更內容 MODIFICATION NEW	日期 DATE 09-10-20
------------------	-----------------------------	------------------------

PCB板厚建议1.0~1.2MM

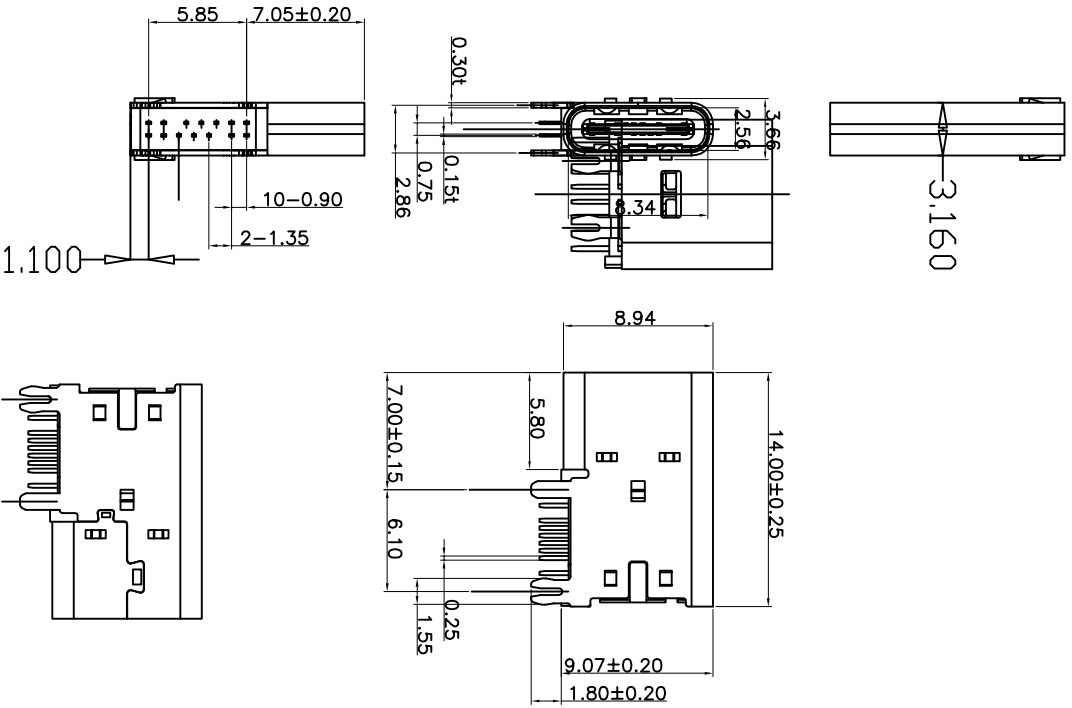

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

- SPECIFICATIONS:
- MECHANICAL :
 - 1.1 INSERTION FORCE : 8N~20N
 - 1.2 WITHDRAWAL FORCE : 8N~20N
AFTER 10,000 CYCLES MATING: 2N MIN.
 - ELECTRICAL :
 - 2.1 CONTACT CURRENT RATING: 3A .
 - 2.2 VOLTAGE RATING : 30V AC (rms)
 - 2.3 WITHSTANDING VOLTAGE: 100 VAC FOR 1 MINUTE.
INSULATION RESISTANCE: 100 MEGAOHMS MIN.
 - 2.4 CONTACT RESISTANCE: 40 MILLIOHMS MAX.
 - ENVIRONMENTAL :
 - 3.1 OPERATING TEMPERATURE: -25° C TO +85° C

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B7	DN2
A6	DP1	B6	DP2
A7	DN1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

7					
6					
5					
4	TYPE C MD	HIGH TEMP	BLACK	UL 94V-0	
3	CENTER PIECE	STAINLESS STEEL	—	NO Plated	
2	TYPE C TERMINAL	COPPER ALLOY	—	Gold Plated	
1	SHELL	STAINLESS STEEL	—	Ni Plated	
NO.	DESCRIPTION	MATERIAL	COLOR	REMARK	

深圳市鑫风雷电子有限公司

产品图 PRODUCT CHART DWG		单位 UNITS MM		制图 DRAWING 王冠		产品料号 PRODUCT PART NO. XFLJ008-UCAF001-X	
公差一览表 TOLERANCE UNLESS OTHERWISE		比例 SCALE 1:1		审核 CHKD 雷永健		产品名称 TYPE C母座侧插14P针长1.3	
X	±0.30	X'	±5°	日期 DATE 2009/10/20		角法 VIEW ⊕	
.X	±0.25	.X'	±2°	核准 APPD 雷永健		版本 VER A0	
.XX	±0.30	.XX'	±1°				
.XXX	±0.15	.XXX'	±0.5°				