
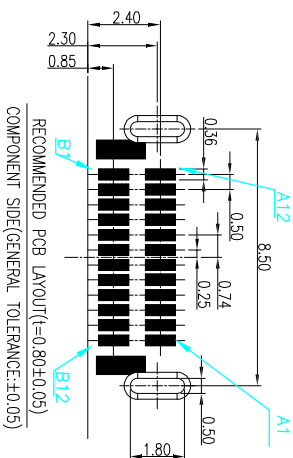

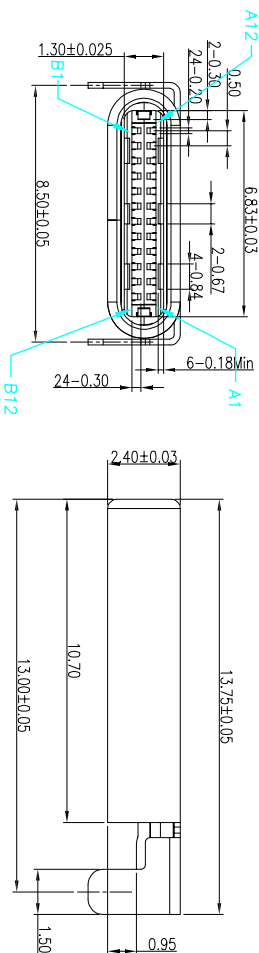
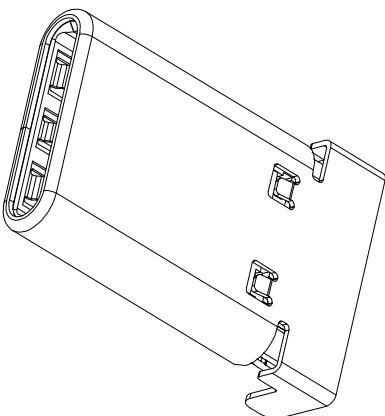


1 2 3 4 5 6 7 8 9 10

# Rohs 客户图

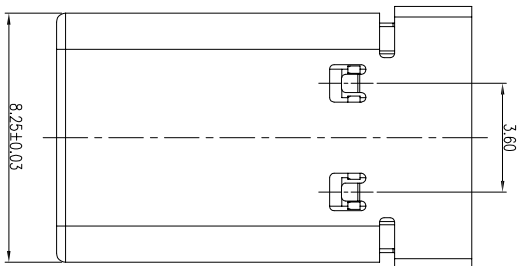

RECOMMENDED PCB LAYOUT(±0.80±0.05)  
COMPONENT SIDE(GENERAL TOLERANCE:±0.05)

|     |             |     |             |
|-----|-------------|-----|-------------|
| A1  | GND         | B12 | GND         |
| A2  | SSTXP1      | B11 | SSRXP1      |
| A3  | SSTXN1      | B10 | SSRXN1      |
| A4  | VBUS        | B9  | VBUS        |
| A5  | CC1         | B8  | SBU2        |
| A6  | DP1         | B7  | DN2         |
| A7  | DN1         | B6  | DP2         |
| A8  | SBU1        | B5  | CC2         |
| A9  | VBUS        | B4  | VBUS        |
| A10 | SSRXN2      | B3  | SSTXN2      |
| A11 | SSRXP2      | B2  | SSTXP2      |
| A12 | GND         | B1  | GND         |
| PIN | SIGNAL NAME | PIN | SIGNAL NAME |

| MAPX | MODIFICATION | DATE     |
|------|--------------|----------|
| A0   | NEW          | 09-10-20 |

SPECIFICATION  
MATERIAL  
See drawing  
STANDARD DATA  
Rating current:3.0 A  
ELECTRICAL

Insulator resistance: 100Mohms Min.  
Withstanding voltage: 100 VAC / minute  
Contact resistance: 40mohms Max.

MECHANICAL  
Mating force: 5~20N Max.  
Umating force : 6~20N Min.  
Durability: 10,000 cycles Min.

## 产品图

## 深圳市鑫风雷电子有限公司

| PRODUCT CHART DWG          |       |       |       |                  |                   |             |                        |
|----------------------------|-------|-------|-------|------------------|-------------------|-------------|------------------------|
| 公差一览表                      |       |       |       | 单位               | MM                | 制图          | 王冠                     |
| TOLERANCE UNLESS OTHERWISE |       |       |       | UNITS            |                   | DRAWING     |                        |
| X                          | ±0.30 | X'    | ±5°   | 比例               | 1:1               | 审核          | 雷永健                    |
| SCALE                      |       |       |       | 日期               | 2009/10/20        | 核准          | 雷永健                    |
| .XX                        | ±0.30 | .XX'  | ±1°   | DATE             |                   | APPD        |                        |
| .XXX                       | ±0.15 | .XXX' | ±0.5° |                  |                   |             |                        |
|                            |       |       |       | 产品料号             | XFLM001-UCAM001-X | 产品名称        | TYPE C公头铜合式沉板0.96双排SMT |
|                            |       |       |       | PRODUCT PART NO. |                   | PRODUCT NO. |                        |
|                            |       |       |       | 角法               | ⊕                 | 版本          | A0                     |
|                            |       |       |       | VIEW             |                   | VER         |                        |