

RoHS

客户图

目錄
MAPX



A0

设变内容
MODIFICATION

NEW

日期
DATE

09-10-20

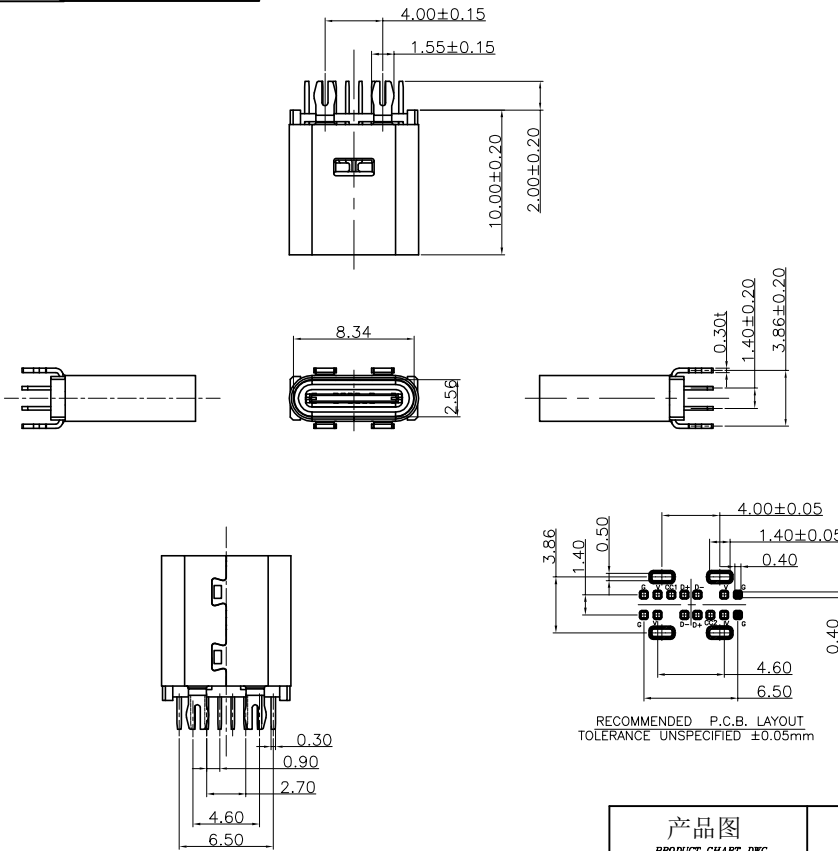

SPECIFICATION:

- CURRENT RATING: 5.0A MAX
- Withstanding Voltage: 100V AC
- TEMPERATURE RANGE: -30 °C ~ 85 °C
- CONTACT RESISTANCE: 40 MILLIONHM MAX
- INSULATION RESISTANCE: 100 MEGOHMS
- UNMATING FORCE : 5N~20N
- UNMATING FORCE : 6N~20N (1~1000次)
6N~20N (10000次之后)
- DURABILITY: 10,000 CYCLES

7				
6				
5				
4	TYPE C MD	HIGH TEMP	BLACK	UL 94V-0
3	CENTER PIECE	STAINLESS STEEL	---	NO Plated
2	TYPE C TERMINAL	COPPER ALLOY	---	Gold Plated
1	SHELL	STAINLESS STEEL	---	Ni Plated
NO.	DESCRIPTION	MATERIAL	COLOR	REMARK

产品图 PRODUCT CHART DWG		深圳市鑫风雷电子有限公司					
公差一览表 TOLERANCE UNLESS OTHERWISE		单位 UNITS	MM	制图 DRAWING	王冠	产品料号 PRODUCT PART NO.	XFLM002-UCAF003-X
.X	±0.30	.X'	±5'	比例 SCALE	1:1	审核 CHKD	雷永健
.XX	±0.25	.XX'	±2'	日期 DATE	2009/10/20	核准 APPD	雷永健
.XXX	±0.30	.XXX'	±1'	角法 VIEW		版本 VER	A0
.XXX	±0.15	.XXX'	±0.5'				

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO XINFENGLEI ELECTRONIC CO.,LTD.AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

由 Autodesk 教育版产品制作

G