
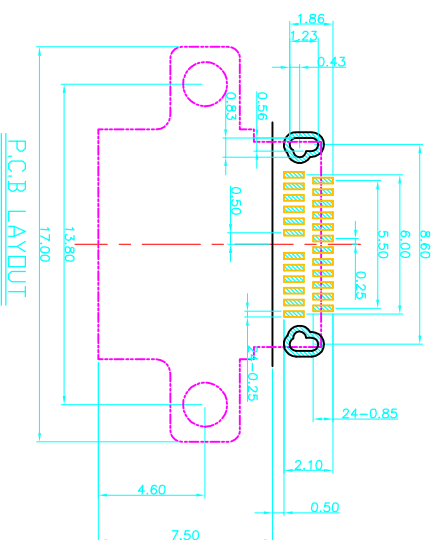
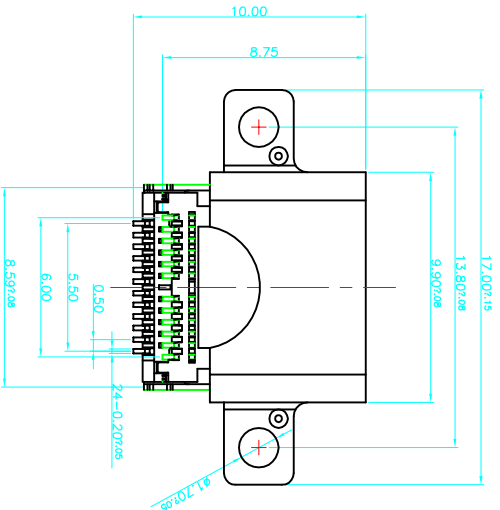
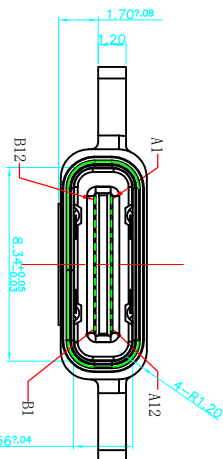
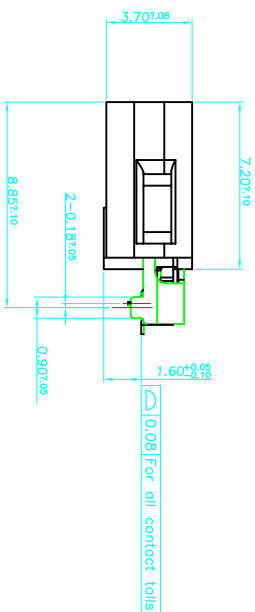
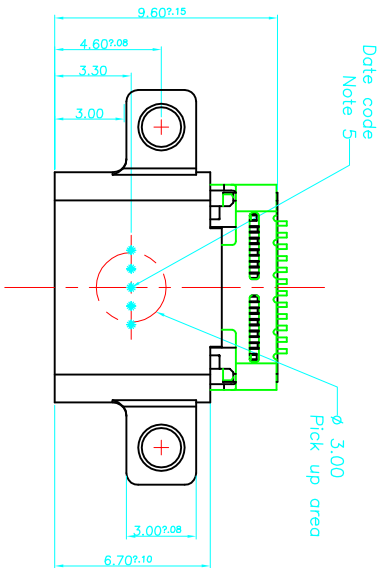


Rohs 客户图



- Notes:
1. Dimension shall be interpreted per ASME Y14.5M1994.
 2. Dimension marked with a triangle and a diamond should be checked by Q.C. and process, engineers and a triangle should also check the CPK data.

- Specification:
1. Current Rating: 10 AMP
 2. Voltage Rating: 30V AC/DC
 3. Dielectric Strength: 500V AC RMS for 1 minute.
 4. Contact Resistance: 30 mΩ Max.
 5. Insulator Resistance: 500M Ω Min. AT 250V DC.
 6. Mating/Umating cycles: 2000cycles
 7. Temperature: -20°C to +60°C

A1	GND	B12	GND
A2	SSTXP1	B11	SSRXP1
A3	SSTXN1	B10	SSRXN1
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10	SSRXN2	B3	SSTXN2
A11	SSRXP2	B2	SSTXP2
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

产品图

深圳市鑫风雷电子有限公司

公差一览表				单位	制图	王冠	产品料号	XFLX002-UCAF002-X
TOLERANCE UNLESS OTHERWISE				UNITS	DRAWING	审核	产品名称	TYPE C母座防水沉板1.6带螺丝孔
X	±0.30	X'	±5°	MM	1:1	雷永健	SCALE	
X	±0.25	X'	±2°			雷永健	PRODUCT NO.	
XX	±0.30	XX'	±1°			雷永健	角法	
XXX	±0.15	XXX'	±0.5°	DATE	2009/10/20	APPD	版本	AO