
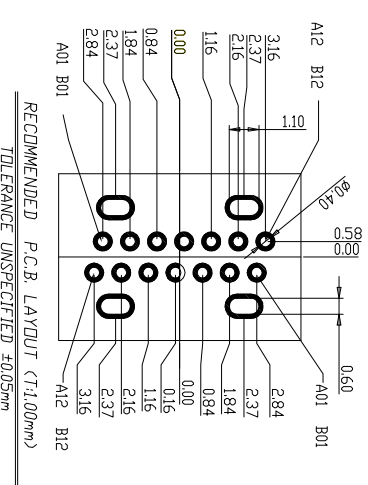
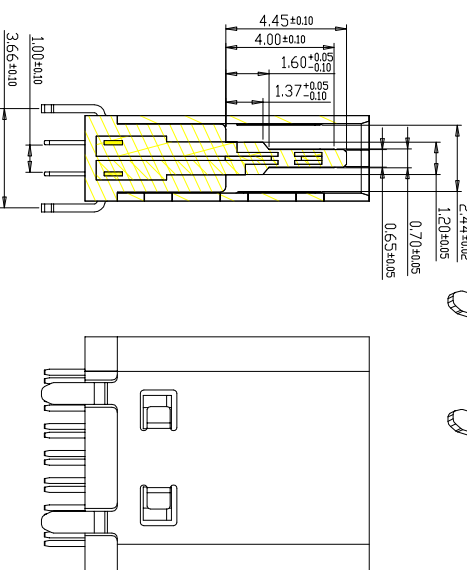
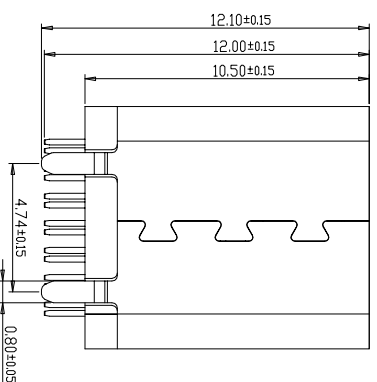


目録 MAPX	設定内容 MODIFICATION	日期 DATE
AO	NEW	09-10-20

SPECIFICATIONS:

1. ELECTRICAL CHARACTERISTICS
 - 1-1. CONTACT RESISTANCE: 30mΩ MAX.
 - 1-2. DIELECTRIC WITHSTANDING VOLTAGE: 100V AC FOR ONE MINUTE.
 - 1-3. INSULATION RESISTANCE: 1000MΩ MIN. MEASURED BY 500 VDC
2. MECHANICAL CHARACTERISTICS:
 - 2-1. INSERTION FORCE :0.5~2.0kgf(REF.)
 - 2-2. WITHDRAWAL FORCE :0.8~2.0kgf(REF.)
3. LIFE TEST: 10,000 CYCLES.
4. TO CONFORM TO THE KC6090 HAZARDOUS SUBSTANCE FREE SPEC.

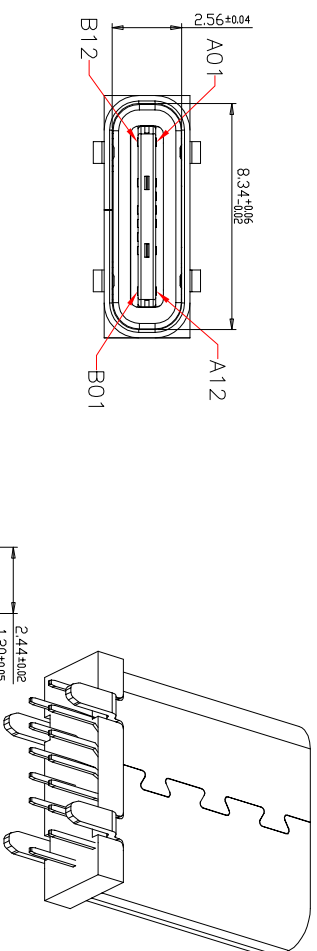

RECOMMENDED P.C.B. LAYOUT (T:1.00mm)
TOLERANCE UNSPECIFIED $\pm 0.05\text{mm}$

1-1 截面

Fig. 1

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1		
A6	DP1	B7	DM2
A7	DM1	B6	DP2
		B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

产品图		深圳市鑫风雷电子有限公司					
PRODUCT CHART DWG							
公差一览表		单位	MM	制图	王冠	产品料号	XFLJ012-UCAFO03-A
TOLERANCE UNLESS OTHERWISE		比例	1:1	审核	雷永健	产品名称	TYPE C 14P母座180度 H=10.1
X.	±0.30	X.	±5°	CKD		PRODUCT NO.	
.X.	±0.25	.X°	±2°				
.XX	±0.30	.XX°	±1°	核准	雷永健	画法	版本
.XXX	±0.15	.XXX°	±0.5°	APPD		VIEW	40
日期		2009/10/20					
DATE							