


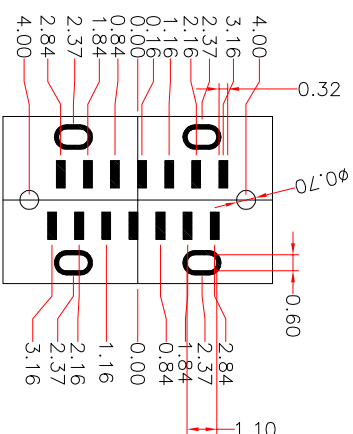
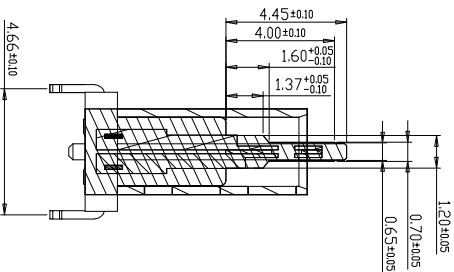


目 録 MAPX	設 変 内 容 MODIFICATION	日 期 DATE
A0	NEW	09-10-20

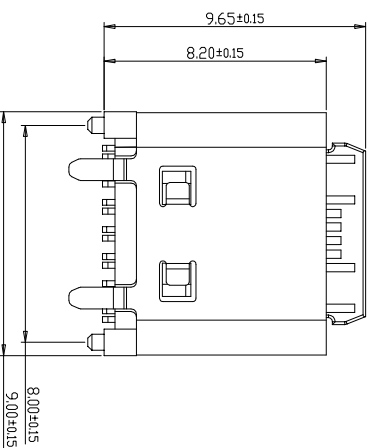

SPECIFICATIONS:

1. ELECTRICAL CHARACTERISTICS:
 - 1-1. CONTACT RESISTANCE: $\leq 30\text{m}\Omega$ MAX.
 - 1-2. DIELECTRIC WITHSTANDING VOLTAGE: 100V AC FOR ONE MINUTE.
 - 1-3. INSULATION RESISTANCE: 100M Ω MIN. MEASURED BY 500 VDC
2. MECHANICAL CHARACTERISTICS:
 - 2-1. INSERTION FORCE: $0.5\text{--}2.0\text{N}(\text{G} \times \text{G} \times \text{G})$
 - 2-2. WITHDRAWAL FORCE: $0.8\text{--}2.0\text{N}(\text{G} \times \text{G} \times \text{G})$
3. LIFE TEST: 10,000 CYCLES.
4. TO CONFIRM TO THE RECOMM HAZARDOUS SUBSTANCE FREE SPEC.

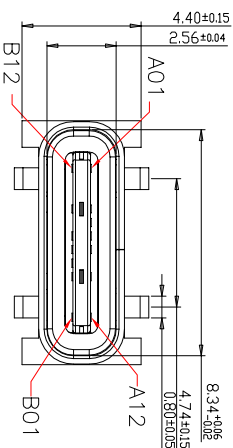

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1		
A6	DP1	B7	DN2
A7	DN1	B6	DP2
		B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

6	SHELL	STAINLESS STEEL	NI Plated	1PCS
5	SHIELDING PLATE	STAINLESS STEEL	---	1PCS
4	MD	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
3	CONTACT	COPPER ALLOY	Au/NI Plated	1SET
2	CONTACT	COPPER ALLOY	Au/NI Plated	1SET
1	HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

PRODUCT CHART

深圳市鑫风雷电子有限公司

公差一览表				单位	MM	制图	王冠	产品料号	XLJ012-UCAP004-A
TOLERANCE UNLESS OTHERWISE				UNITS		DRAWING		PRODUCT PART NO.	
.X	±0.30	.X	±5°	比例 SCALE	1:1	审核	雷永健	产品名称	TYPE C 14P母座 180度SMT H=8.
.X	±0.25	.X	±2°			CHKD		PRODUCT NO.	
.XX	±0.30	.XX	±1°			核准	雷永健	角法	
.XXX	±0.15	.XXX	±0.5°			DATE	2009/10/20	核准 APPD	
								VIEW	 