
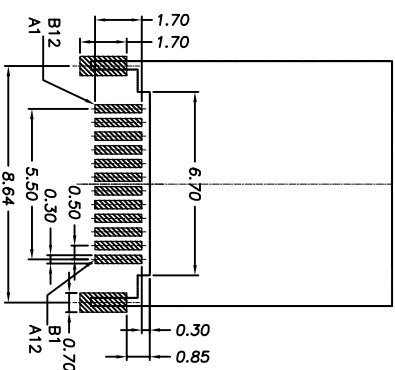
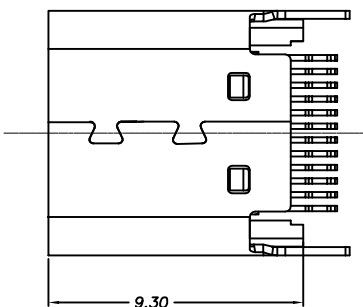






1 2 3 4 5 6 7 8 9 10

Rohs 客户图

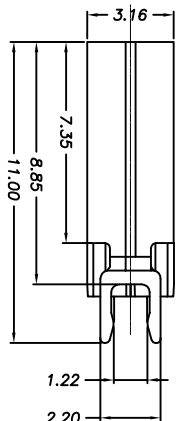

RECOMMENDED P.C.B. LAYOUT (T:1.20mm)
TOLERANCE UNSPECIFIED ±0.05mm

A1	GND	B12	GND
A2	SSTXP1	B11	SSRXP1
A3	SSTXN1	B10	SSRXN1
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10	SSRXN2	B3	SSTXN2
A11	SSRXP2	B2	SSTXP2
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

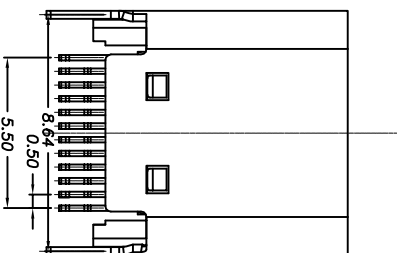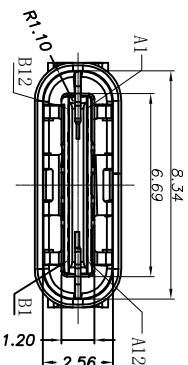

NOTE:

- 1.MATERIAL SPECIFICATION:
 - 1.HOUSING:HIGH TEMPERATURE RESISTANT PLASTIC,U194 V-0.
 - 2.CONTACTS:COOPER ALLOY
 - 3.MID PLATE: STAINLESS STEEL
 - 4.FRONT SHELL: STAINLESS STEEL
- 2.PLATING SPECIFICATION:
 - 2-1.CONTACTS:
Ni 50u" MIN. UNDER PLATED OVER ALL.
Au PLATED ON THE FUNCTIONAL AREA OF CONTACT.
(GOLD PLATING THICKNESS FOLLOW THE P/N)
 - 2-2.FRONT SHELL:
Ni 30u" MIN. UNDER PLATED OVER ALL.

- 2-3.MID PLATE:
CLEAR ONLY
- 3.MECHANICAL PERFORMANCE.
 - 3-1.INSERTION FORCE: 0.5~2.0kgf.
 - 3-2.REMOVAL FORCE: 0.8kgf~2.0kgf.
 - 3-3.DURABILITY: 10000 CYCLES.
- 4.ELECTRICAL PERFORMANCE:
 - 4-1. CURRENT RATING:5.0A
VOLTAGE RATING:5.0V
 - 4-2. LCCR:
VBUS & GND PINS AND OTHER PINS: 40mΩ/PIN MAX.
SHIELD: 50mΩ/MAX.
LCCR MAX. CHANGE OF ALL PINS: 10mΩ.

- 4-3.INSULATION RESISTANCE: 100MΩ MIN
- 4-4.DIELECTRIC WITHSTAND VOLTAGE:AC 100V FOR 1 MINUTE.
5. ENVIRONMENTAL PERFORMANCE:
 - OPERATING TEMPERATURE: -25~+85
 - 6.IR REFLOW:
THE PEAK TEMPERATURE ON THE BOARD SHALL BE MAINTAINED FOR 10 SECONDS AT 260°C.

产品图

PRODUCT CHART DWG

深圳市鑫风雷电子有限公司

公差一览表				单位				制图				产品料号			
TOLERANCE UNLESS OTHERWISE				UNITS				DRAWING				PRODUCT PART NO.			
X	±0.30	X'	±5°	比例	1:1	审核	雷永健	产品名称	TYPE C母座24P母座夹板1.2 L=9.3	PRODUCT NO.	角法	版本			
.XX	±0.25	.X'	±2	日期	2009/10/20	核准	雷永健	角法	☉	☐	☐	☐	☐	☐	☐
.XXX	±0.15	.XXX'	±1°	DATE		APPD		VIEW							