

1

RoHS

2

客户图

3

4

5

6

7

8


9

10

REV.	ECN NO.	LOCATIONS	DESCRIPTION	DATE	DESIGN
A3	ECN20160120003	(A3)	修改XFLY003-UCAF004-1的脚位尺寸	2016.01.20	王冠
B1	ECN20160811002	(B1)	整理图面，料号更新	2016.08.11	雷永健

USB TYPE-C FULL-FEATURED RECEPTACLE INTERFACE PIN ASSIGNMENTS

PIN	Signal Name	Description	PIN	Signal Name	Description
A1	GND	Ground return	B12	GND	Ground return
A2	SSTXp1	Positive half of first SuperSpeed TX differential pair	B11	SSRXp1	Positive half of first SuperSpeed RX differential pair
A3	SSTXn1	Negative half of first SuperSpeed TX differential pair	B10	SSRXn1	Negative half of first SuperSpeed RX differential pair
A4	Vbus	Bus Power	B9	Vbus	Bus Power
A5	CC1	Configuration Channel	B8	SBU2	Sideband Use (SBU)
A6	Dp1	Positive half of the USB 2.0 differential pair-Position 1	B7	Dn2	Negative half of the USB 2.0 differential pair-Position 2
A7	Dn1	Negative half of the USB 2.0 differential pair-Position 1	B6	Dp2	Positive half of the USB 2.0 differential pair-Position 2
A8	SBU1	Sideband Use (SBU)	B5	CC2	Configuration Channel
A9	Vbus	Bus Power	B4	Vbus	Bus Power
A10	SSRXn2	Negative half of second SuperSpeed RX differential pair	B3	SSTXn2	Negative half of second SuperSpeed TX differential pair
A11	SSRXp2	Positive half of second SuperSpeed RX differential pair	B2	SSTXp2	Positive half of second SuperSpeed TX differential pair
A12	GND	Ground return	B1	GND	Ground return

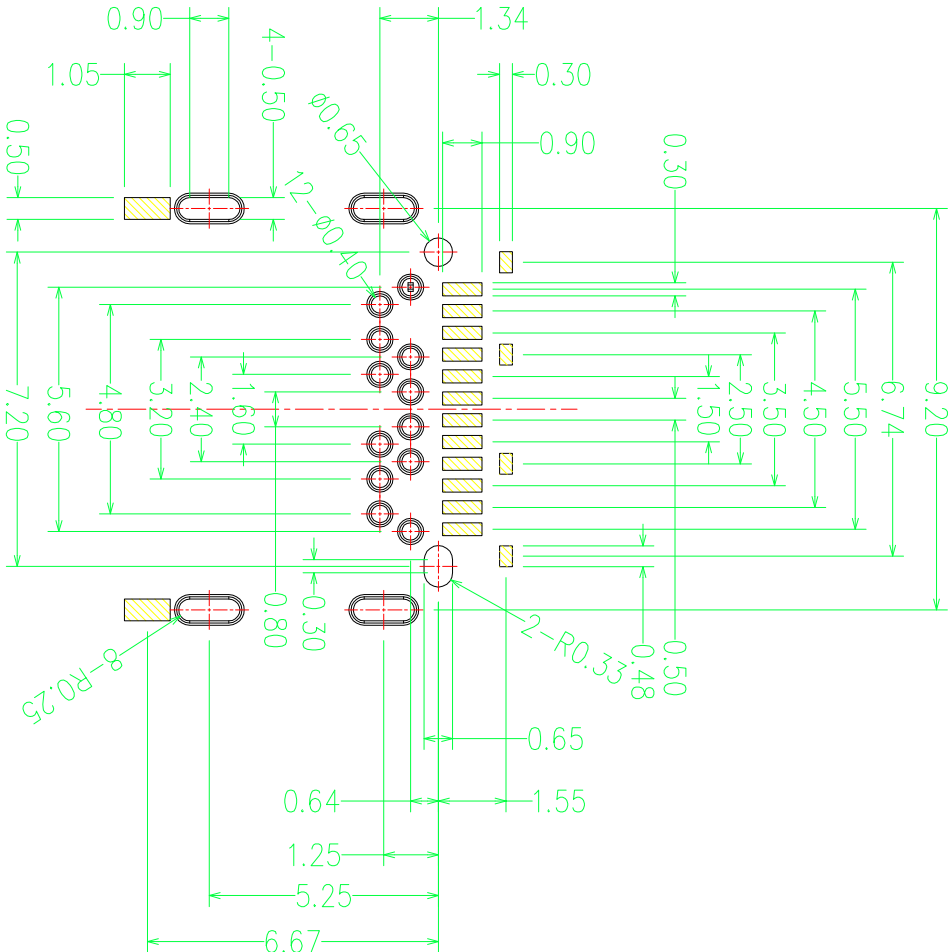

RECOMMENDED P.C.B LAYOUT (COMPONENT SIDE)

PCB THICKNESS: 2.0 ± 0.05mm

产品图

PRODUCT CHART DWG

深圳市鑫风雷电子有限公司

公差一览表				单位				制图				产品料号			
TOLERANCE UNLESS OTHERWISE				UNITS				DRAWING				PRODUCT PART NO.			
X	±0.30	X'	±5°	X	±0.30	X'	±5°	X	±0.30	X'	±5°	X	±0.30	X'	±5°
XX	±0.25	XX'	±2°	XX	±0.30	XX'	±2°	XX	±0.30	XX'	±2°	XX	±0.30	XX'	±2°
XXX	±0.15	XXX'	±0.5°	XXX	±0.15	XXX'	±0.5°	XXX	±0.15	XXX'	±0.5°	XXX	±0.15	XXX'	±0.5°