

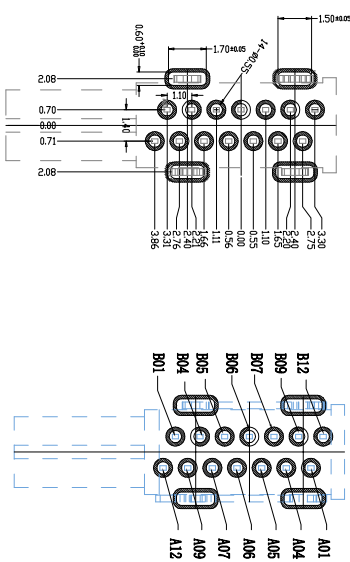

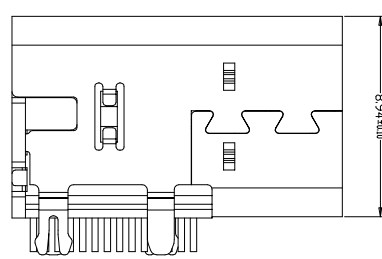

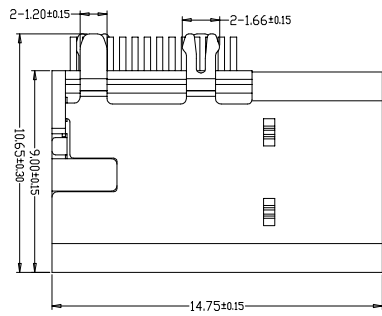


# RoHS 客户图

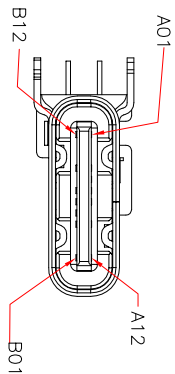

目錄 MAPX	變更內容 MODIFICATION	日期 DATE
A0	NEW	09-10-20

- 产品要求:
1. 壳子: a. 不锈钢201 T: 0.30mm  
b. 电镀镍
  2. 端子: a. (C1814)/铜 T: 0.20mm  
b. 电镀半金锡 (3d<sup>2</sup>)
  3. 卡勾: a. 不锈钢301 T: 0.30mm
  4. 塑胶: LCP (E1301)
  5. MECHANICAL:  
INSERTION: 5°-20N.  
EXTRACTION: 8°-20N.  
DURABILITY: 10000 CYCLES
  6. ELECTRICAL:  
CURRENT: 5A MIN FOR VBUS;  
0.25A MIN FOR OTHER.  
VOLTAGE: 5VAC MAX  
WITHSTANDING VOLTAGE: 100V AC.  
CONTACT RESISTANCE: 40mΩ MAX.  
INSULATION RESISTANCE: 100MΩ MIN.

NO.	DESCRIPTION	MATERIAL	REMARKS	QTY
4	外壳	不锈钢		
3	端子	高导电铜 (C1814)	镀镍 半金锡 (3d <sup>2</sup> )	IPCS TEST
2	塑胶主体	LCP (E1301)	黑色	TEST
1	卡勾	不锈钢		TEST

NO.	DESCRIPTION	MATERIAL	REMARKS	QTY
4	外壳	不锈钢		
3	端子	高导电铜 (C1814)	镀镍 半金锡 (3d <sup>2</sup> )	IPCS TEST
2	塑胶主体	LCP (E1301)	黑色	TEST
1	卡勾	不锈钢		TEST

## 产品图

公差一览表  
TOLERANCE UNLESS OTHERWISE SPECIFIED

X	±0.30	X'	±5°
XX	±0.25	X''	±2°
XXX	±0.15	XXX'	±0.5°

## 产品图

制图  
DRAWING

单位 UNITS	MM	制图 DRAWING	王冠	产品料号 PRODUCT PART NO.	XFLJ012-UCAF009-X
比例 SCALE	1:1	审核 CHKD	雷永健	产品名称 PRODUCT NO.	TYPE C 14P母座侧插普通款
日期 DATE	2009/10/20	核准 APPD	雷永健	角法 VIEW	
				版本 VER	A0