
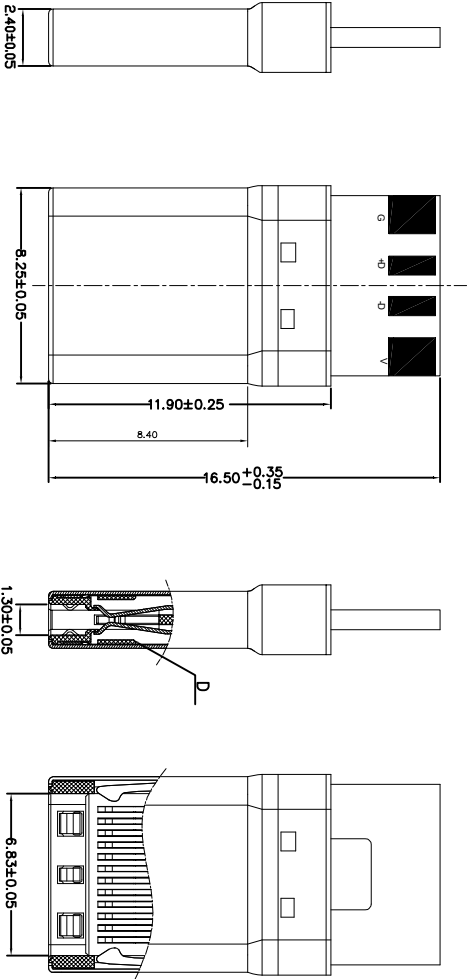


12345678910

1 2 3 4 5 6 7 8 9 10

Rohs 客户图

目錄 MAPX	變更內容 MODIFICATION	日期 DATE
A0	NEW	09-10-20



- NOTES
- 1.MATERIAL: See drawing
 - 2.STANDARD DATA
 - 2.1Rating current:5.0A for VBUS (i.e.,pins A4,A9,B4,B9);
1.25A for Vconn and GND (i.e.,pins B5,A1,A12,B1,B12);
0.25A for all the other contacts.
 - 3.ELECTRICAL
 - 3.1.insulator resistance: 100M ohms Min.
 - 3.2.Withstanding voltage: 100 VAC / minute
 - 3.3.Contact resistance: initial 40mohms Max.
after 50mohms Max.
 - 4.MECHANICAL
 - 4.1Mating force: 5~20N
 - 4.2Umating force : 8~20N
 - 4.3Durability: 10000 cycles Min.
 - 5.PACKING: 100pcs/tray (reference)

6	LATCH	STAINLESS	: Ni: 50u"
5	CONTACT	COPPER ALLOY	Contact area: 5u", Solder teils: Tin80u", Ni: 30~80u"
4	molding 2	L.C.P	(Black)
3	GNDSPRING	STAINLESS	
2	Molding	L.C.P	(Black)
1	SHELL	STAINLESS	Ni: 50u"

产品图 PRODUCT CHART DWG				深圳市鑫风雷电子有限公司			
公差一览表 TOLERANCE UNLESS OTHERWISE				单位 UNITS	制图 DRAWING	王冠	产品料号 PRODUCT PART NO.
X	±0.30	X'	±5°	比例 SCALE	审核 CHKD	雷永健	产品名称 PRODUCT NO.
.XX	±0.20	.XX'	±2°	日期 DATE	批准 APPD	雷永健	角法 VIEW
.XXX	±0.15	.XXX'	±0.5°	2009/10/20			版本 VER
							A0