
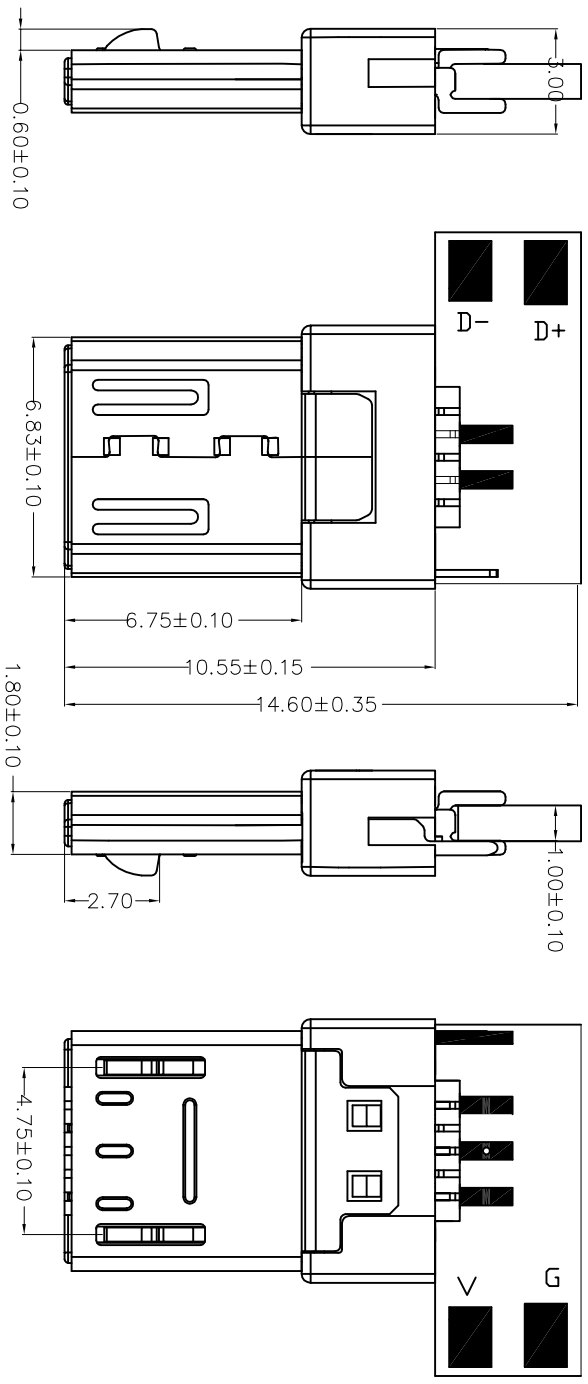


ROHS 客户图

目錄 MAPX 40	變更內容 MODIFICATION NEW	日期 DATE 09-10-20
------------------	-----------------------------	------------------------

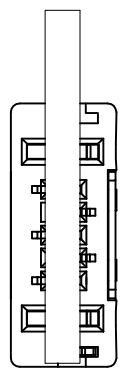

- 备注:
1. 材质:
 - 1.1 胶芯: LCP UL94 V-0
 - 1.2 端子PIN针: C2680 T=0.20mm
 - 1.3 外壳: SUS201 t=0.20mm
 2. 电性功能:
 - 2.1 额定电压: 5.0V DC Max.
 - 2.2 额定电流: 1、5PIN 1.8A , 2、3、4PIN 1A.
 - 2.3 耐压: 100 V(AC) 在1分钟.
 - 2.4 接触阻抗: 50 mΩ Max.
 - 2.5 绝缘测试: 100 MΩ Min.
 - 2.6 工作温度: -25° C~80° C
 3. 机械功能:
 - 3.1 插入力: 35N Max
 - 3.2 拔出力: 8~25N

深圳市鑫风雷电子有限公司

4	卡钩	Steel (T=0.40)			
3	Snell	SUS201 (T=0.20)			
2	Housing	LCP			
1	Terminal	C2680			
ITEM	DESC.	MATERIAL	REMARKS	PART	REMARKS

产品图 PRODUCT CHART DWG		公差一览表 TOLERANCE UNLESS OTHERWISE		单位 UNITS	MM	制图 DRAWING	王冠	产品料号 PRODUCT PART NO.	XFLY012-UMKM001-X
X	±0.30	X	±5°	比例 SCALE	1:1	审核 CHECK	雷永健	产品名称 PRODUCT NAME	MICRO 5P公头单脚双弹簧板式90度焊盘
X	±0.25	X	±2°	日期 DATE	2009/10/20	核准 APPD	雷永健	角法 VIEW	版本 VER
.XX	±0.20	.XX	±1°						40
.XXX	±0.15	.XXX	±0.5°						

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO XINFENGLI ELECTRONIC CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION