


ROHS

客户图

目錄 MAPX A0	變更內容 MODIFICATION NEW	日期 DATE 09-10-20
------------------	-----------------------------	------------------------

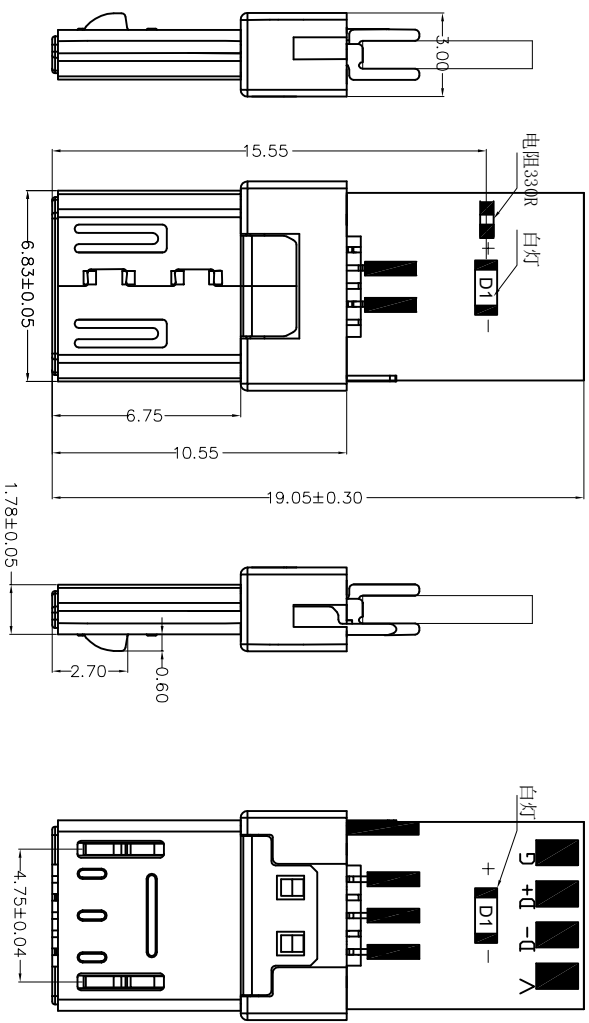

- Note:
- Material:
 - Housing: high temperature thermoplastic with UL94 V-0
 - Terminal: copper alloy, t=0.20mm
 - Shell :SUS t=0.20mm
 - Specification:
 - Current rating: 1.0 A Max.
 - Voltage rating: 30V AC(rms) Max.
 - Dielectric withstanding voltage: 100 V(AC) for 1 minute.
 - Contact resistance: 50 mΩ Max.
 - Insulation resistance: 100 MΩ Min.
 - Temperature range: -25° C~80° C
- 端子及卡钩高低PIN落差0.05mmMax
 PIN针插法: -4端子插1, 4;-5端子插2, 3, 5

产品图

深圳市鑫风雷电子有限公司

5	PCB	FR-4
4	卡钩	Steel (T=0.40)
3	Shell	SUS201 (T=0.20)
2	Housing	LCP
1	Terminal	C2680/C5191

公差一览表 TOLERANCE UNLESS OTHERWISE SPECIFIED		单位 UNITS	MM	制图 DRAWING	王冠	产品料号 PRODUCT PART NO.	XFLY012-UMKM002-X
X	±0.30	X'	±5'	审核 CHKD	雷永健	产品名称 PRODUCT NO.	MICRO 5P公头单脚双弹夹板式双面带灯带壳
.XX	±0.20	.XX'	±2'	核准 APPD	雷永健	角法 VIEW	ISO
.XXX	±0.15	.XXX'	±0.5'	日期 DATE	2009/10/20	版本 VER	A0