

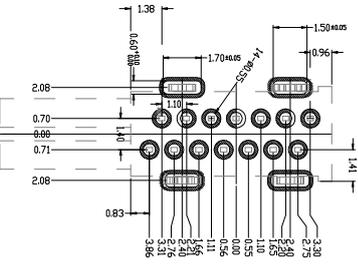

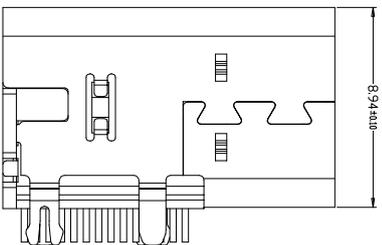
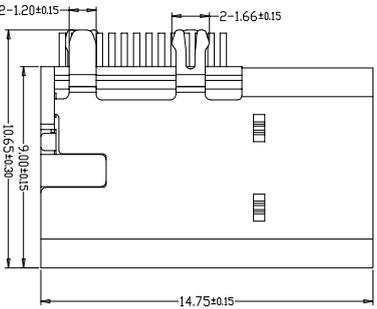


# RoHS 客户图

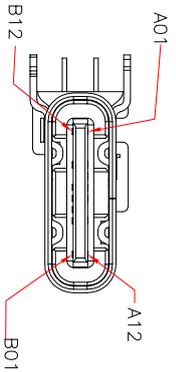

- 产品要求:
1. 壳子: a. 不锈钢201 T:0.30mm  
b. 电镀镍
  2. 端子: a. (C1814)/铜 T:0.20mm  
b. 电镀半金锡(3d<sup>2</sup>)
  3. 卡勾: a. 不锈钢301 T: 0.30mm
  4. 塑胶: LCP (E1301)
  5. MECHANICAL:  
INSERTION: 5°~20N.  
EXTRACTION: 8°~20N.  
DURABILITY: 10000 CYCLES
  6. ELECTRICAL:  
CURRENT: 5A MIN FOR VBUS;  
0.25A MIN FOR OTHER.  
VOLTAGE: 5VAC MAX  
WITHSTANDING VOLTAGE: 100V AC.  
CONTACT RESISTANCE: 40mΩ MAX.  
INSULATION RESISTANCE: 100MΩ MIN.

NO.	DESCRIPTION	MATERIAL	REMARKS	QTY
1	外壳	不锈钢		
2	端子	高导电铜 (C1814)		
3	塑胶主体	LCP (E1301)		
4	卡勾	不锈钢		

NO.	DESCRIPTION	MATERIAL	REMARKS	QTY
1	外壳	不锈钢		
2	端子	高导电铜 (C1814)		
3	塑胶主体	LCP (E1301)		
4	卡勾	不锈钢		

## 产品图

公差一览表  
TOLERANCE UNLESS OTHERWISE SPECIFIED

公差一览表	TOLERANCE UNLESS OTHERWISE SPECIFIED	单位	MM	制图	王冠	产品料号	01012-UCAR009-X
X	±0.30	X'	±5°	审核	雷永健	产品名称	TYPE C 14P母座侧插普通款
XX	±0.30	XX'	±2°	核准	雷永健	角法	TYPE C 14P母座侧插普通款
XXX	±0.15	XXX'	±1°	日期	2009/10/20	版本	A0