
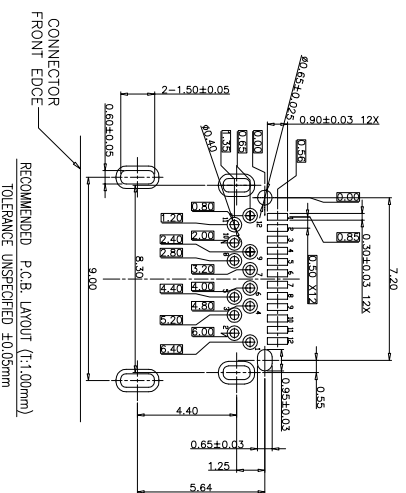

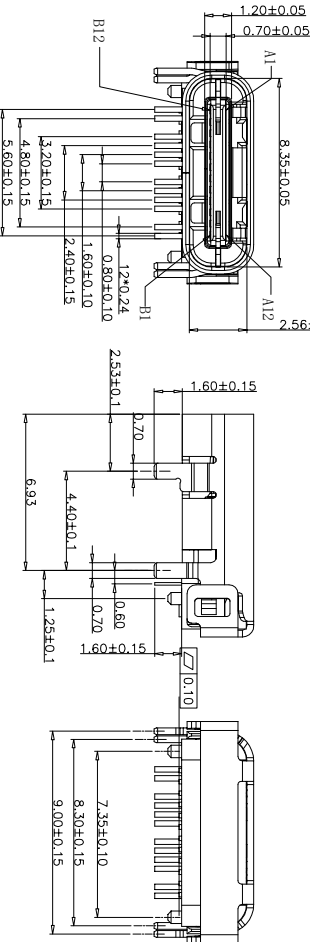


RoHS 客户图

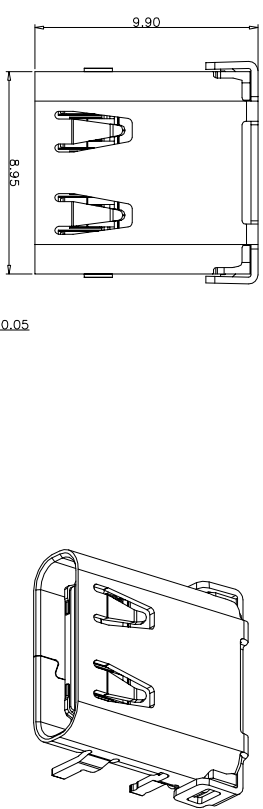

NOTES: 1. MATERIAL:

MOLDING: LCP UL94 V-0
CONTACT: C1814,
GOLD PLATED, 1U" Min ON CONTACT AREA,
100u" Min TIN ON SOLDER AREA,
50u" NICKEL PLATING OVER ALL.

SHELL: SUS304-H1=0.30±0.03mm
50u" NICKEL PLATING OVER ALL.

SHLD.SUS301-H1T=0.20±0.03mm

2. MECHANICAL:
INSERTION: 5~20N.
EXTRACTION: 8~20N AFTER TEST.
DURABILITY: 10000 CYCLES

3. ELECTRICAL:
CURRENT: 5A FOR VBUS;
1.25A FOR GND PIN;
0.25A FOR OTHER.

VOLTAGE: 20 V MAX
WITHSTANDING VOLTAGE: 100V AC R.M.S.
CONTACT RESISTANCE: 40mΩ MAX.

INSULATION RESISTANCE: 100MΩ MIN.
4. ENVIRONMENTAL
TEMPERATURE RANGE -25°C ~ +85°C

NO	DESCRIPTION	MATERIAL	REMARKS	QTY
1	半成品	LCP UL94V-0	BLACK	1PCS
2	端子	C1814, T=0.12	Au/Ni Plated	2SET
3	薄片	SUS 304, T=0.20	---	1PCS
4	薄片	SUS 316, T=0.10	---	1PCS
5	壳体	SUS 201, T=0.30	Ni Plated	1PCS

NO	DESCRIPTION	MATERIAL	REMARKS	QTY
1	半成品	LCP UL94V-0	BLACK	1PCS
2	端子	C1814, T=0.12	Au/Ni Plated	2SET
3	薄片	SUS 304, T=0.20	---	1PCS
4	薄片	SUS 316, T=0.10	---	1PCS
5	壳体	SUS 201, T=0.30	Ni Plated	1PCS

深圳市鑫风雷电子有限公司

公差一览表		单位		比例		日期		制图		产品料号	
TOLERANCE UNLESS OTHERWISE	UNIT	MM	UNITS	SCALE	DATE	DRAWING	DATE	CHKD	DATE	PRODUCT NO.	PRODUCT PART NO.
X	±0.30	X	±5°	1:1	2009/10/20	王冠	00302-UCAP005-B	雷永健	TYPE C母座24P板上前插后插单面式=9.87脚长1.6	00302-UCAP005-B	
XX	±0.25	X	±2°			雷永健					
XXX	±0.15	XXX	±0.5°			雷永健					