

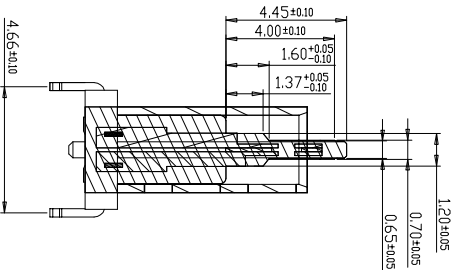
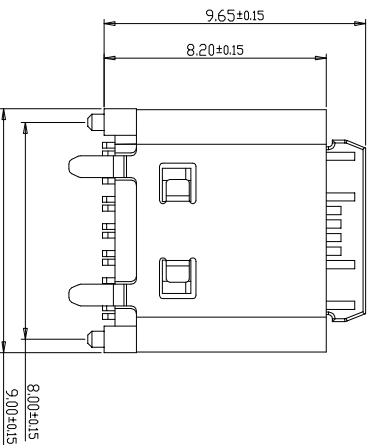



RoHS 客户图

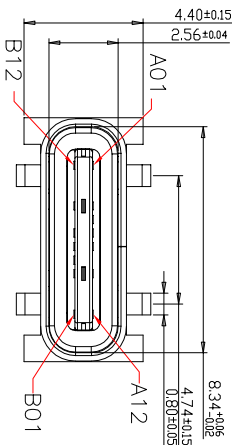

截面 1-1

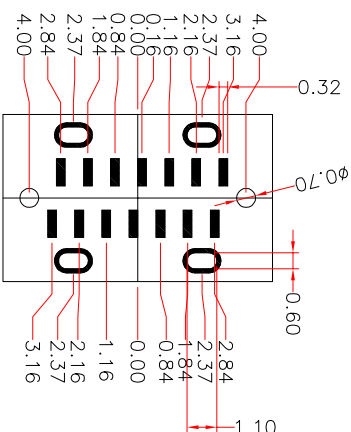

RECOMMENDED P.C.B. LAYOUT (T:1.00mm)
TOLERANCE UNSPECIFIED ±0.05mm



- SPECIFICATIONS:
- ELECTRICAL CHARACTERISTICS:
 - 1-1. CONTACT RESISTANCE: 30mΩ MAX.
 - 1-2. DIELECTRIC WITHSTANDING VOLTAGE: 100V AC FOR ONE MINUTE.
 - 1-3. INSULATION RESISTANCE: 100MΩ MIN. MEASURED BY 500 VDC.
 - MECHANICAL CHARACTERISTICS:
 - 2-1. INSERTION FORCE: 0.5-2.0kgf(REF.)
 - 2-2. WITHDRAWAL FORCE: 0.8-2.0kgf(REF.)
 - LIFE TEST: 10,000 CYCLES.
 - TO CONFORM TO THE KRCOMM HAZARDOUS SUBSTANCE FREE SPEC.

目錄 MAPX	變更內容 MODIFICATION	日期 DATE
A0	NEW	09-10-20

6	SHELL	STAINLESS STEEL	Ni Plated	1PCS
5	SHIELDING PLATE	STAINLESS STEEL	---	1PCS
4	MD	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
3	CONTACT	COPPER ALLOY	Au/Ni Plated	1SET
2	CONTACT	COPPER ALLOY	Au/Ni Plated	1SET
1	HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

深圳市鑫风雷电子有限公司

产品图

PRODUCT CHART DWG

公差一览表

TOLERANCE UNLESS OTHERWISE

公差	公差	公差	公差
X	±0.30	X'	±5°
.X	±0.25	.X'	±2°
.XX	±0.30	.XX'	±1°
.XXX	±0.15	.XXX'	±0.5°

单位 UNITS	制图 DRAWING	产品料号 PRODUCT PART NO.
MM	王冠	01012-UCAF004-A
比例 SCALE	审核 CHECK	产品名称 PRODUCT NO.
1:1	雷永健	TYPE C 14P母座180度SMT H=8.2
日期 DATE	核准 APPROVED	角法 VIEW
2009/10/20	雷永健	版本 VER
		A0