
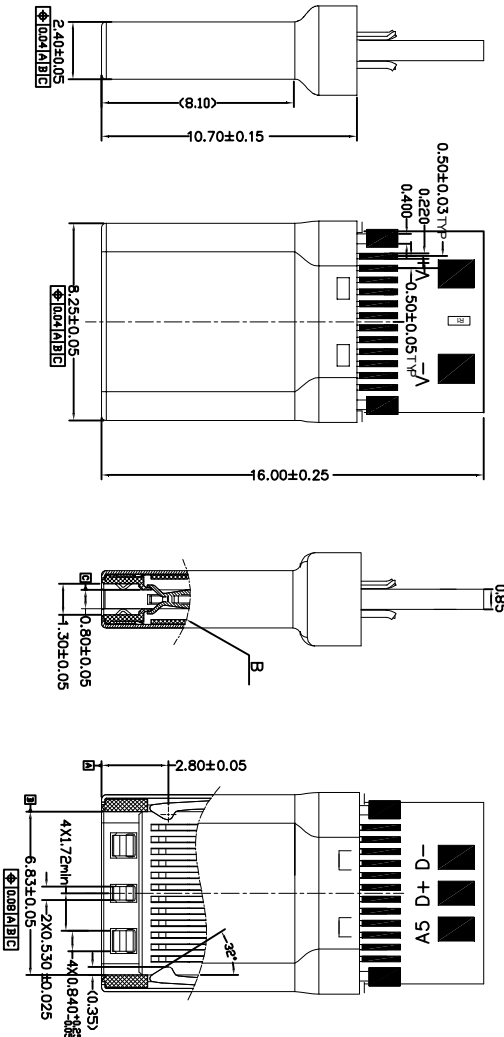



1 2 3 4 5 6 7 8 9 10

Rohs 客户图


目錄 MAPX	變更內容 MODIFICATION	日期 DATE
A0	NEW	09-10-20



Pin Number	host	device	Pin Number	host	device
Pin A1	GND	GND	Pin B12	GND	GND
Pin A2	SSTxp1	SSTxp1	Pin B11	SSRp1	SSRp1
Pin A3	SSTxp1	SSTxp1	Pin B10	SSRp1	SSRp1
Pin A4	VBUS	VBUS	Pin B9	VBUS	VBUS
Pin A5	CC1	CC1	Pin B8	SBU2	SBU2
Pin A6	DP1	DP1	Pin B7		
Pin A7	DN1	DN1	Pin B6		
Pin A8	SBU1	SBU1	Pin B5	CC2	CC2
Pin A9	VBUS	VBUS	Pin B4	VBUS	VBUS
Pin A10	SSRp2	SSRp2	Pin B3	SSTxp2	SSTxp2
Pin A11	SSRp2	SSRp2	Pin B2	SSTxp2	SSTxp2
Pin A12	GND	GND	Pin B1	GND	GND

- NOTES
- 1.MATERIAL: See drawing
 - 2.STANDARD DATA
 - 2.1.Rotating current:5.0A for VBUS (i.e.,pins A4,A9,B4,B9);
 - 1.25A for Vcom and GND (i.e.,pins B5,A11,B12);
 - 0.25A for all the other contacts.
 - 3.ELECTRICAL
 - 3.1.insulator resistance: 100M ohms Min.
 - 3.2.Withstanding voltage: 100 VAC / minute
 - 3.3.Contact resistance: initial 40mohms Max. after 50mohms Max.
 - 4.MECHANICAL
 - 4.1.Mating force: 5~20N
 - 4.2.Umating force : 8~20N
 - 4.3Durability: 10000 cycles Min.
 - 5.PACKING: 100pcs/troy (reference)

6	LATCH	STAINLESS	: Ni: 50u"
5	CONTACT	COPPER ALLOY	Contact area: 5u", Solder tails: Tin80u", Ni: 30~80u"
4	molding 2	L.C.P	(Black)
3	GNDSPRING	STAINLESS	
2	Molding	L.C.P	(Black)
1	SHELL	STAINLESS	Ni: 50u"

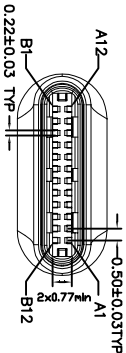

产品图

深圳市鑫风雷电子有限公司

公差一览表 TOLERANCE UNLESS OTHERWISE SPECIFIED				单位 UNITS			
X	±0.30	X'	±5°	比例 SCALE	1:1	审核 CHKD	雷永健
.XX	±0.20	.XX'	±2°	日期 DATE	2009/10/20	核准 APPD	雷永健
.XXX	±0.15	.XXX'	±0.5°	产品料号 PRODUCT PART NO.	25012-UCAM011-X	产品名称 PRODUCT NO.	TYPE C公头拉伸壳第四代C-充电数据版
				角法 VIEW	版本 VER		A0