
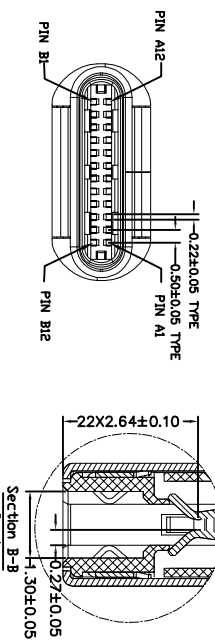
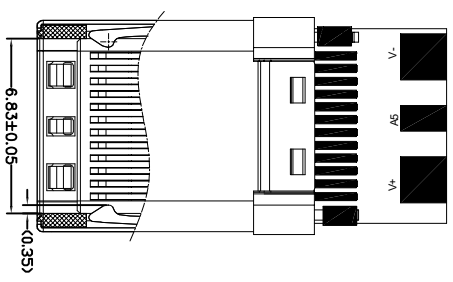
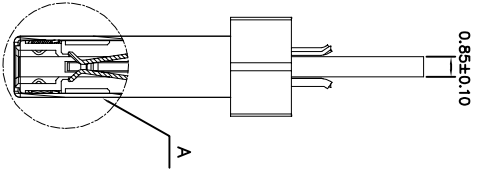
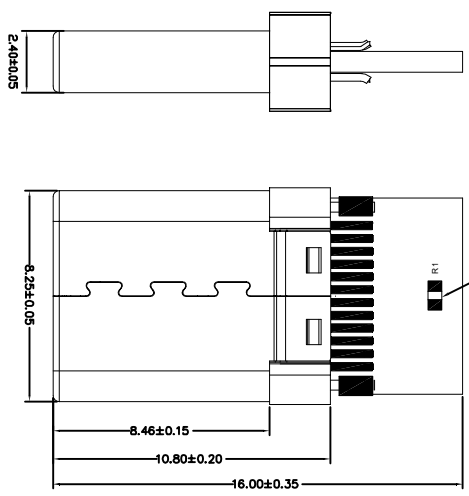


# RoHS 客户图

目錄 MAPX	变更内容 MODIFICATION	日期 DATE
A0	NEW	09-10-20



6	LATCH	STAINLESS	: Ni: 50u"
5	CONTACT	COPPER ALLOY	Contact area: 5u", Solder tails: Tin80u", Ni: 30~80u"
4	molding 2	L.C.P	(Black)
3	GNDSPRING	STAINLESS	
2	Molding	L.C.P	(Black)
1	SHELL	STAINLESS	Ni: 50u"

## 产品图

## 深圳市鑫风雷电子有限公司

公差一览表 TOLERANCE UNLESS OTHERWISE		单位 UNITS	MM
X	±0.30	X	±5°
.X	±0.25	X	±2°
.XX	±0.20	.XX	±1°
.XXX	±0.15	.XXX	±0.5°

Pin#	device	Pin#	device
Pin.A1	GND	Pin.B12	GND
Pin.A2	SSTx01	Pin.B11	SSRxp1
Pin.A3	SSTx01	Pin.B10	SSRxp1
Pin.A4	VBUS	Pin.B9	VBUS
Pin.A5	CC1	Pin.B8	SBU2
Pin.A6	DPI	Pin.B7	
Pin.A7	DN1	Pin.B6	CC2
Pin.A8	SBU1	Pin.B5	CC2
Pin.A9	VBUS	Pin.B4	VBUS
Pin.A10	SSRxp2	Pin.B3	SSTxw2
Pin.A11	SSRxp2	Pin.B2	SSTxw2
Pin.A12	GND	Pin.B1	GND

- 备注:
1. 材料: See Table A
  2. 包装要求: See Table A
  3. 引线特性:
    - 插入力: 5-20N
    - 拔出力: 8-20N, 1000次连续后 (8-20N)
    - 耐久寿命: 10 000次
  4. 电气特性:
    - 接触电阻: 40mOhms Max(Inital)
    - 绝缘电阻: 1000Mohms Min
  5. 额定电流:
    - 5A for VBUS for AA/AB/B4/B9)
    - 1.25A for Vconn and DN1 for A1/A12; B1/B5/B12)
    - 0.25A for all other contacts.
  5. 环境特性:
    - 温度测试: 0~55°C, 4000循环位置无变化
    - 工作温度: -25°C~80°C
    - 5. 使用物料及制程符合RoHS/RE: