

1 2 3 4 5 6 7 8 9 10

Rohs 客户图

目錄
MAPX






設定內容
MODIFICATION

日期
DATE

A0


NEW

09-10-20

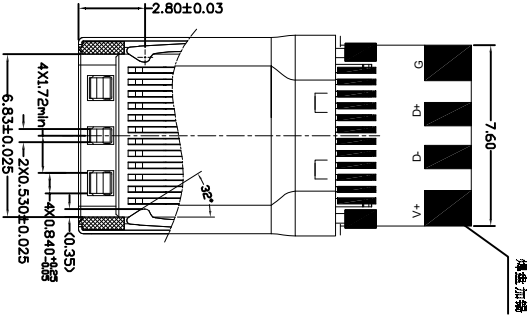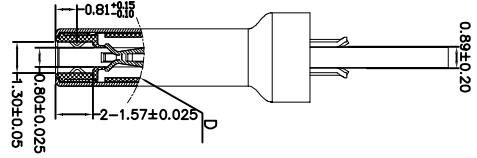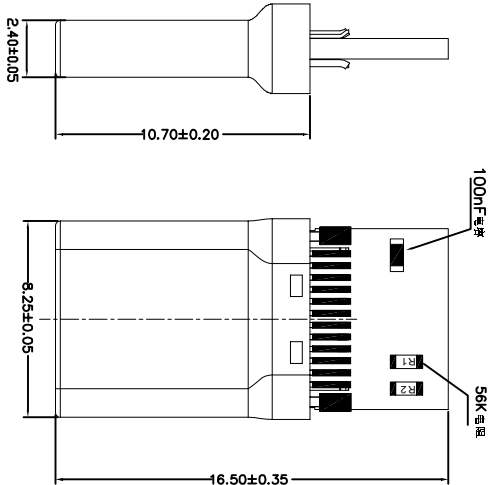

Pin Number	host	device	Pin Number	host	device
Pin A1	GND	GND	Pin B12	GND	GND
Pin A2	SSTxp1	SSTxp1	Pin B11	SSRxp1	SSRxp1
Pin A3	SSTxp1	SSTxp1	Pin B10	SSRxp1	SSRxp1
Pin A4	VBUS	VBUS	Pin B9	VBUS	VBUS
Pin A5	ICCI	ICCI	Pin B8	SBu2	SBu2
Pin A6	DP1	DP1	Pin B7		
Pin A7	DN1	DN1	Pin B6		
Pin A8	SBu1	SBu1	Pin B5	CC2	CC2
Pin A9	VBUS	VBUS	Pin B4	VBUS	VBUS
Pin A10	SSRxp2	SSRxp2	Pin B3	SSTxp2	SSTxp2
Pin A11	SSRxp2	SSRxp2	Pin B2	SSTxp2	SSTxp2
Pin A12	GND	GND	Pin B1	GND	GND

- 备注:
- 材料: See Table A
 - 焊接温度: See Table A
 - 机械性能: See Table A
 - 输入: 8-20N
 - 输出: 8-20N, 1000次焊接后 (8-20N)
 - 耐久寿命: 10,000次
 - 电气性能:
 - 接触阻抗: 40mΩ Max (Initial)
 - 接触阻抗: 100mΩ Max (after)
 - 额定电压: 5A for VBUS For A4/A9/B4/B9, 1.25A for Vccm and GND for A1/A12/B1/B5/B12, 0.25A for all other contacts.
 - 环境性能:
 - 主要测试: 95%湿度, 35°C, 48小时露部位表面氧化
 - 工作温度: -25°C~80°C
 - 使用物料及制程符合RoHS指令。



6	LATCH	STAINLESS	: Ni: 50u"
5	CONTACT	COPPER ALLOY	Contact area: 5u", Solder tails: Tin80u", Ni: 30~80u"
4	molding 2	L.C.P	(Black)
3	GNDSPRING	STAINLESS	
2	Molding	L.C.P	(Black)
1	SHELL	STAINLESS	Ni: 50u"

产品图
PRODUCT CHART DWG

深圳市鑫风雷电子有限公司

公差一览表 TOLERANCE UNLESS OTHERWISE SPECIFIED	单位 UNITS	制图 DRAWING	审核 CHKD	批准 APPRD	产品料号 PRODUCT PART NO.	产品名称 PRODUCT NO.	角法 VIEW	版本 VER
X ±0.30 X ±0.25 XX ±0.20 XXX ±0.15	X' ±5° X' ±2° XX ±1° XXX ±0.5°	王冠	雷永健	雷永健	25012-UCAM008-X	TYPE C公头拉伸壳C-2数据板焊盘加锡		A0
DATE	2009/10/20							