
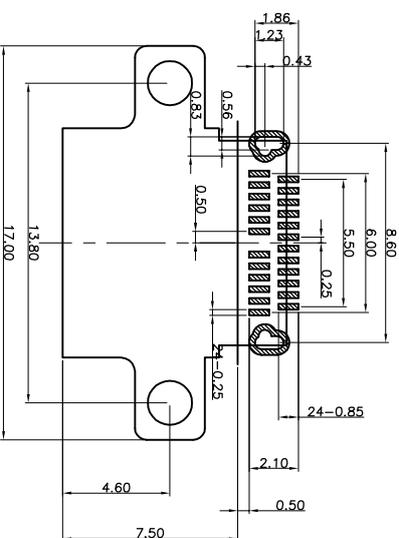
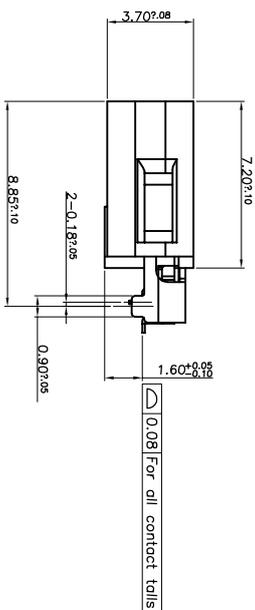
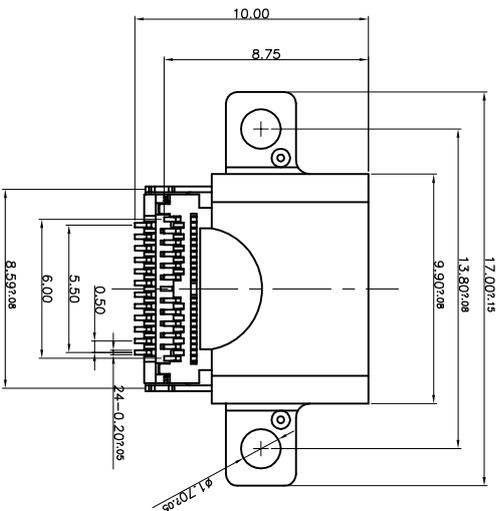
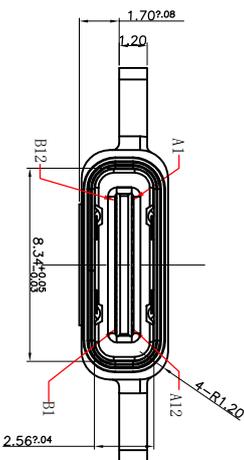
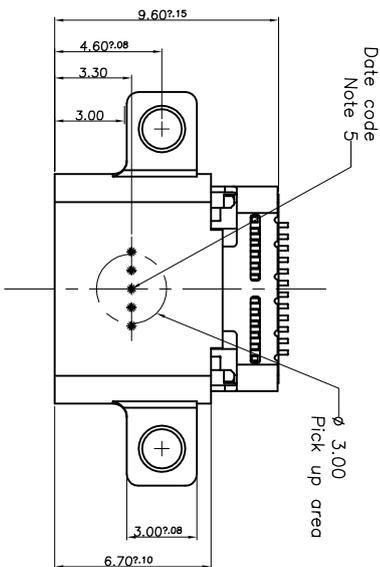


ROHS

客户图

目錄 MAPX	變更內容 MODIFICATION	日期 DATE
A0	NEW	09-10-20



A1	GND	B12	GND
A2	SSTXP1	B11	SSRXP1
A3	SSTXN1	B10	SSRXP1
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10	SSRXN2	B3	SSTXN2
A11	SSRXP2	B2	SSTXP2
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

- Notes:
- Dimension shall be interpreted per ASME Y14.5M1994.
 - Dimension marked ∇ & \blacktriangledown should be checked by Q.C. and process, engineers and ∇ should also check the CPK data.

- Specification:
- Current Rating: 10 AMP
 - Voltage Rating: 30V A.C.DC
 - Dielectric Strength: 500V AC RMS for 1 minute.
 - Contact Resistance: 30 m Ω Max.
 - Insulator Resistance: 500M Ω /Min. AT 250V DC.
 - Mating/Umating cycles: 2000cycles
 - Temperature: -20°C to +60°C

深圳市鑫风雷电子有限公司

产品图 PRODUCT CHART DWG		单位 UNITS		MM	制图 DRAWING	王冠	产品料号 PRODUCT PART NO.	24002-UCAF002-X
公差一览表 TOLERANCE UNLESS OTHERWISE		X	±0.30	X	±5°	审核 CHKD	雷永健	产品名称 PRODUCT NO.
X	±0.25	X	±2°	比例 SCALE	1:1	批准 APPD	雷永健	TYPE C母座防水沉板1.6带螺丝孔
.XX	±0.30	.XX	±1°	日期 DATE	2009/10/20			版本 VER
.XXX	±0.15	.XXX	±0.5°					A0