



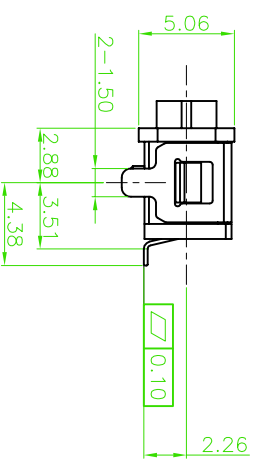
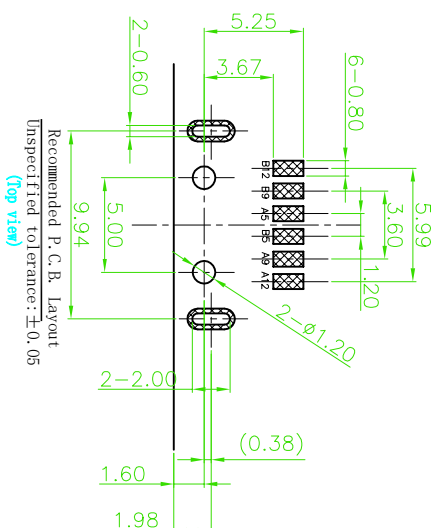
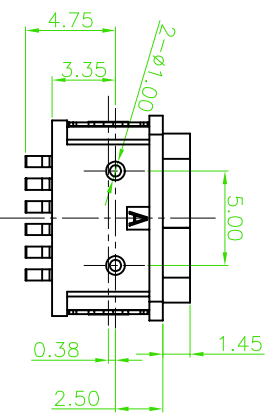
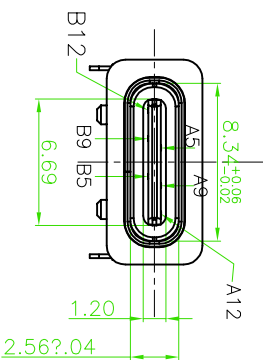


RoHS 客户图

目錄 MAPX A0	變更內容 MODIFICATION NEW	日期 DATE 09-10-20
------------------	-----------------------------	------------------------

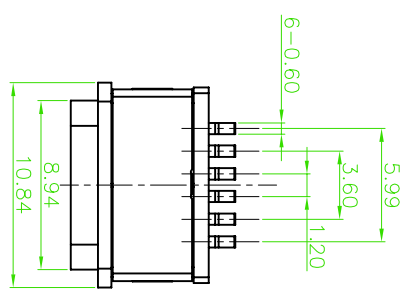

- SPECIFICATION:
- CURRENT RATING: 3.0A MAX
 - DIELECTRIC WITHSTAND VOLTAGE: 100VAC
 - TEMPERATURE RANGE: -30 °C ~ 85 °C
 - CONTACT RESISTANCE: 40 MILLIONHM MAX
 - INSULATION RESISTANCE: 100 MEGOHMS MIN.
 - INSERTION FORCE : 5N~20N
 - UNMATING FORCE: 8N~20N
 - DURABILITY:10,000 CYCLES
 - WATER PROOFNESS:THIS PRODUCT IS BASED ON IPX7.

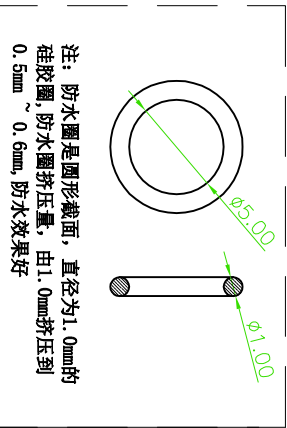

5	Shell2	1	SUS301 Ni Plating T=0.20mm	Ni-40u*Min;
4	Shell1	1	SUS301 Ni Plating T=0.25mm	Ni-40u*Min;
3	Housing2	1	PA10T(G.F30%)	
2	Contact	6	Phosphor bronze CS210R-EH Au/Ni Plating T=0.20mm	Ni-40u*Min; AuCONTACT AREA1u*, OTHER AREA6/G/F
1	Housing	1	PA10T (G.F30%)	

产品图

PRODUCT CHART DWG

公差一览表

TOLERANCE UNLESS OTHERWISE	公差	UNIT	比例	DATE	审核	核准	产品料号	产品名称	TYPE	版本
X	±0.30	X	±5°	2009/10/20	王冠	雷永健	00208-UCAF003-X	6P母座两脚板上型防水	C	A0
X	±0.25	X	±2°		雷永健	雷永健				
XX	±0.30	XX	±1°							
XXX	±0.15	XXX	±0.5°							

A5	CC1	B12	GND
A9	VBUS	B9	VBUS
A12	GND	B5	CC2
PIN	SIGNAL NAME	PIN	SIGNAL NAME