

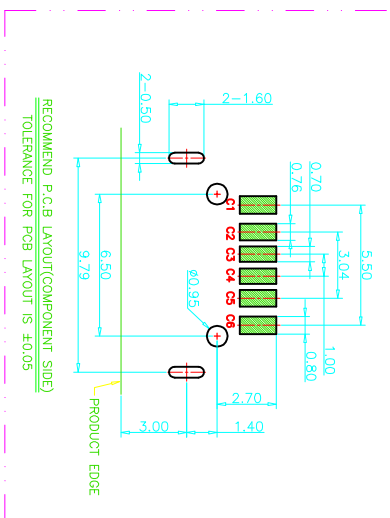






12345678910




RoHS 客户图



- NOTES:
- SPECIFICATION:
- CURRENT RATING: 3.0A MAX
 - VOLTAGE: 100 VAC
 - TEMPERATURE RANGE: -30 °C ~ 85 °C
 - CONTACT RESISTANCE: 40 MILLIONHM MAX
 - INSULATION RESISTANCE: 100 MEGOHMS MIN.
 - INSERTION FORCE: 5N~20N
 - UNMATING FORCE: 8N~20N
 - DURABILITY: 10,000 CYCLES
 - WATER PROOFNESS:THISPRODUCTIS BASED ON IPX7.



加防水圈示意图



5	防水圈	硅胶	BLACK	1PCS
4	SHELL	STAINLESS STEEL	NI Plated	1PCS
3	SHIELDING PLATE	STAINLESS STEEL	NI Plated	1PCS
2	CONTACT	COPPER ALLOY	TIN/AU/NI Plated	1SET
1	HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

产品图

PRODUCT CHART DWG

深圳市鑫风雷电子有限公司

Shenzhen xinfenglei Electronic Co., Ltd

公差一览表

TOLERANCE UNLESS OTHERWISE

单位	MM	制图	王冠	产品料号	00101-UCAF010-X
比例	1:1	审核	雷永健	产品名称	TYPE C 6P母座板上防水型两脚
日期	2009/10/20	核准	雷永健	角法	版本
DATE	2009/10/20	APPD	雷永健	VIEW	VER

PIN ASSIGNMENT:

PIN NO	A1&B12	A4&B9	A5	B5	A9&B4	A12&B1
SIGNAL NAME	GND	VBUS	CC1	CC2	VBUS	GND
PCB PAD NO.	C1	C2	C3	C4	C5	C6