
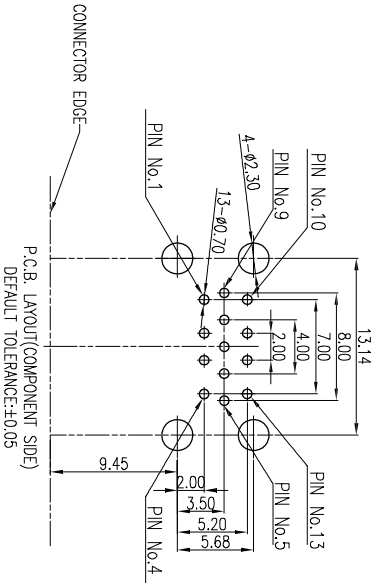
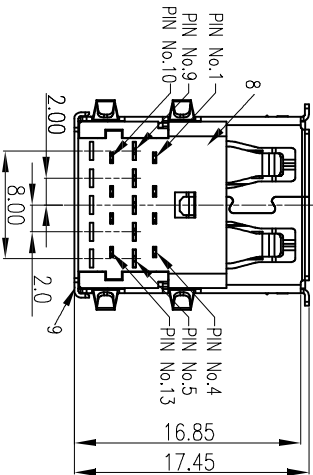
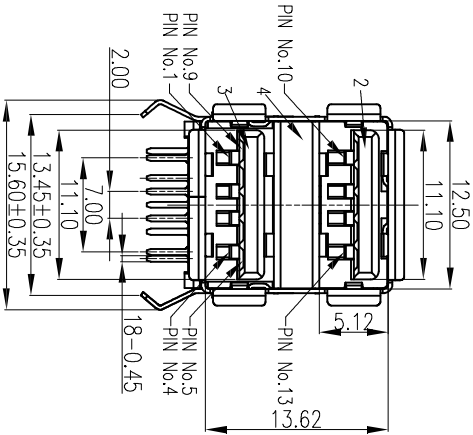
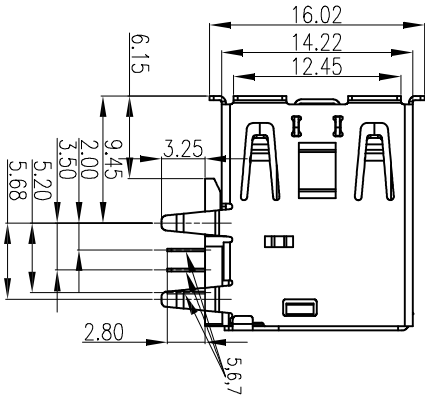


12345678910

Rohs 客户图



产品图

产品图

公差一览表			单位			制图			产品料号		
TOLERANCE UNLESS OTHERWISE			UNITS			DRAWING			PRODUCT PART NO.		
X	±0.30	X'	±5°	比例	1:1	审核	雷永健	产品名称	USB3.0+2.0 DIP 13P弯脚母座	版本	A0
XX	±0.25	XX'	±2°	SCALE		核准	雷永健	角法		版本	A0
XXX	±0.15	XXX'	±0.5°	DATE	2009/10/20	核准	雷永健	角法		版本	A0

目錄 MAPX	設定內容 MODIFICATION	日期 DATE
A0	NEW	09-10-20

- NOTES.
1. MECHANICAL:
- MATING: 35N MAX.
- WITHDRAWAL: 10N MIN.
- DURABILITY: 1500 CYCLES OF COPPER ALLOY, 5000 CYCLES OF SUS
2. ELECTRICAL:
- CURRENT: 1.8A Maximum for pin1 and pin4, and 0.25A for all the other pin.
- VOLTAGE: 30 Vdc (rms)
- WITHSTANDING VOLTAGE: 100V AC
- CONTACT RESISTANCE:
- 30 mΩ (Max) initial for pin1 and pin4.
- 50 mΩ (Max) initial for all other contacts.
- Maximum change of +10mΩ after environmental s
- Measure at 20 mV (Max) open circuit at 100 mA
- DIELECTRIC WITHSTANDING VOLTAGE: 100V AC(RMS)
- INSULATION RESISTANCE: 100MΩ MIN.
3. ENVIRONMENTAL
- TEMPERATURE RANGE -55°C ~ +85°C

1	SHELL	1	SUS304R-1/2H IN 80U"MIN 48H
2	HOUSING	1	PBT+30%GF,BLACK
3	5pin short ter.molding	1	PBT+30%GF,BLUE,ALL 1U" 48H
4	中夹片	1	SUS304R-1/2H IN 80U"MIN 48H
5	5pin short ter.	5	C2680R-H,GOLD 1U" 48H
6	4pin long ter.	4	CS191R-EH,GOLD 1U" 48H
7	4pin short ter.	4	CS191R-EH,GOLD 1U" 48H
8	后塞	1	PBT+30%GF,BLUE
9	后壳	1	SPCC IN 80U"MIN