

1

2

3

4

5

6

7

8






9

10


RoHS

客户图

目錄 MAPX	變更內容 MODIFICATION	日期 DATE
A0	NEW	09-10-20

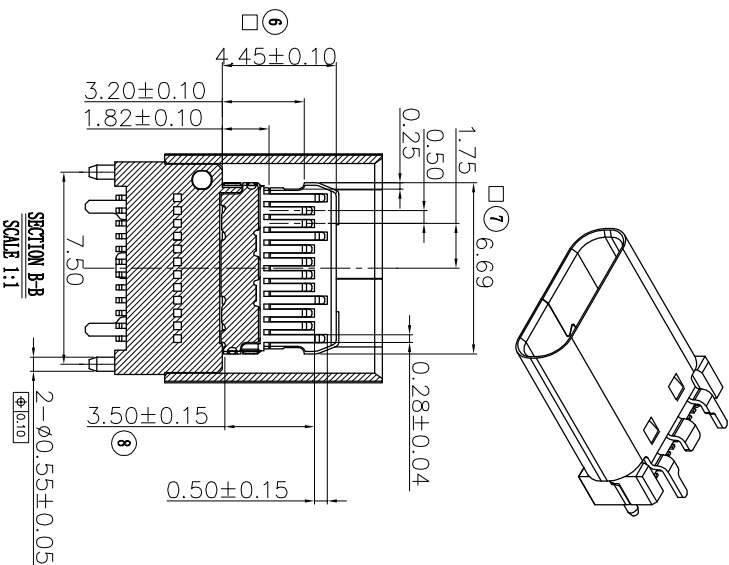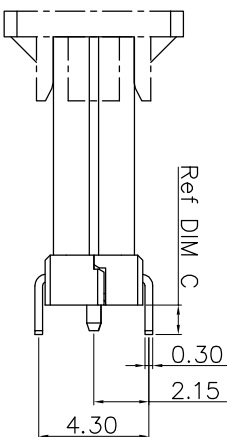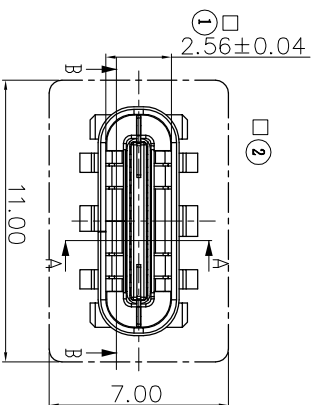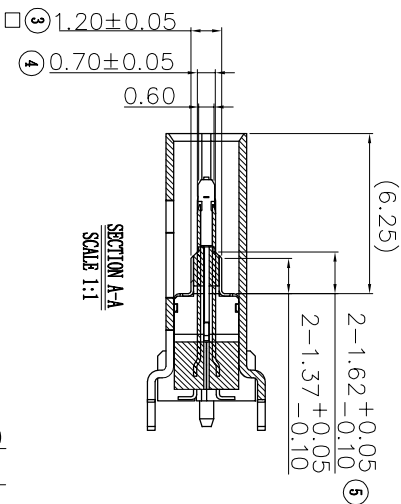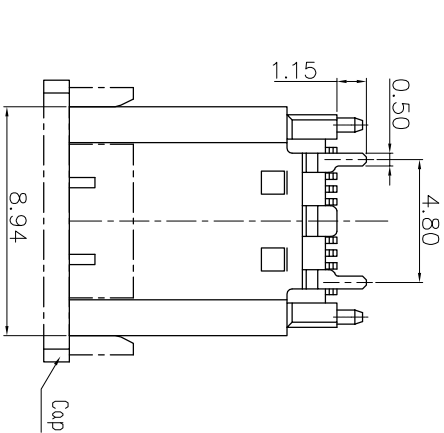

NO	DIM A	DIM B	DIM C
1	10.5	11.50	1.15/2.25
2	9.3	10.30	1.15/2.25

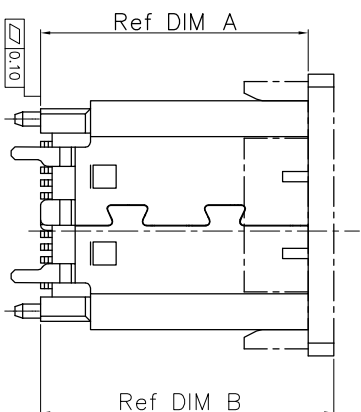

产品图

PRODUCT CHART DWG



深圳市鑫风雷电子有限公司

公差一览表 TOLERANCE UNLESS OTHERWISE				单位 UNITS				制图 DRAWING				产品料号 PRODUCT PART NO.			
X	±0.30	X'	±5°	X	±0.30	X'	±5°	X	±0.30	X'	±5°	X	±0.30	X'	±5°
XX	±0.25	XX'	±2°	XX	±0.30	XX'	±2°	XX	±0.30	XX'	±2°	XX	±0.30	XX'	±2°
XXX	±0.15	XXX'	±0.5°	XXX	±0.15	XXX'	±0.5°	XXX	±0.15	XXX'	±0.5°	XXX	±0.15	XXX'	±0.5°

比例 SCALE	日期 DATE	审核 APPROVED	核准 APPROVED	雷永健	雷永健	角法 VIEW	版本 VER	A0
1:1	2009/10/20	王冠	王冠	王冠	王冠	13001-UCAF008-X	13001-UCAF008-X	13001-UCAF008-X

TYPE C母座16P立式SMT H=10.5脚长2.25	TYPE C母座16P立式SMT H=10.5脚长2.25	TYPE C母座16P立式SMT H=10.5脚长2.25	TYPE C母座16P立式SMT H=10.5脚长2.25
-------------------------------	-------------------------------	-------------------------------	-------------------------------

RoHS 客户图

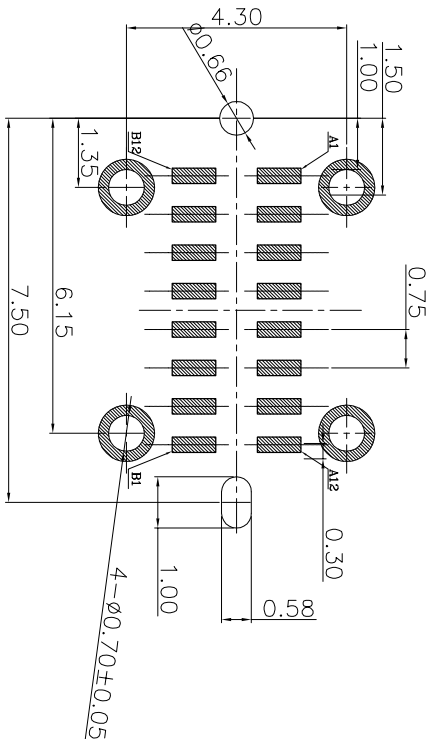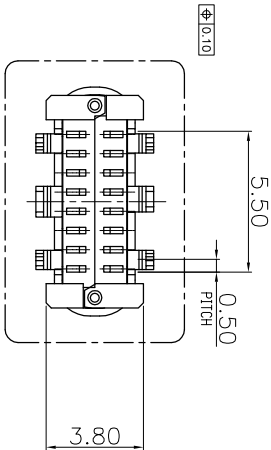

RECOMMENDED P.C.B. LAYOUT (T:1.00mm)
TOLERANCE UNSPECIFIED ±0.05mm

- SPECIFICATIONS:
- MECHANICAL :
 - INSERTION FORCE :5N~20N
 - WITHDRAWAL FORCE :8N~20N AFTER 10,000 CYCLES MATING: 2N MIN.
 - ELECTRICAL :
 - CONTACT CURRENT RATING: 3A .
 - VOLTAGE RATING :30V AC (rms)
 - WITHSTANDING VOLTAGE: 100 VAC FOR 1 MINUTE. INSULATION RESISTANCE: 100 MEGAΩHMS MIN.
 - CONTACT RESISTANCE: 40 MILLIOHMS MAX.
 - ENVIRONMENTAL :
 - OPERATING TEMPERATURE: -25°C TO +85°C

目錄 MAPX	變更內容 MODIFICATION	日期 DATE
A0	NEW	09-10-20

A	B
1 GND	12 GND
2	11
3	10
4 VBUS	9 VBUS
5 CC	8 SBU2
6 D+	7 D-
7 D-	6 D+
8 SBU1	5 CC
9 VBUS	4 VBUS
10	3
11	2
12 GND	1 GND



产品图

公差一览表 TOLERANCE UNLESS OTHERWISE				单位 UNITS				比例 SCALE				日期 DATE			
X	±0.30	X'	±5°	X	±0.25	X'	±2°	X	±0.30	X'	±1°	X	±0.15	X'	±0.5°
.XX	±0.30	.XX'	±2°	.XX	±0.30	.XX'	±2°	.XX	±0.30	.XX'	±1°	.XX	±0.15	.XX'	±0.5°
.XXX	±0.15	.XXX'	±0.5°	.XXX	±0.15	.XXX'	±0.5°	.XXX	±0.15	.XXX'	±0.5°	.XXX	±0.15	.XXX'	±0.5°

12345678910

Rohs 客户图

目錄 MAPX	變更內容 MODIFICATION	日期 DATE
A0	NEW	09-10-20

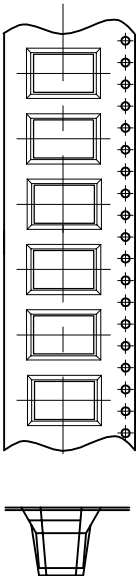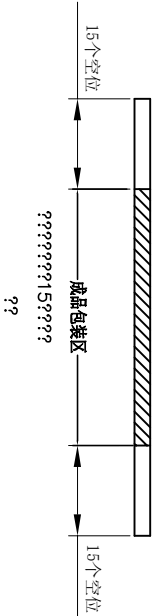

1

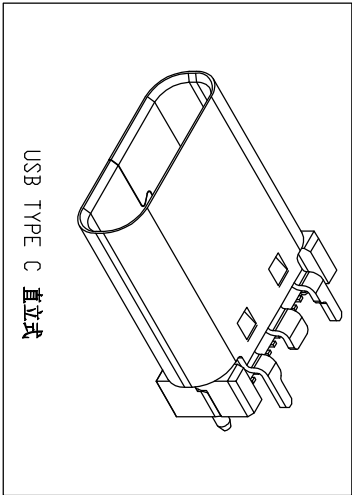
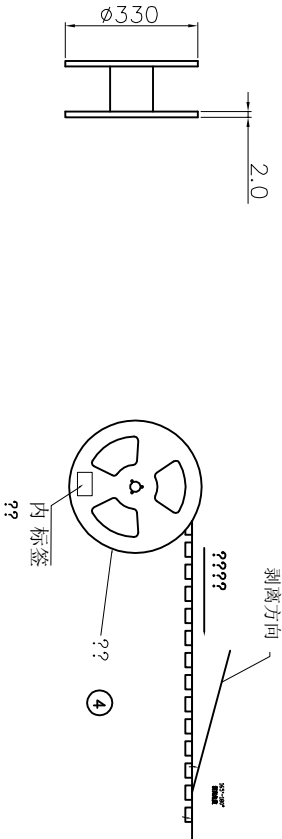



TABLE A	??	??	??
①	USB TYPE C ???	GP PET, W=21.0mm, 热融性	4.5 K
②	???	GP PET, W=24mm P=16mm T=0.50mm(17.68mm)7.68*10	7.68*10
③	??	??330*24.07???	10PCS
④	??	390*390*3mm	2PCS
⑤	??	320(90+140+90)*300mm	4PCS
⑥	??	400*400*335mm K=K	1PCS
⑦	??	600*600*0.15	1PCS

公差一览表 TOLERANCE UNLESS OTHERWISE	单位 UNITS	比例 SCALE	日期 DATE	制图 DRAWING	审核 CHD	核准 APPD	产品料号 PRODUCT PART NO.	产品名称 PRODUCT NO.	角法 VIEW	版本 VER
X ±0.30	X'	±5'	2009/10/20	王冠	雷永健	雷永健	13001-UCAF008-X	TYPE C母座 16P立式SMT H=10.5脚长2.25	⊕	A0
X ±0.25	X'	±2'								
.XX ±0.30	.XX'	±1'								
.XXX ±0.15	.XXX'	±0.5"								



产品图

PRODUCT CHART DWG

深圳市鑫风雷电子有限公司

RoHS 客户图

目 录	设 变 内 容	日 期
MAPX	MODIFICATION	DATE
A0	NEW	09-10-20

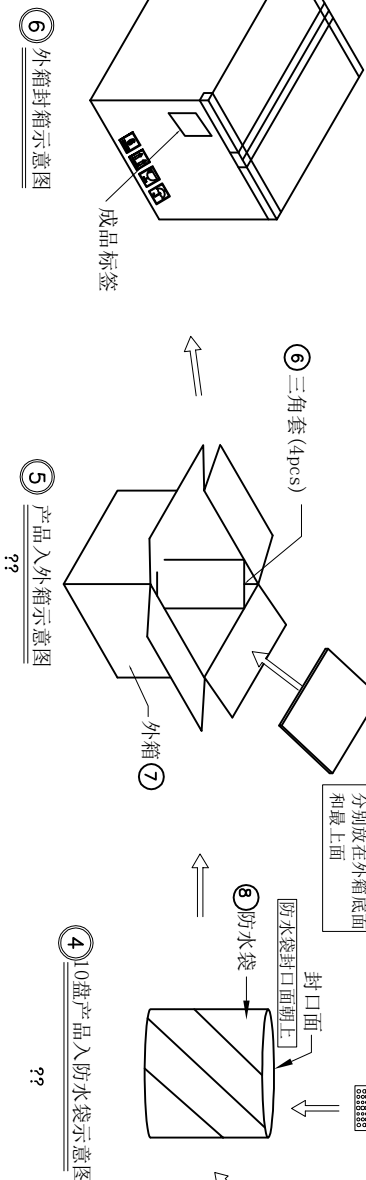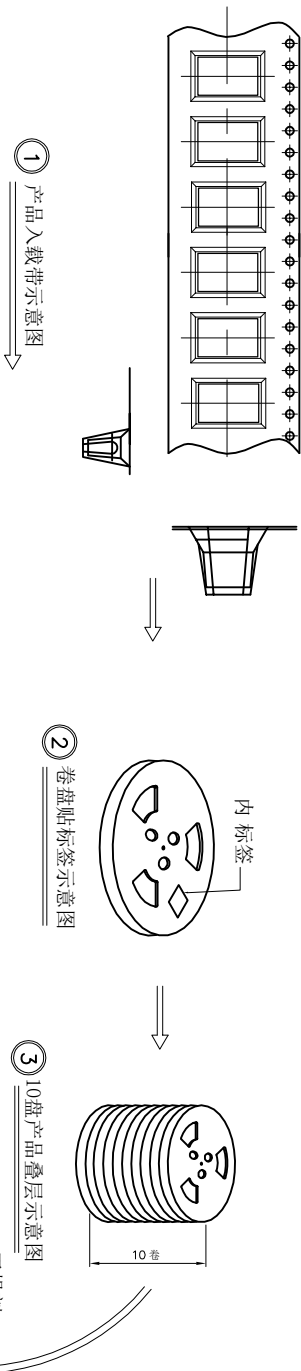

- 包装说明:
1. 将检验好的成品: SMT朝下放入载带底部; 每卷装450PCS产品; 具体如图一所示
 2. 将包装好的产品: 每盘必需贴上内标签; 具体如图二所示
 3. 将贴好内标签的产品每10盘叠一层装入防水袋中并加一包干燥剂; 装好后将防水袋封好; 具体如图三图四所示
 4. 先将1pcs平卡放入纸箱底部; 然后将装好产品的防水袋装入纸箱中; 防水袋热熔封口, 封口面需朝上; 并将4PCS三角套分别装入4个角; 如图五所示
 5. 装好后将1pcs平卡放入纸箱最上面并封好纸箱及贴好相关标签; 具体如图六所示; (产品包装的标签, 如客户要求, 请按客户要求包装出货)
 6. 载带前面和后面各留16PCS空格
 7. COVER与CARRY剥离力: 50-125g, 速度: 300mm/分钟左右, 剥离角度: 165° - 180°

产品图

深圳市鑫风雷电子有限公司

公差一览表				单位				比例			
TOLERANCE UNLESS OTHERWISE				UNITS				SCALE			
X	±0.30	X'	±5'	X	±0.25	X'	±2'	X	±0.30	X'	±1'
.XX	±0.30	.XX'	±2'	.XX	±0.30	.XX'	±1'	.XX	±0.30	.XX'	±1'
.XXX	±0.15	.XXX'	±0.5'	.XXX	±0.15	.XXX'	±0.5'	.XXX	±0.15	.XXX'	±0.5'