

RoHS

客户图

目錄
MAPX



设变内容
MODIFICATION

日期
DATE




A0

NEW


09-10-20

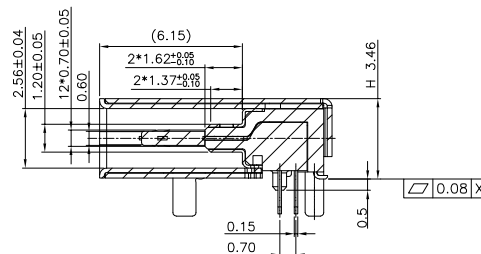

Section A-A



Detail A



- NOTES:
- 1.MATERIAL:
MOLDING: LCP UL94 V-0
CONTACT: COPPER ALLOY.
GOLD PLATED Min ON CONTACT AREA, 100u"
Min TIN (LEAD FREE) ON SOLDER AREA,
SHELL: SUS304-H, T=0.20±0.03mm
50u" NICKEL PLATING OVER ALL.
SHILD: SUS304-H, T=0.12±0.03mm
 - 2.MECHANICAL:
INSERTION: 5~20N.
EXTRACTION: 8~20N AFTER TEST.
DURABILITY: 10000 CYCLES
 - 3.ELECTRICAL:
CURRENT: 5A FOR VBUS;
1.25A FOR GND PIN.
0.25A FOR OTHER.
VOLTAGE: 20 V MAX
WITHSTANDING VOLTAGE: 100V AC R.M.S.
CONTACT RESISTANCE: 40mΩ MAX.
INSULATION RESISTANCE: 100MΩ MIN.
 - 4.ENVIRONMENTAL
TEMPERATURE RANGE -55°C ~ +85°C

产品图

PRODUCT CHART DWG

深圳市鑫风雷电子有限公司

公差一览表

TOLERANCE UNLESS OTHERWISE

X.	±0.30	X'.	±5'
.X	±0.25	.X'	±2'
.XX	±0.30	.XX'	±1'
.XXX	±0.15	.XXX'	±0.5'

单位
UNITS

MM

制图
DRAWING

王冠

产品料号
PRODUCT PART NO.

00501-UCAF010-X

比例
SCALE

1:1

审核
CHKD

雷永健

产品名称
PRODUCT NO.

TYPE C母座板上双壳前插后贴24P L=10.0

日期
DATE

2009/10/20

核准
APPD

雷永健

角法
VIEW



版本
VER

A0

RoHS

客户图

目錄
MAPX



设变内容
MODIFICATION

日期
DATE

A0

NEW

09-10-20

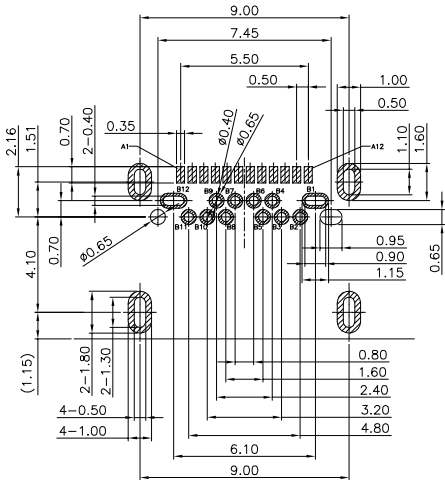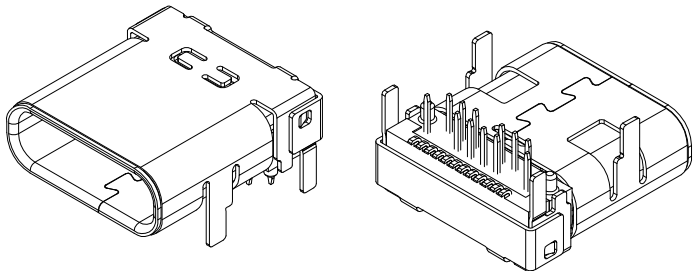

PIN	Signal Name	Description	PIN	Signal Name	Description
A1	GND	Ground return	B12	GND	Ground return
A2	SSTXp1	Positive half of first SuperSpeed TX differential pair	B11	SSRXp1	Positive half of first SuperSpeed RX differential pair
A3	SSTXn1	Negative half of first SuperSpeed TX differential pair	B10	SSRXn1	Negative half of first SuperSpeed RX differential pair
A4	Vbus	Bus Power	B9	Vbus	Bus Power
A5	CC1	Configuration Channel	B8	SBU2	Sideband Use (SBU)
A6	Dp1	Positive half of the USB 2.0 differential pair-Position 1	B7	Dn2	Negative half of the USB 2.0 differential pair-Position 2
A7	Dn1	Negative half of the USB 2.0 differential pair-Position 1	B6	Dp2	Positive half of the USB 2.0 differential pair-Position 2
A8	SBU1	Sideband Use (SBU)	B5	CC2	Configuraation Channel
A9	Vbus	Bus Power	B4	Vbus	Bus Power
A10	SSRXn2	Negative half of second SuperSpeed RX differential pair	B3	SSTXn2	Negative half of second SuperSpeed TX differential pair
A11	SSRXp2	Positive half of second SuperSpeed RX differential pair	B2	SSTXp2	Positive half of second SuperSpeed TX differential pair
A12	GND	Ground return	B1	GND	Ground return

产品图

PRODUCT CHART DWG

公差一览表

TOLERANCE UNLESS OTHERWISE

X.	±0.30	X'.	±5'
.X	±0.25	.X'	±2'
.XX	±0.30	.XX'	±1'
.XXX	±0.15	.XXX'	±0.5'

深圳市鑫风雷电子有限公司

单位
UNITS

MM

制图
DRAWING

王冠

产品料号
PRODUCT PART NO.

00501-UCAF010-X

比例
SCALE

1:1

审核
CHKD

雷永健

产品名称
PRODUCT NO.

TYPE C母座板上双壳前插后贴24P L=10.0

日期
DATE

2009/10/20

核准
APPD

雷永健

角法
VIEW

版本
VER

A0

RoHS

客户图

目錄
MAPX

设变內容
MODIFICATION


日期
DATE

A0

NEW


09-10-20

出料方向
PULL OUT DIRECTEON

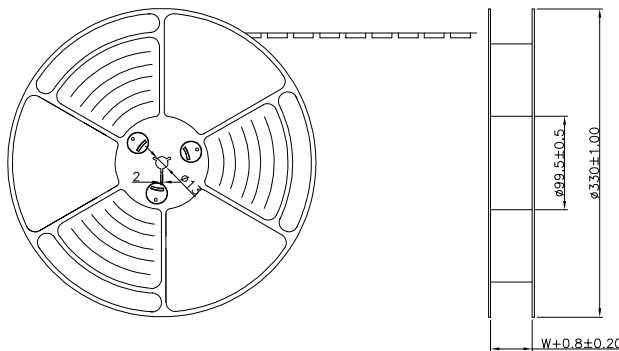


NOTES

1.帶子引導長度
LEAD TAPE LENGTH
出料方向
PULL OUT DIRECTEON

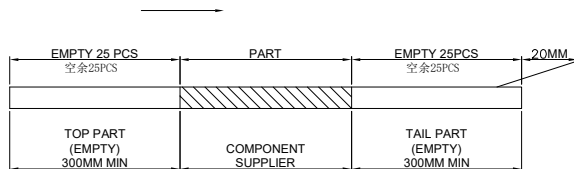

2.上帶 剝力力為: 0.1~1.3N(10.2gf~130gf)
PEELING OFF FORCE OF TOP TAPE:0.1~1.3N(10.2gf~130gf)
出貨運輸過程中一定注意:
THIS REQUIREMENT SHOULD BE APPLIED AT SHIPMENT:
卷帶在運輸過程中不能散開
PEELING OFF SHOULD NOT BE ALLOWED DURING TRANSPORTATION



产品图

PRODUCT CHART DWG

深圳市鑫风雷电子有限公司

公差一览表

TOLERANCE UNLESS OTHERWISE

X.	±0.30	X'.	±5'
.X	±0.25	.X'	±2'
.XX	±0.30	.XX'	±1'
.XXX	±0.15	.XXX'	±0.5'

单位
UNITS

MM

制图
DRAWING

王冠

产品料号
PRODUCT PART NO.

00501-UCAF010-X

比例
SCALE

1:1

审核
CHKD

雷永健

产品名称
PRODUCT NO.

TYPE C母座板上双壳前插后贴24P L=10.0

日期
DATE

2009/10/20

核准
APPD


雷永健

角法
VIEW

版本
VER


A0

目錄 MAPX	設變內容 MODIFICATION	日期 DATE
A0	NEW	09-10-20

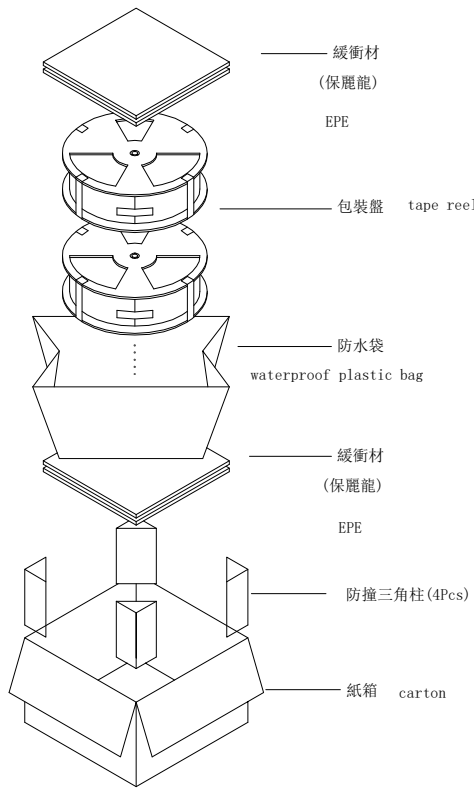

at small positioning hole of the carrier tape side).
標籤黏貼處 (朝捲裝包材的小定位孔一側)

Location of label sticking (label)

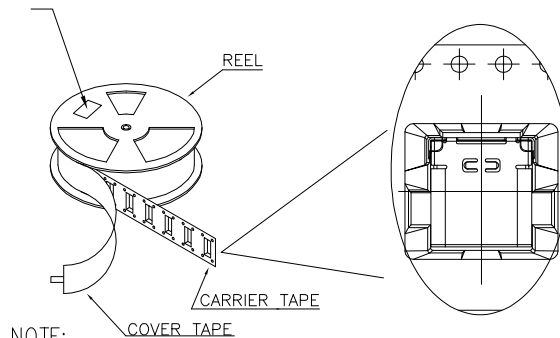

NOTE:

1.每捲包裝數量及每箱裝箱數量如左下表格。

Packing q'ty of each reel & carton as below table shown.

2.以上膠帶覆蓋下包裝帶經包裝機熱熔包裝

Use cover tape to cover and hot melt machine to seal up.

3.每個紙箱放2個珍珠棉

Every carton use 2pcs EPE.

4.將裝滿產品的卷盤放入紙箱并以膠帶封口

Put reels in the carton and use adhesive tape to seal up.

产品图 PRODUCT CHART DWG				深圳市鑫风雷电子有限公司					
公差一览表 TOLERANCE UNLESS OTHERWISE				单位 UNITS	MM	制图 DRAWING	王冠	产品料号 PRODUCT PART NO.	00501-UCAF010-X
X.	±0.30	X'.	±5'	比例 SCALE	1:1	审核 CHKD	雷永健	产品名称 PRODUCT NO.	TYPE C母座板上双壳前插后贴24P L=10.0
.X	±0.25	.X'	±2'						
.XX	±0.30	.XX'	±1'	日期 DATE	2009/10/20	核准 APPD	雷永健	角法 VIEW	版本 VER
.XXX	±0.15	.XXX'	±0.5'						

產品料號 (PRODUCT No.)	包裝容量 (PACKING CAPACITY)			重量 WEIGHT (Kg)		
	PCS/REEL	REELS/CARTON	PCS/CARTON	N.W./PCS	N.W./BOX	G.W./BOX
XFL-001-UCAF010-X	700	8	5600	0.704		