


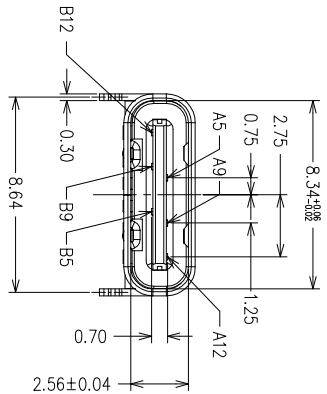
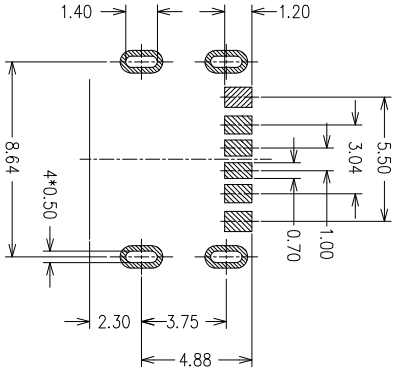



12345678910

RoHS 客户图

目錄 MAPX	變更內容 MODIFICATION	日期 DATE
A0	NEW	09-10-20



SPECIFICATION

1. ELECTRICAL CHARACTERISTICS:

1-1. VOLTAGE/CURRENT RATING: DC 30V MAX&3A

1-2. CONTACT RESISTANCE: 40mΩ MAX INITIAL.

1-3. INSULATION RESISTANCE: 100MΩ MIN FOR VOLTAGE 100VDC.

1-4. DIELECTRIC WITHSTAND: 100V AC for 1 MIN/UTE


1-5. OPERATING TEMPERATURE: -25℃~+85℃

2. MECHANICAL CHARACTERISTICS:

2-1. INSERT FORCE: 5-20N Max

2-2. WITHDRAW FORCE: 5-20N Min

2-3. LIFE TEST :5,000 CYCLES



NO.	DESCRIPTION	MATERIAL	REMARKS	QTY
4	SHELL	STAINLESS STEEL	Ni Plated	1PCS
3	NO	COPPER ALLOY	BLACK	1PCS
2	CONTACT	COPPER ALLOY	Au/Ni Plated	1SET
1	HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS

产品图
PRODUCT CHART DWG

深圳市鑫风雷电子有限公司

公差一览表 TOLERANCE UNLESS OTHERWISE				单位 UNITS	制图 DRAWING	审核 CHECK	至 冠	产品料号 PRODUCT PART NO.	01002-UCAF003-X
X	±0.30	X'	±5°	比例 SCALE	1:1	审核 CHECK	雷永健	产品名称 PRODUCT NO.	TYPE 0 6P每板上SMT 距长1.1
.XX	±0.25	.X'	±2°	日期 DATE	2009/10/20	核准 APPR	雷永健	角法 VIEW	版本 VER
.XXX	±0.15	.XXX'	±0.5°						A0