
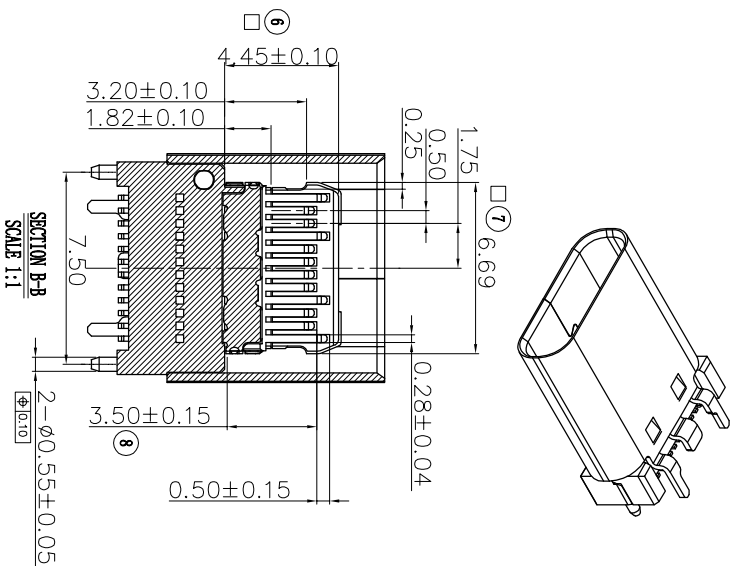
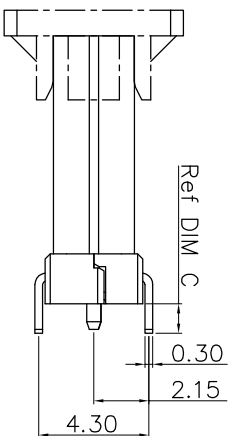
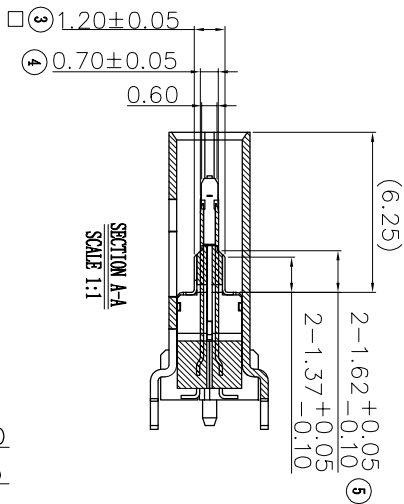
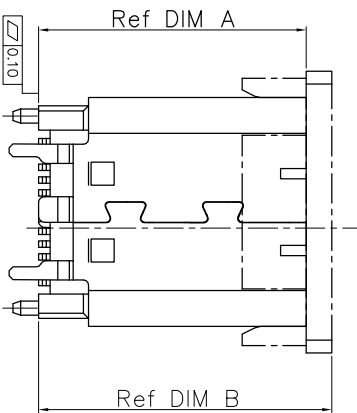
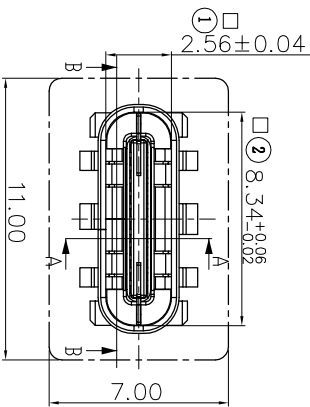


RoHS 客户图

目錄 MAPX	變更內容 MODIFICATION	日期 DATE
A0	NEW	09-10-20

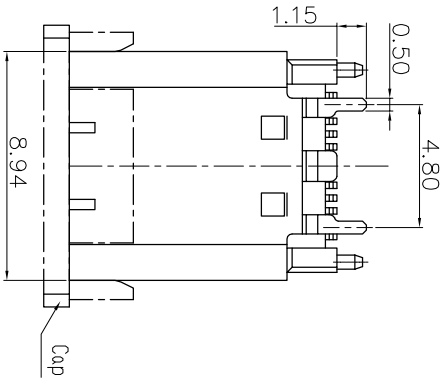

NO	DIM A	DIM B	DIM C
1	10.5	11.50	1.15/2.25
2	9.3	10.30	1.15/2.25

产品图



PRODUCT CHART DWG

深圳市鑫风雷电子有限公司

公差一览表 TOLERANCE UNLESS OTHERWISE				单位 UNITS	制图 DRAWING	审核 CHKD	产品料号 PRODUCT PART NO
X	±0.30	X'	±5°	MM	王冠	雷永健	13001-UCAF005-X
X	±0.25	X'	±2°	SCALE	比例 SCALE	1:1	产品名称 TYPE
.XX	±0.30	.XX'	±1°	DATE	日期 DATE	2009/10/20	C母座24立式SMT H=9.3脚长2.25
.XXX	±0.15	.XXX'	±0.5°	核准 APPD	雷永健	角法 VIEW	版本 VER

12345678910

RoHS 客户图

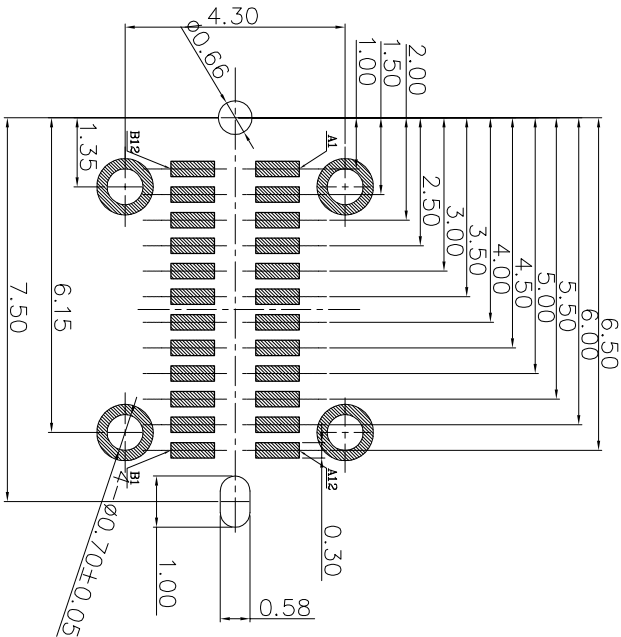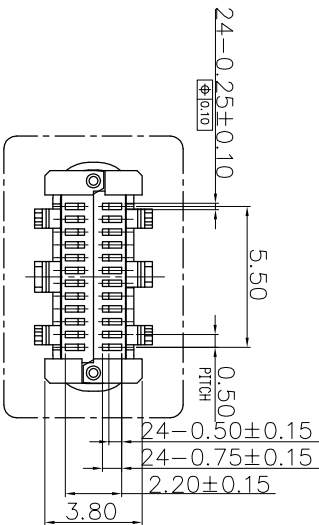

RECOMMENDED P.C.B. LAYOUT (T:1.00mm)
TOLERANCE UNSPECIFIED ±0.05mm

- SPECIFICATIONS:
- MECHANICAL :
 - INSERTION FORCE :5N~20N
 - WITHDRAWAL FORCE :8N~20N AFTER 10,000 CYCLES MATING: 2N MIN.
 - ELECTRICAL :
 - CONTACT CURRENT RATING: 3A .
 - VOLTAGE RATING :30V AC (rms)
 - WITHSTANDING VOLTAGE: 100 VAC FOR 1 MINUTE.
 - INSULATION RESISTANCE: 100 MEGAOHMS MIN.
 - ENVIRONMENTAL :
 - OPERATING TEMPERATURE: -25°C TO +85°C

目錄 MAPX	變更內容 MODIFICATION	日期 DATE
A0	NEW	09-10-20

Pin	Signal Name	Description	Pin	Signal Name	Description
A1	GND	Ground return	B12	GND	Ground return
A2	SSTXp1	Positive half of first SuperSpeed TX differential pair	B11	SSRXp1	Positive half of first SuperSpeed RX differential pair
A3	SSTXn1	Negative half of first SuperSpeed TX differential pair	B10	SSRXn1	Negative half of first SuperSpeed RX differential pair
A4	Vbus	Bus Power	B9	Vbus	Bus Power
A5	CC1	Configuration Channel	B8	SBU2	Sideband Use (SBU)
A6	Dp1	Positive half of the USB 2.0 differential pair-Position 1	B7	Dm2	Negative half of the USB 2.0 differential pair-Position 2
A7	Dn1	Negative half of the USB 2.0 differential pair-Position 1	B6	Dp2	Positive half of the USB 2.0 differential pair-Position 2
A8	SBU1	Sideband Use (SBU)	B5	CC2	Configuration Channel
A9	Vbus	Bus Power	B4	Vbus	Bus Power
A10	SSRXn2	Negative half of second SuperSpeed RX differential pair	B3	SSTXn2	Negative half of second SuperSpeed TX differential pair
A11	SSRXp2	Positive half of second SuperSpeed RX differential pair	B2	SSTXp2	Positive half of second SuperSpeed TX differential pair
A12	GND	Ground return	B1	GND	Ground return



产品图

深圳市鑫风雷电子有限公司





公差一览表 TOLERANCE UNLESS OTHERWISE UNITS				单位 UNITS	制图 DRAWING	产品料号 PRODUCT PART NO.
X	±0.30	X'	±5°	MM	王冠	13001-UCAF005-X
X	±0.25	X'	±2°	比例 SCALE	雷永健	产品名称 TYPE C母座24P立式SMT H=9.3脚长2.25
.XX	±0.30	.XX'	±1°	日期 DATE	核准 APPR	角法 VIEW
.XXX	±0.15	.XXX'	±0.5°	2009/10/20	雷永健	版本 VER
						A0

12345678910

Rohs 客户图

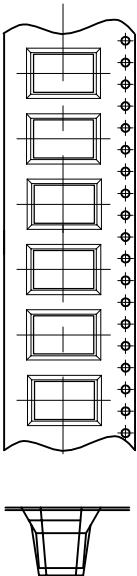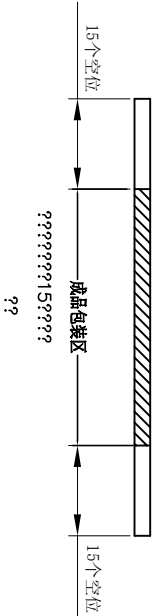

1

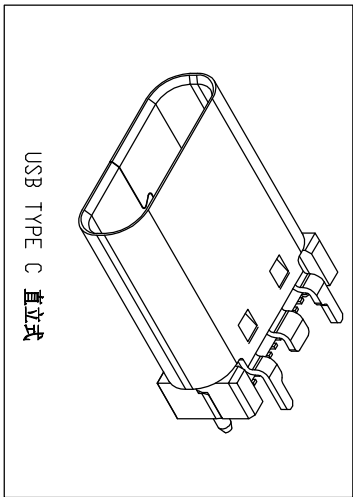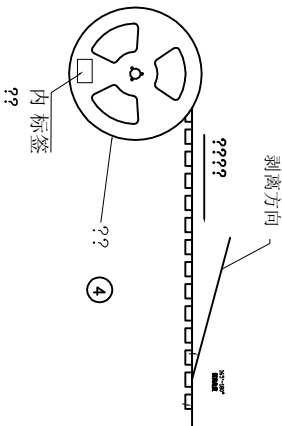

USB TYPE C 直立式

TABLE A			
??	??	??	??
①	USB TYPE C ???		4.5 K
②	???	GP PET, W=21.0mm, 热融性	7.68*10
③	??	GP PET W=24mm P=16mm T=0.50mm(17.68*10	
④	??	??330*24.0???	10PCS
⑤	??	390*390*3mm	2PCS
⑥	???	320(90+140+90)*300mm	4PCS
⑦	??	400*400*335mm K=K	1PCS
⑧	???	600*600*0.15	1PCS

产品图				深圳市鑫风雷电子有限公司			
PRODUCT CHART DWG							
公差一览表				单位	MM	制图	王冠
TOLERANCE UNLESS OTHERWISE				UNITS		DRAWING	
X	±0.30	X'	±5'	比例	1:1	审核	雷永健
X	±0.25	X'	±2'	SCALE		核准	雷永健
.XX	±0.30	.XX'	±1'	日期	2009/10/20	角法	⊕ ⊖
.XXX	±0.15	.XXX'	±0.5'	DATE		版本	VER
				13001-UCAF005-X			
				TYPE C母座24立式SMT H=9.3脚长2.25			
				A0			

AO	NEW	09-10-20



1. 将检验好的废品: SMT朝下放入载带底部, 每卷装450PCS产品, 具体如图一所示
2. 将包好的产品: 每盘必须贴盘上内标签, 具体如图二所示
3. 将贴好内标签的产品每10盘叠一层装入防水袋中并加一包干燥剂, 装好后将防水袋封好, 具体如图三图四所示
4. 先将1pcs平放入纸箱底部; 然后将将好的产品防水袋装入纸箱中; 防水袋热烙封口, 封口面需朝上; 并将#PCB三角叠分别装入4个角, 如图五所示
5. 装好后再将1pcs平卡放入纸箱最上面并封好纸箱及贴好相关标签, 具体如图六所示; (产品包装的标签, 如客户有要求, 请按客户要求包装出货)
6. 载带前部和后面各留16PCS空格
7. COVER与CARRY剥离力: 50~125g, 速度: 300mm/分钟左右, 剥离角度: 165°~180°

产品图				深圳市鑫风雷电子有限公司						
PRODUCT CHART DWG										
公差一览表										
TOLERANCE UNLESS OTHERWISE										
X.	±0.30	X.	±5°	单位	MM	制图	王冠	产品料号	13001-UCAF005-X	
.X	±0.25	.X	±2°	比例	1:1	审核	雷永健	产品名称	TYPE 0母座2P4立式SMT H=9.3脚长2.2	
.XX	±0.30	.XX	±1°	日期	2009/10/20	核准	雷永健	角法	版本	A0
.XXX	±0.15	.XXX	±0.5°	DATE	2009/10/20	核准	雷永健	VIEW	VER	