




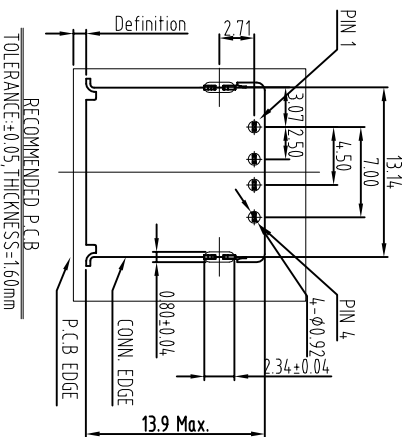




ROHS 客户图

| | | |
|------------|----------------------|------------|
| 目錄 MAPX | 變更內容 MODIFICATION | 日期 DATE |
| A0 | NEW | 09-10-20 |



- NOTES:
- 1.MATERIAL:
TERMINALS: PHOSPHOR BRONZE C5191 ;
SHELL:STAINLESS STEEL SUS301 1/2H;
HOUSING: LCP+30%GF UL94V-0 ,COLOR:NATURAL COLOR;
 - 2.PLATING:
TERMINALS :CONTACT AREA PLATING Au:30U" Min,
EXCEPT SOLDERING AREA:AMATITE Sn 50" Min,OVERALL PLATING Ni:50U" ;
SHELL :ALLOYER PLATING Ni:50U" Min,EXCEPT SOLDERING AREA:AMATITE Sn 50" Min,;
 - 3.ELECTRICAL CHARACTERISTICS :
RATED CURRENT : 2.0 A
CONTACT RESISTANCE: 30 MAX
INSULATION RESISTANCE: 1000M MIN;
RESISTANCE VOLTAGE: 500V AC/DC;
 - 4.MECHANICAL CHARACTERISTICS:
INSERTION FORCE:3.57kgf Max;
EXTRACTION FORCE:0.82kgf Min
DURABILITY:10000CYELES;
 - 5.ENVIRONMENTAL CHARACTERISTICS:
OPERATING TERPERATURE:-25~+85?;
 - 6.MARKED SYMBOL DESCRIPTION
MARKED SYMBOL "▲" ARE CRITICAL DIMENSIONS;
MARKED SYMBOL "◇" IS CPK CONTROL DIMENSION.

产品图

深圳市鑫风雷电子有限公司

| | | | | | | | |
|---|-------|-------------|-------|---------------|-----|--------------------------|----------------------|
| 公差一览表 TOLERANCE UNLESS OTHERWISE SPECIFIED | | 单位 UNITS | MM | 制图 DRAWING | 王冠 | 产品料号 PRODUCT PART NO. | 26009-U2AF004-X |
| X | ±0.30 | X | ±5' | 审核 CHECK | 雷永健 | 产品名称 PRODUCT NO. | USB AF 90度无后盖鱼叉脚有边胶型 |
| X | ±0.25 | X | ±2' | 核准 APPD | 雷永健 | 角法 VIEW | ⊕ ⊖ |
| XX | ±0.30 | XX | ±1' | 版本 VER | | | A0 |
| XXX | ±0.15 | XXX | ±0.5' | | | | |