

RoHS 客户图

目錄 MAPX	變更內容 MODIFICATION	日期 DATE
A0	NEW	09-10-20

规格说明:Specifications:

电气特性:Electrical:

- 额定电流: Current Rating
5A/contact terminal
- 额定电压: Voltage Rating
30V DC
- 接触电阻:Contact Resistance
30 milliohms MAX
- 耐电压:Dielectric Withstanding Voltage:
500 V AC AT Sea Level
- 绝缘电阻:Insulation Resistance:
1000MEGA ohms MIN

物理性能:Mechanical:

- 插拔力: Connector Mate and Unmate Force
Mate force:3.57kgf(MAX)
Unmate force:1.02kgf(MIN)

原材料:Matorial:

- 塑胶:Housing:BPT,LCP

电镀:Finish:





- 端子:Contact:Copper Alloy C2680
- 外壳:Shell: Copper Alloy C2680/SPCC
- 端子:Contact: Plated Gold in Mating Area;
Tin On Solder Tails

端子四周镀50U”(MIN)锡,镀金区域镀100-200U”镀金3U”

2.外壳:Shell:

铜壳四周镀80U”(MIN)锡

Nickel Plating

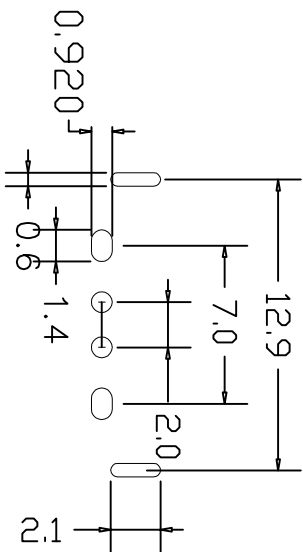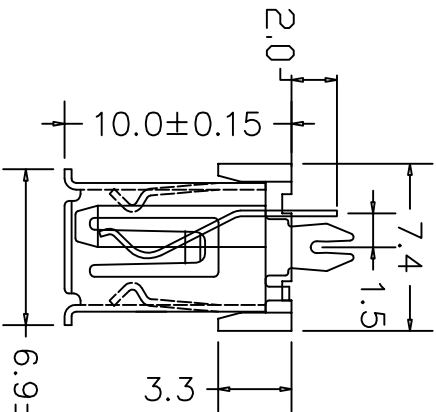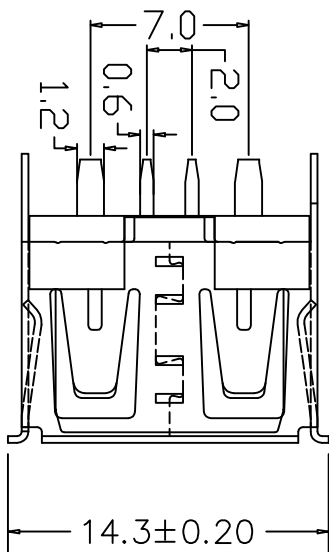

产品图

PRODUCT CHART DWG

深圳市鑫风雷电子有限公司

公差一览表 TOLERANCE UNLESS OTHERWISE SPECIFIED				单位 UNITS	制图 DRAWING	产品料号 PRODUCT PART NO.
X	±0.30	X'	±5°	比例 SCALE	王冠	00504-U2AF061-A
.X	±0.25	.X'	±2°	1:1	审核 CHKD	雷永健
.XX	±0.30	.XX'	±1°	日期 DATE	2009/10/20	雷永健
.XXX	±0.15	.XXX'	±0.5°	核准 APPD	雷永健	角法 VIEW
						版本 VER
						A0