
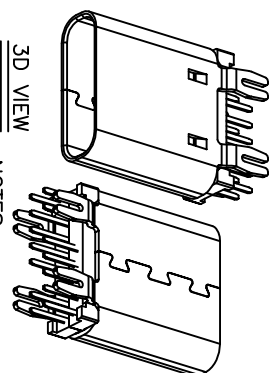
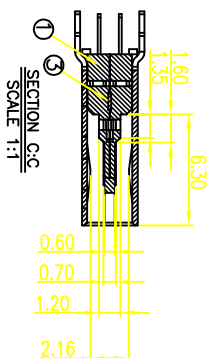


1 2 3 4 5 6 7 8 9 10

Rohs 客户图

目錄 MAPX	變更內容 MODIFICATION	日期 DATE
40	NEW	09-10-20



NOTES:

1. ELECTRICAL REQUIREMENTS:
 - 1.1: CURRENT RATING:3.0A MAX
 - 1.2: VOLTAGE RATING:30VAC.
 - 1.3: CONTACT RESISTANCE: 40 mΩ MAX.
AFTER DURABILITY: 50 mΩ MAX.
 - 1.4: INSULATION RESISTANCE: 100 MΩ MIN.
1.5.WITHSTANDING STRENGTH: 100V AC
FOR 1 MINUTE .

2. MECHANICAL REQUIREMENTS:

- 2.1: INSERTION FORCE : 5N~20N
- 2.2: EXTRACTION FORCE: INITIAL: 8~20N
AFTER DURABILITY:6~20N



3.ENVIRONMENTAL REQUIREMENTS:

- 3.1: OPERATING TEMPERATURE RANGE: -40℃~+80℃
- 3.2: STORAGE TEMPERATURE RANGE: -40℃~+80℃




4. MATERIAL: SEE TABLE 1

5. PLATING: SEE TABLE 1

6.SOLDER ABILITY:260℃±5℃,5±0.5SECONDS



PIN	SIGNAL NAME	PIN	SIGNAL NAME
A1	GND	B12	GND
/	/	/	/
/	/	/	/
A4	VBUS	B9	VBUS
A5	CC1	B8	SUB2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SUB1	B5	CC2
A9	VBUS	B4	VBUS
/	/	/	/
/	/	/	/
A12	GND	B1	GND



Recommend PCB Layout (Jack Top View)
Tolerance:±0.05mm
Recommend PCB Thickness: 1.2mm

产品图

PRODUCT CHART DWG

公差一览表

TOLERANCE UNLESS OTHERWISE SPECIFIED	单位 UNITS	MM	比例 SCALE	日期 DATE	核准 Appd	雷永健	产品料号 PRODUCT PART NO	24006-UCAR002-X
X	±0.30	X"	±5°	比例 SCALE	日期 DATE	核准 Appd	产品料号 PRODUCT PART NO	24006-UCAR002-X
X	±0.25	X"	±2°	比例 SCALE	日期 DATE	核准 Appd	产品料号 PRODUCT PART NO	24006-UCAR002-X
.XX	±0.30	.XX"	±1°	比例 SCALE	日期 DATE	核准 Appd	产品料号 PRODUCT PART NO	24006-UCAR002-X
.XXX	±0.15	.XXX"	±0.5°	比例 SCALE	日期 DATE	核准 Appd	产品料号 PRODUCT PART NO	24006-UCAR002-X

深圳市鑫风雷电子有限公司

Shenzhen xinfenglei Electronic Co., Ltd

制图

王冠

产品料号

24006-UCAR002-X

审核

雷永健

产品名称

TYPE C 14P 180度插板H=10.0无弹

核准

雷永健

角法

角法

版本

40