
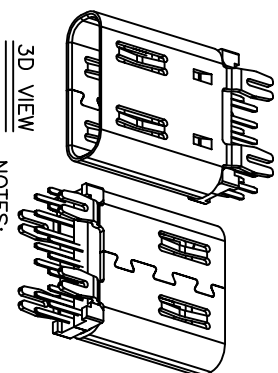
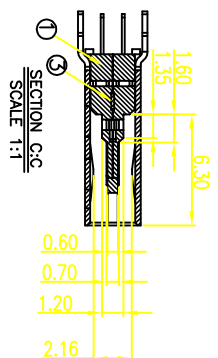


1 2 3 4 5 6 7 8 9 10

Rohs 客户图

目錄 MAPX	變更內容 MODIFICATION	日期 DATE
40	NEW	09-10-20



NOTES:
1. ELECTRICAL REQUIREMENTS:

- 1.1: CURRENT RATING:3.0A MAX
- 1.2: VOLTAGE RATING:30VAC.
- 1.3: CONTACT RESISTANCE: 40 mΩ MAX.
AFTER DURABILITY: 50 mΩ MAX.
- 1.4: INSULATION RESISTANCE: 100 MΩ MIN.
1.5:WITHSTANDING STRENGTH: 100V AC
FOR 1 MINUTE .

2. MECHANICAL REQUIREMENTS:

- 2.1: INSERTION FORCE : 5N~20N
- 2.2: EXTRACTION FORCE: INITIAL: 8~20N
AFTER DURABILITY:6~20N

3.ENVIRONMENTAL REQUIREMENTS:




- 3.1: OPERATING TEMPERATURE RANGE: -40℃~+80℃
- 3.2: STORAGE TEMPERATURE RANGE: -40℃~+80℃

4. MATERIAL: SEE TABLE 1

5. PLATING: SEE TABLE 1

6.SOLDER ABILITY:260℃±5℃,5±0.5SECONDS

PIN	SIGNAL NAME	PIN	SIGNAL NAME
A1	GND	B12	GND
/	/	/	/
/	/	/	/
A4	VBUS	B9	VBUS
A5	CC1	B8	SUB2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SUB1	B5	CC2
A9	VBUS	B4	VBUS
/	/	/	/
/	/	/	/
A12	GND	B1	GND

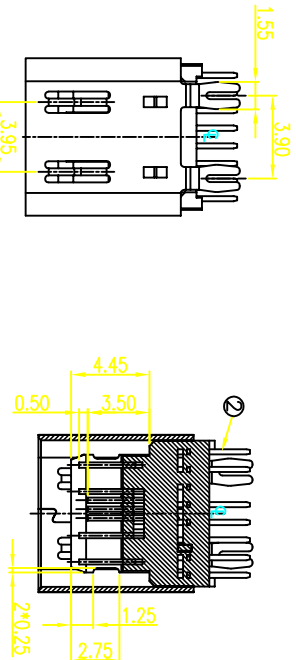

Recommend PCB Layout (Jack Top View)
Tolerance:±0.05mm
Recommend PCB Thickness: 1.2mm

NO.	DESCRIPTION	MATERIAL	COLOR/PLATING	QTY
1	IM 1	LCP UL94V-0	SEE TABLE 2	1 PCS
2	CONTACT	C5210 T=0.25 mm	CONTACT Au:1u" WELDING Au:1u"/Ni:80u" Min	2 SET
3	SHIELDING PLATE	SUS 304 T=0.20 mm	SEE TABLE 2	1 PCS
4	IM 2	LCP UL94V-0	SEE TABLE 2	1 PCS
5	SHELL	SUS 304 T=0.30 mm	Ni:80u"~120u"	1 PCS

产品图				深圳市鑫风雷电子有限公司			
PRODUCT CHART DWG				Shenzhen xinfenglei Electronic Co., Ltd			
公差一览表				单位			
TOLERANCE UNLESS OTHERWISE				UNITS			
X				±0.30			
X				±0.25			
XX				±0.30			
XXX				±0.15			
日期				2009/10/20			
DATE				2009/10/20			
制图				王冠			
DRAWING				王冠			
审核				雷永健			
CHECK				雷永健			
批准				雷永健			
APPROD				雷永健			
产品料号				24006-UCAF001-X			
PRODUCT NO.				24006-UCAF001-X			
产品名称				TYPE C 14P 180度插板H=10.0			
PRODUCT NAME				TYPE C 14P 180度插板H=10.0			
角法				版本			
VIEW				VER			
A0				A0			

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO XINFENGLEI ELECTRONIC CO.,LTD.AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION