
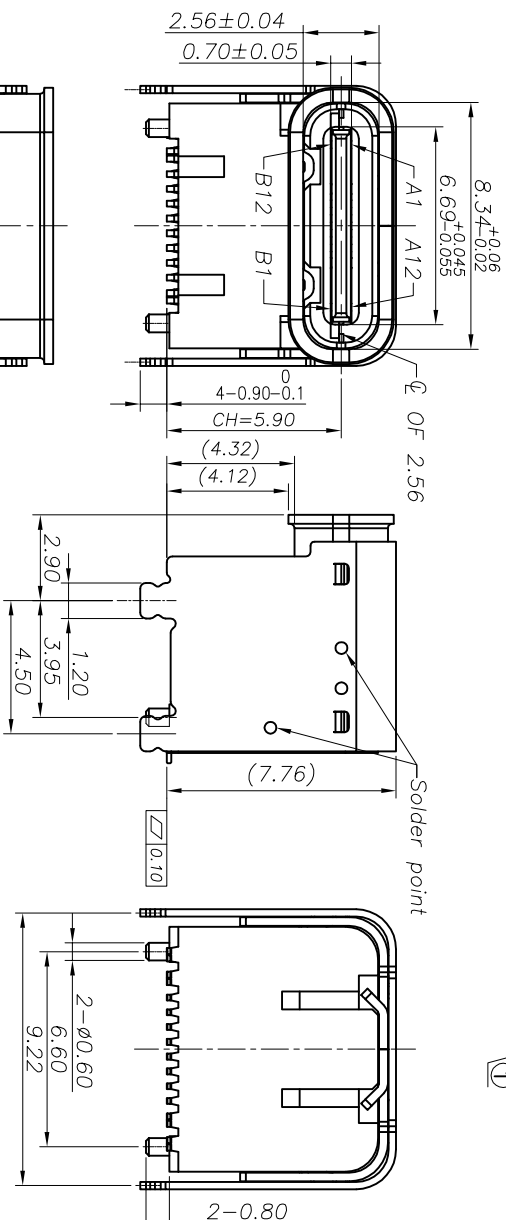
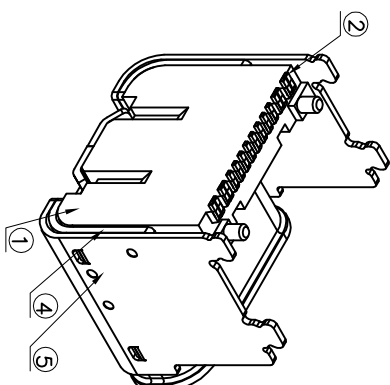
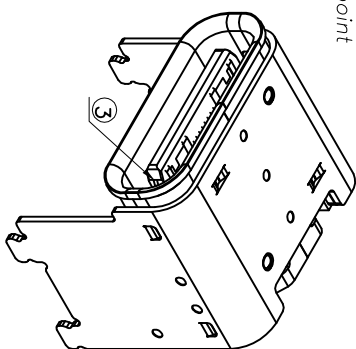


RoHS 客户图

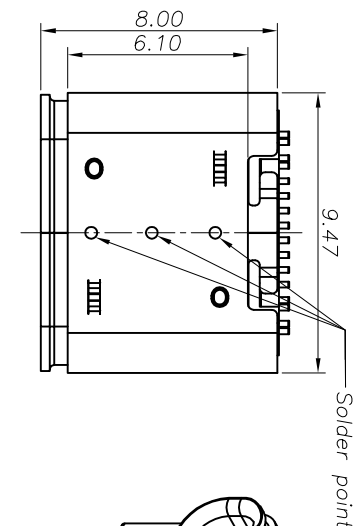

NOTE:

- 1.MATERIAL SPECIFICATION:
 - 1.HOUSING:PA10T,UL94 V-0.
 - 2.CONTACTS:C2680,T=0.15mm
 - 3.MID PLATE: SUS301,T=0.15mm
 - 4.INSIDE SHELL: SUS304,T=0.30mm
 - 5.OUTSIDE SHELL: SUS304,T=0.25mm
- 2.PLATING SPECIFICATION:
 - 2-1.CONTACTS:
Ni 50u" MIN. UNDER PLATED OVER ALL.
Au PLATED ON THE FUNCTIONAL AREA OF CONTACT.
(GOLD PLATING THICKNESS FOLLOW THE P/N)
GOLD FLASH PLATING ON SOLDER AREA
 - 2-2.INSIDE SHELL OR OUTSIDE SHELL:
Ni 30u" MIN. UNDER PLATED OVER ALL.
- 3.MECHANICAL PERFORMANCE,
 - 3-1.INSERTION FORCE: 0.5~2.0kgf.
 - 3-2.REMOVAL FORCE: 0.8kgf~2.0kgf.
 - 3-3.DURABILITY: 10000 CYCLES.
- 4.ELECTRICAL PERFORMANCE,
 - 4-1. CURRENT RATING:5A
VOLTAGE RATING:5V
 - 4-2.INSULATION RESISTANCE: 100MΩ MIN
 - 4-3.DIELECTRIC WITHSTAND VOLTAGE,AC 100V FOR 1 MINUTE.
5. ENVIRONMENTAL PERFORMANCE:
 - OPERATING TEMPERATURE: -30℃~+80℃.
 - 6.IR REFLOW:
THE PEAK TEMPERATURE ON THE BOARD SHALL BE MAINTAINED FOR 10 SECONDS AT 260℃.

产品图

PRODUCT CHART DWG

深圳市鑫风雷电子有限公司

公差一览表		单位		制图		产品料号	
TOLERANCE UNLESS OTHERWISE		UNITS		DRAWING		PRODUCT PART NO.	
X	±0.30	X'	±5°	王冠	00206-UCAP007-X		
X	±0.25	X'	±2°	雷永健	产品名称		
XX	±0.30	XX'	±1°	审核	PRODUCT NO.		
XXX	±0.15	XXX'	±0.5°	日期	角法		
		DATE		2009/10/20	核准		
				APPD	雷永健		
					VER		


12345678910

Rohs 客户图


目錄 MAPX	變更內容 MODIFICATION	日期 DATE
A0	NEW	09-10-20

USB TYPE-C PIN ASSIGNMENTS

PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	Dp1	B7	Dn2
A7	Dn1	B6	Dp2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND


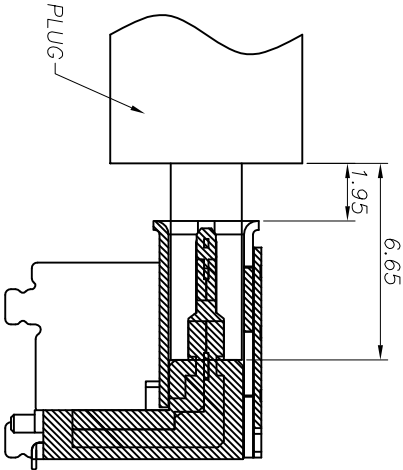


AFTER MATING
SCALE 1:1

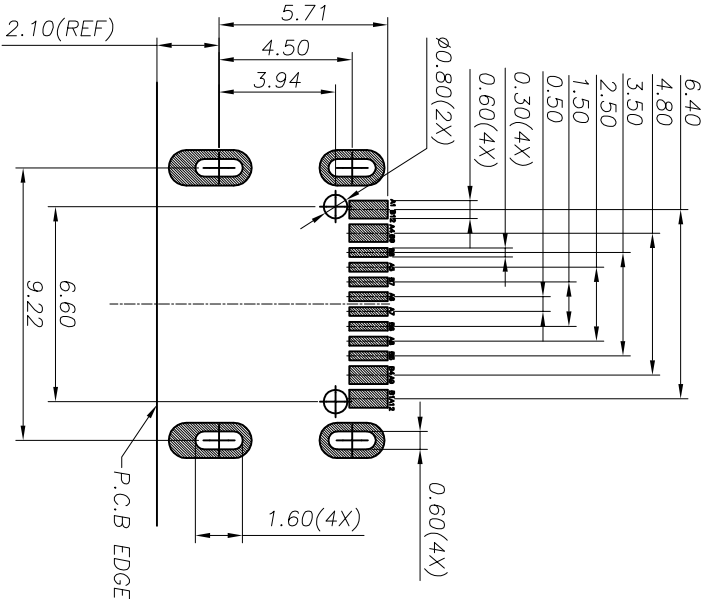


RECOMMEND P.C.B LAYOUT(COMPONENT SIDE)
TOLERANCE FOR PCB LAYOUT IS ± 0.05

产品图 PRODUCT CHART DWG				深圳市鑫风雷电子有限公司			
公差一览表 TOLERANCE UNLESS OTHERWISE				单位 UNITS	制图 DRAWING	王冠 CORONA	产品料号 PRODUCT PART NO.
X	±0.30	X'	±5°	比例 SCALE	1:1	审核 CHKD	雷永健 LEI YONGJIAN
.X	±0.25	.X'	±2°	日期 DATE	2009/10/20	批准 APPD	雷永健 LEI YONGJIAN
.XX	±0.30	.XX'	±1°				
.XXX	±0.15	.XXX'	±0.5°				
				角法 VIEW	⊕	版本 VER	A0

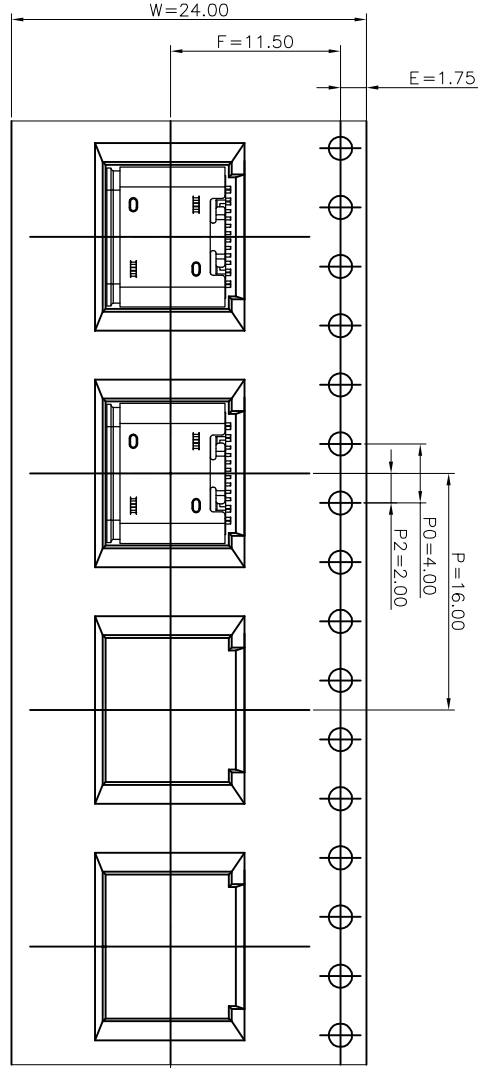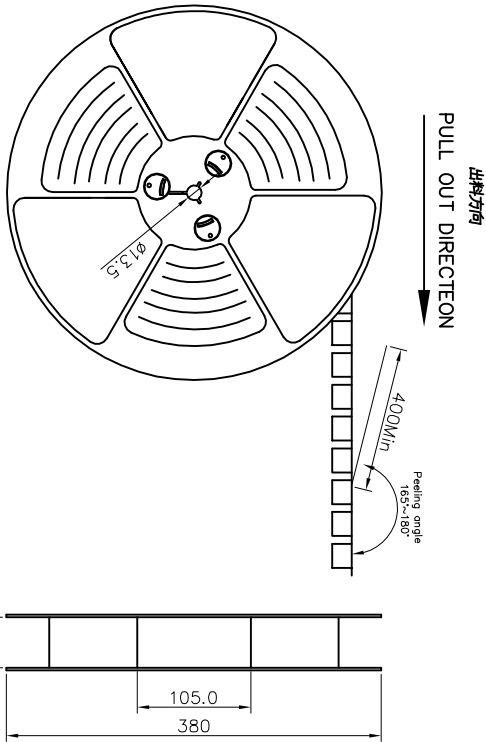

NOTES

1.帶子引導長度
LEAD TAPE LENGTH
出料方向
PULL OUT DIRECTION
PULL OUT DIRECTION

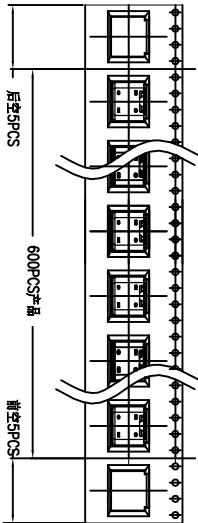

2.上帶 製力力為: 0.1~1.3N(10.2gf~130gf)
PEELING OFF FORCE OF TOP TAPE:0.1~1.3N(10.2gf~130gf)
出貨運輸過程中一定注意:
THIS REQUIREMENT SHOULD BE APPLIED AT SHIPMENT:
卷帶在運輸過程中不能散開
PEELING OFF SHOULD NOT BE ALLOWED DURING TRANSPORTATION

包裝明細表 (The detail of the packing) Carton

產品料号	包裝數量 (Packing Capacity)	重量 Weight (Kg)
(Product No.)	pcs/box boxes/Carton	Pcs/Box N.W./Pcs N.W./Box G.W./Box
00206-UCAR007-X	600 7	4200 ----- ----- -----

產品圖

PRODUCT CHART DWG

深圳市鑫风雷电子有限公司

公差一览表 TOLERANCE UNLESS OTHERWISE				單位 UNITS	MM	制圖 DRAWING	王冠 王冠	產品料号 PRODUCT PART NO.	00206-UCAR007-X
X	±0.30	X'	±5°	比例 SCALE	1:1	審核 CHKD	雷永健	產品名称 PRODUCT NO.	TYPE C 16P板上墊高4.3 CH=5.9
.XX	±0.30	.XX'	±1°	日期 DATE	2009/10/20	核准 APPRD	雷永健	角法 VIEW	版本 VER
.XXX	±0.15	.XXX'	±0.5°						A0

