


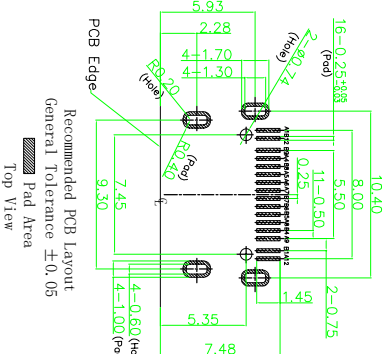


日期 DATE	09-10-20
------------	----------



6. Operating Temperature: -30°C TO $+85^{\circ}\text{C}$



PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
A1	GND	B12	GND
A2	TX ₊	B1	RX ₊
A3	TX ₋	B2	RX ₋
A4	VREF	B9	VREF
A5	CC1	B8	SRQ2
A6	D ₊	B7	D ₋
A7	D ₋	B6	D ₊
A8	SRQ1	B5	CC2
A9	VREF	B4	VREF
A10	TX ₊	B3	TX ₊
A11	TX ₋	B11	TX ₋
A12	GND	B1	GND

产品图 PRODUCT CHART DWG		深圳市鑫风雷电子有限公司									
公差一览表				单位		制图		产品料号		00603-UCAF003-X	
TOLERANCE UNLESS OTHERWISE				UNITS		DRAWING		PRODUCT PART NO.			
X.	±0.30	X.	±5°	MM		审核		产品名称		TYPE C 16P母座加防护套 H=3.18	
.X	±0.25	.X	±2°	1:1		CHKD		PRODUCT NO.			
.XX	±0.30	.XX	±1°					角度		版本	
.XXX	±0.15	.XXX	±0.5°					VIEW		VER	
日期				2009/10/20		核准		雷永健		A0	
DATE						APPD					