
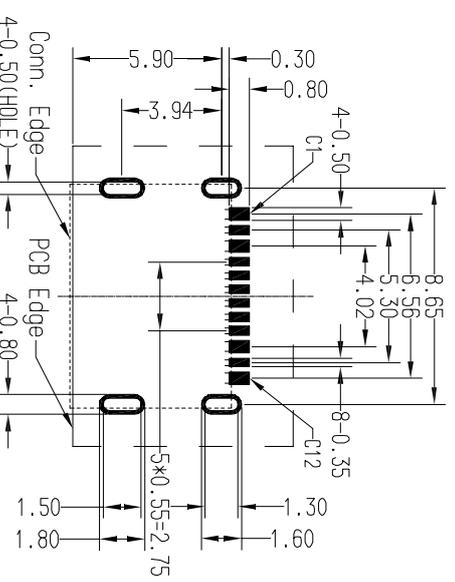


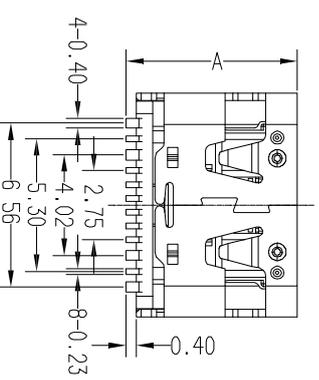
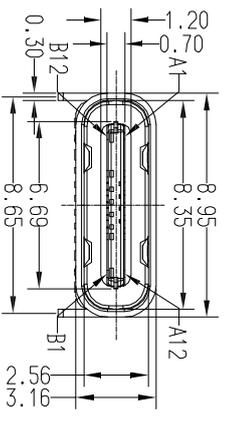



ROHS 客户图

MAPX	MODIFICATION	DATE
A0	NEW	09-10-20



RECOMMENDED P.C.B LAYOUT (COMPONENT SIDE)
 PCB THICKNESS: 0.80±0.05mm
 DEFAULT TOLERANCE: ±0.05mm

Dim A	Dim B
6.50	4.40
6.80	4.70
8.30	6.20




INTERFACE(FRONT VIEW)

A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12
GND	/	/	Vbus	CC1	D+	D-	SBU1	Vbus	/	/	GND
GND	/	/	Vbus	SBU2	D-	D+	CC2	Vbus	/	/	GND
B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1

PIN ASSIGNMENT:

Pin No.	A1&B12	A5	A4&B9	A6	B8	B7	B6	B5	A7	A9&B4	A8	A12&B1
Signal Name	GND	CC1	Vbus	D+	SBU2	D-	D+	CC2	D-	Vbus	SBU1	GND
PCB PAD No.	C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12

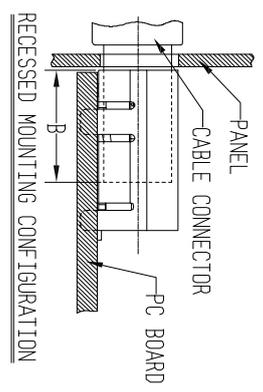

产品图

公差一览表
 PRODUCT CHART DIMS
 TOLERANCE UNLESS OTHERWISE SPECIFIED

③ CONTACT	12	COPPER ALLOY	MOLDED COLOR: BLACK.
② PLASTIC	1	THERMOPLASTIC UL 94V-0	TAB WITH LEAD FREE TIN ALLOY.
① SHELL	1	STAINLESS STEEL	TREATMENT
NO. DESCRIPTION	QTY	MATERIAL	

深圳市鑫风雷电子有限公司

单位	MM	制图	王冠	产品料号	11009-UCAF001-X
比例	1:1	审核	雷永健	产品名称	TYPE C母座板上单排12P
日期	2009/10/20	核准	雷永健	产品图角法	TYPE C母座板上单排12P
SCALE		APPD		版本	A0
DATE		VIEW			