

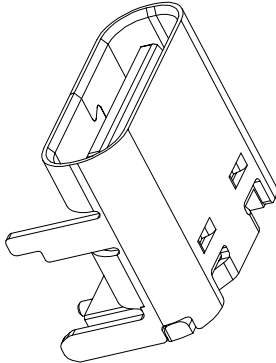

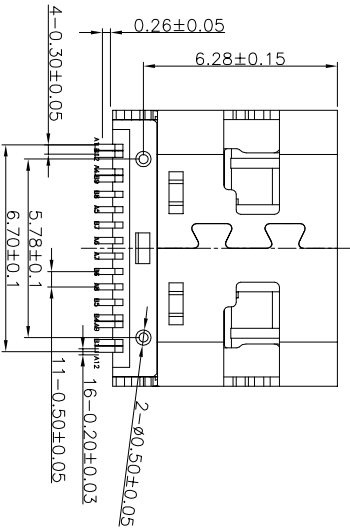
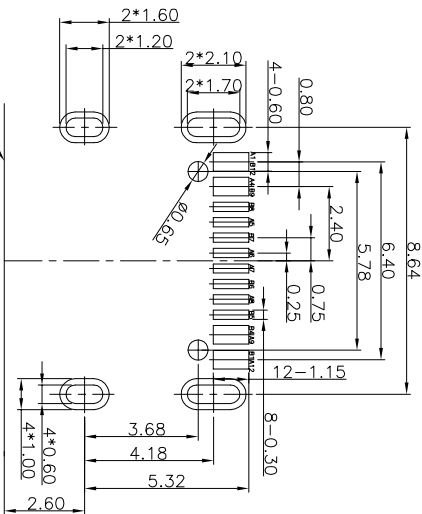


RoHS 客户图

目錄 MAPX	變更內容 MODIFICATION	日期 DATE
A0	NEW	09-10-20

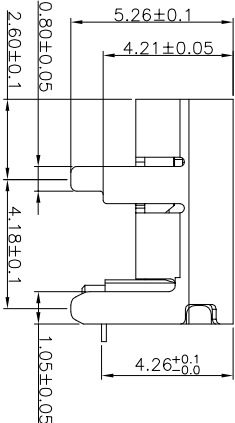

- NOTES:
SPECIFICATION:
- CURRENT RATING: 5A MAX
 - VOLTAGE: 100 VAC
 - TEMPERATURE RANGE: -30 °C ~ 85 °C
 - CONTACT RESISTANCE: 40 MILLIONHM MAX
 - INSULATION RESISTANCE: 100 MEGOHMS MIN.
 - INSERTION FORCE : 5N~20N
 - UNMATING FORCE: 8N~20N
 - DURABILITY: 10,000 CYCLES

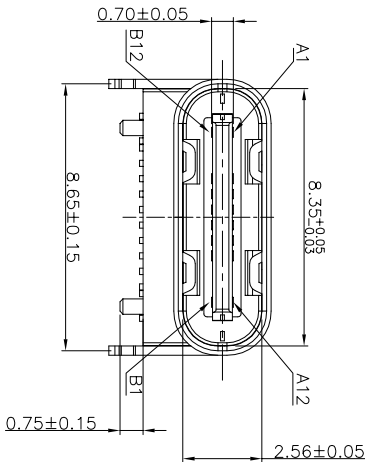

A1	GND	B12	GND	6	SHELL	STAINLESS STEEL	N/SN Plated	1PCS
A4	VBUS	B9	VBUS	5	SHIELDING PLATE	STAINLESS STEEL	----	1PCS
A5	CCI	B8	SBU2	4	MD	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
A6	DP1	B7	DN2	3	CONTACT	COPPER ALLOY	Au/Ni Plated	1SET
A7	DN1	B6	DP2	2	CONTACT	COPPER ALLOY	Au/Ni Plated	1SET
A8	SBU1	B5	CC2	1	HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
A9	VBUS	B4	VBUS					
A12	GND	B1	GND					
PIN	SIGNAL NAME	PIN	SIGNAL NAME	NO.	DESCRIPTION	MATERIAL	REMARKS	QTY



产品图

深圳市鑫风雷电子有限公司
Shenzhen xinfenglei Electronic Co., Ltd

公差一览表 TOLERANCE UNLESS OTHERWISE				单位 UNITS			
X	±0.30	X'	±5°	MM	制图	王冠	产品料号 19012-UCAF009-X
X	±0.25	X'	±2°	比例 SCALE	审核	雷永健	产品名称 TYPE C 16P母座加高1.0 H=4.25
.XX	±0.30	.XX'	±1°	日期 DATE	核准	雷永健	角法 VIEW
.XXX	±0.15	.XXX'	±0.5°	2009/10/20	APPD		版本 VER
							A0

RoHS 客户图

目錄 MAPX	變更內容 MODIFICATION	日期 DATE
A0	NEW	09-10-20

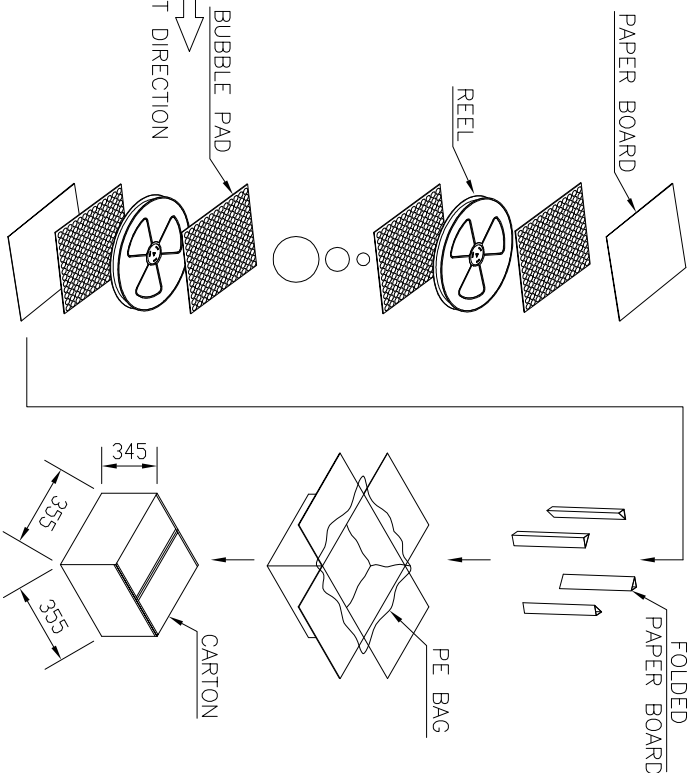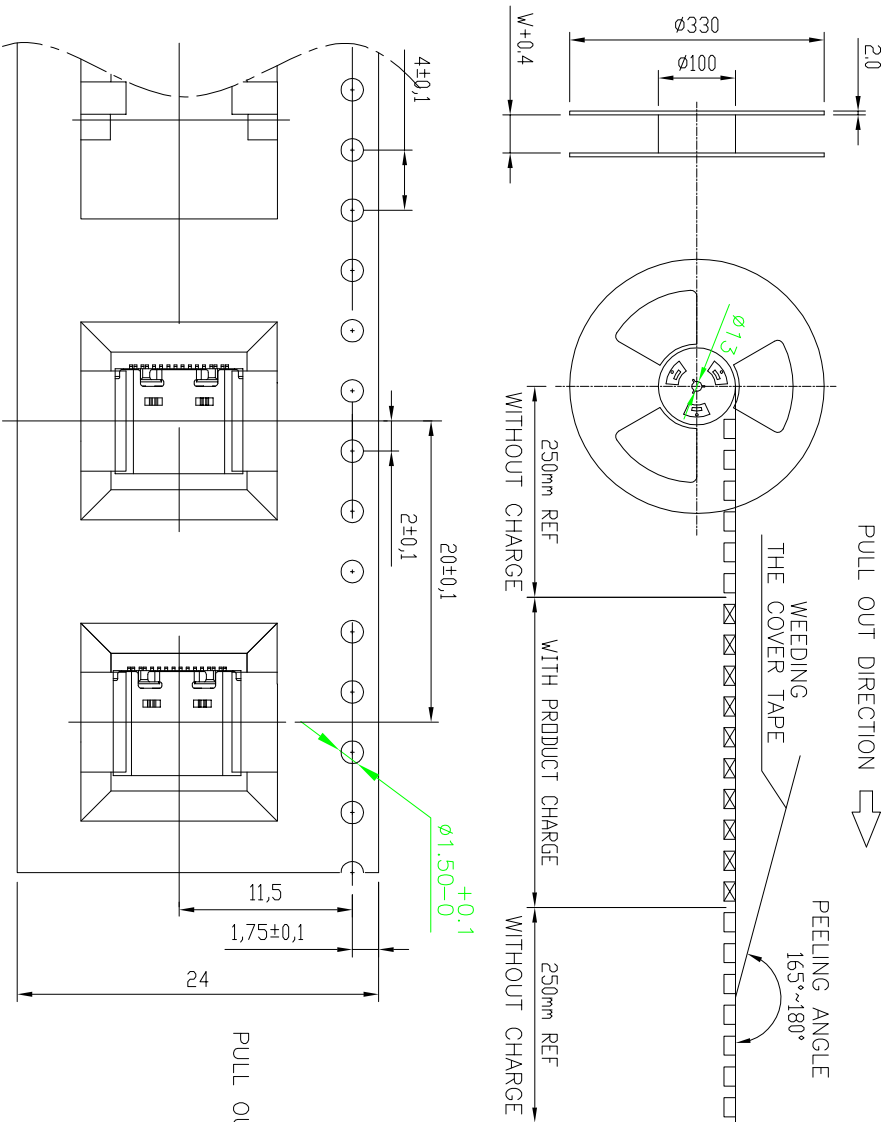

NOTE:
1. QUANTITY: 700 PCS/REEL, 7000PCS/CARTON.

产品图

PRODUCT CHART DWG

深圳市鑫风雷电子有限公司
Shenzhen xinfenglei Electronic Co., Ltd

公差一览表 TOLERANCE UNLESS OTHERWISE			单位 UNITS	制图 DRAWING	产品料号 PRODUCT PART NO.
X	±0.30	X'	±5°	王冠	19012-UCAP009-X
X	±0.25	X'	±2°	审核 CHKD	雷永健
.XX	±0.30	.XX'	±1°	产品名称 PRODUCT NO.	TYPE C 16P母座加高1.0 H=4.25
.XXX	±0.15	.XXX'	±0.5°	角法 VIEW	版本 VER
日期 DATE			2009/10/20	核准 APPD	A0