
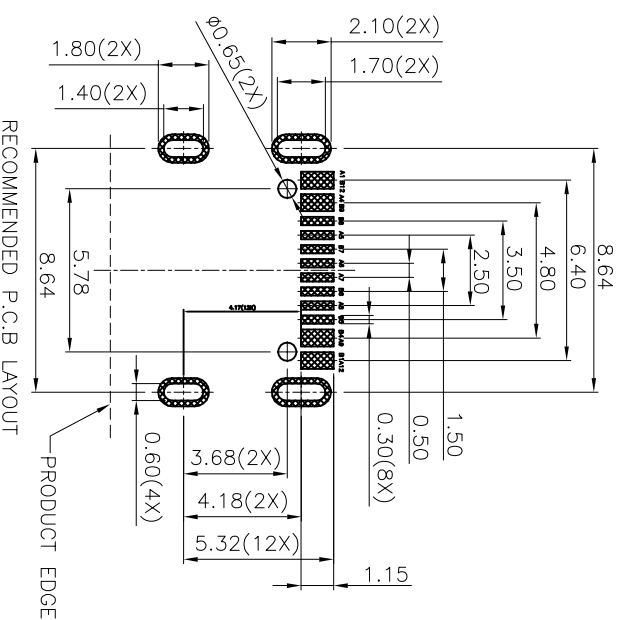
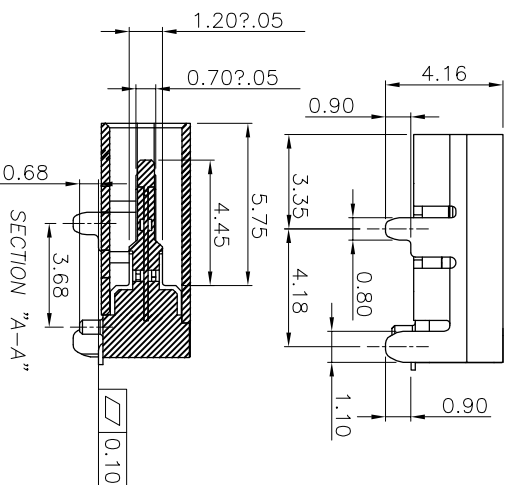
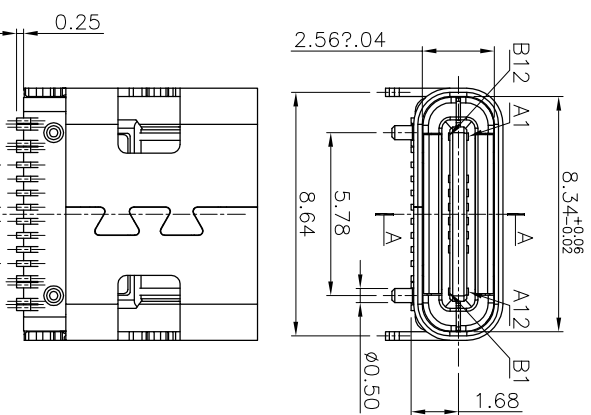



Rohs 客戶圖

7	8	9	10
目録 MAPX	設定内容 MODIFICATION	日期 DATE	
A0	NEW	09-10-20	

NOTE:

1. MATERIAL:
 - 1.1 INSULATOR: HIGH TEMPERATURE PLASTIC UL 94 V-0;
 - 1.2 CONTACT: COPPER ALLOY
 - 1.3 SHELL: STAINLESS STEEL
2. ELECTRICAL CHARACTERISTICS:
 - 2.1 CONTACT RESISTANCE: 40mΩ Max FOR INITIAL, 30mΩ CHANGE AFTER TEST, MEASURE AT 20mv, 100ma.
 - 2.2 CONTACT CURRENT RATING: 5A FOR VBUS PIN; 1.25A FOR VCONN PIN.
 - 2.3 DIELECTRIC WITHSTANDING VOLTAGE: 100V AC R.M.S.
 - 2.4 INSULATION RESISTANCE: 100MΩ Min
 - 2.5 OPERATING TEMPERATURE: -40°C ~ 85°C
3. MECHANICAL CHARACTERISTICS:
 - 3.1 MATING FORCE: 5~20 N.
 - 3.2 UNMATED FORCE: 8~20N AFTER TEST
 - 3.3 DURABILITY: 10,000 CYCLES
4. PLATING
 - 4.1 TERMINAL CONTACT: (SEE TAB) GOLD PLATING ALL OVER 50u" Min NICKEL AND 80u" Min Tin ALL OVER 50u" Min NICKEL ON SOLDER AREA
 - 4.2 SHELL: 50u" Min. NICKEL ALL OVER,

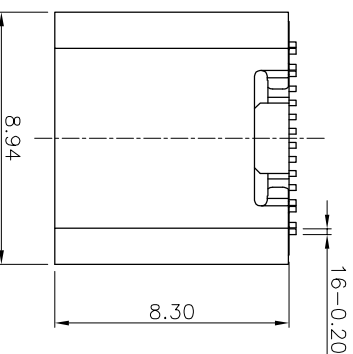

PIN	SIGNAL NAME	PIN	SIGNAL NAME
A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SB02
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SB01	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND

产 品 图				深圳市鑫风雷电子有限公司							
PRODUCT CHART DWG											
公差一览表											
TOLERANCE UNLESS OTHERWISE											
X.	±0.30	X.	±5°	单位	MM	制图	王冠	产品料号	20009-UCAIT001-X		
X	±0.25	X°	±2°	比例	1:1	审核	雷永健	PRODUCT NAME	TYPE C 16P 母座板上 L-8-30		
XX	±0.15	XX°	±1°	日期		核准	雷永健	PRODUCT NO.			
XXX	±0.10	XXX°	±0.5°	DATE	2009/10/20	核准	雷永健	VIEW	版本	A0	
								角法			
								Appd			
											

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO XINFENGLEI ELECTRONIC CO.,LTD.AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION