

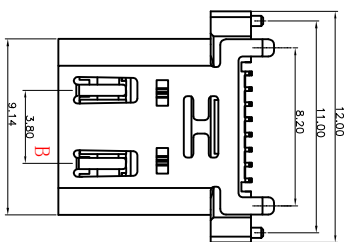


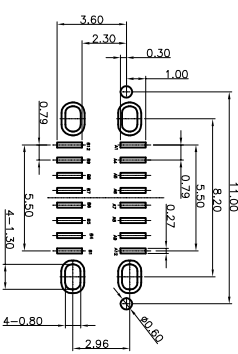
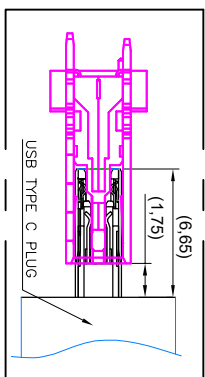




Rohs 客戶圖

7	8	9	10
目録 MAPX	設定内容 MODIFICATION	日期 DATE	
A0	NEW	09-10-20	



NOTE 2

1. MATERIAL:
 - 1.1 INSULATOR: HIGH TEMPERATURE PLASTIC UL 94 V-0; Black Color
 - 1.2 CONTACT: C7025 (T=0, 12mm)
 - 1.3 SHELL: STAINLESS STEEL (T=0, 30mm)
 - 1.4 INNER GROUND COVER SHELL: STAINLESS STEEL (T=0, 10mm)
 - 1.5 MID PLATE: STAINLESS STEEL (T=0, 15mm)
2. ELECTRICAL CHARACTERISTICS:
 - 2.1 CONTACT RESISTANCE: $40m\Omega$ Max FOR INITIAL, $10m\Omega$ CHANGE AFTER TEST, MEASURE AT $20mV$, $100mA$.
 - 2.2 CONTACT CURRENT RATING: 5A FOR COLLECTIVELY POWER SUPPLY PIN(P1M1, A4, A9, A12, B1, B4, B9, B12); 1.25A FOR WCONN PIN; 0.25A FOR OTHER SIGNAL PIN.
 - 2.3 DIELECTRIC WITHSTANDING VOLTAGE: 100V AC R. M. S.
 - 2.4 INSULATION RESISTANCE: $100M\Omega$ Min
 - 2.5 OPERATING TEMPERATURE: $-40^{\circ}C \sim 85^{\circ}C$
3. MECHANICAL CHARACTERISTICS:
 - 3.1 MATING FORCE: 5~20 N.
 - 3.2 UNMATED FORCE: 8~20N INITIAL TEST; 6~20N DURABILITY AFTER TEST
 - 3.3 DURABILITY: 10, 000 CYCLES
4. PLATING:
 - 4.1 TERMINAL CONTACT: Au 3μ PLATING ON CONTACT AREA; TIN 50μ Min TIN; ON SOLDER TAIL, NI 50μ Min UNDERPLATING OVERALL
 - 4.2 SHELL: 50μ Min. NICKEL ALL OVER,
 - 4.3 MID PLATE: CLEAN

[illegible]

5	CAP	LCP 6007MS UL94V-0	BLACK	1PCS		
4	SHELL	SUS304 T=0.40mm	NI 50U" Min Plated	1PCS		
3	LATCH	SUS304 -H T=0.15mm	NO PLATED	1PCS	49H	Reel
2	CONTACT	CT025 T=0.12mm	PL 50U" FINISH ON CONTACT AREA, NI 50U" MIN THING ON SQUARE IN PL 50U" MIN UNDERPLATE OVERALL	1SET		
1	HOUSING	LCP UL94V-0	LCP BLACK UL94V-0	1PCS		
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY	批号	PACKAGING

产品图		深圳市鑫风雷电子有限公司			
PRODUCT CHART DWG		Shenzhen xinfenglei Electronics Co., Ltd			
公差一览表		单位	MM	制图	王冠
TOLERANCE UNLESS OTHERWISE		UNITS		DRAWING	Wangguan
∓0.30	∓0.25	∓0.15	比例	审核	雷永健
∓0.25	∓0.20	∓0.15	SCALE	CHKD	Lei Yongjian
∓0.15	∓0.10	∓0.05	日期	核准	雷永健
			DATE	APPRD	Lei Yongjian
				产品料号	19012-UCAF015-X
				产品名称	Type C 16P 180度立式SMT H=10.0带弹片
				PRODUCT NO.	
				联系方式	mai@box: sale@xfcl.com.cn
				Mailbox/ueib	www.xfcl.com.cn