









# RoHS 客户图

NOTE:  
1. Δ MATERIAL & FINISH SEE TABLE;  
2. RATINGS  
2-1 CURRENT RATING: 3A,  
2-1 VOLTAGE RATING: 5V AC,  
2-3 OPERATING TEMPERATURE: -40° - 85°C  
3. CHARACTERISTIC:  
3-1 CONTACT RESISTANCE: 40mΩ MAX (INITIAL),  
50mΩ MAX (FINAL)  
3-2 INSULATION RESISTANCE: 100MΩ MS MIN @ 500V DC  
3-3 DIELECTRIC WITHSTANDING VOLTAGE: 100V AC / 1 MINUTE  
3-4 MATING FORCE: 5-20N;  
3-5 WITHDRAWAL FORCE: 8-20N (BEFORE 1,000 CYCLES);  
6-20N (AFTER 1,000 CYCLES);  
3-6 DURABILITY: 10,000 CYCLES

### PIN ASSIGNMENT:

A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12
GND			V <sub>BUS</sub>	CC1	D+	D-	SBU1	V <sub>BUS</sub>			GND
			V <sub>BUS</sub>	SBU2	D+	CC2					

B12 B11 B10 B9 B8 B7 B6 B5 B4 B3 B2 B1

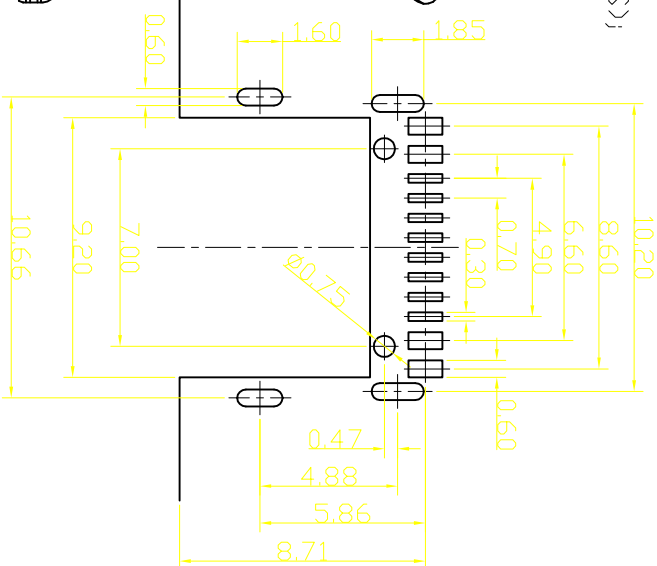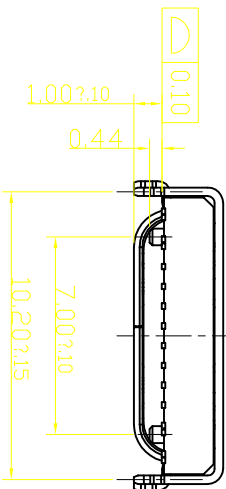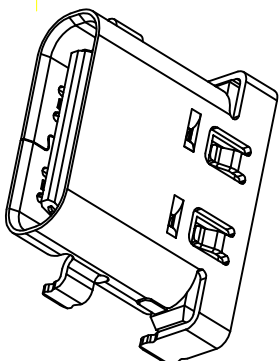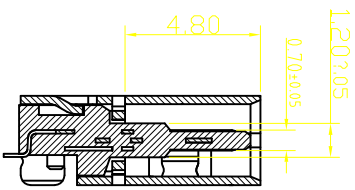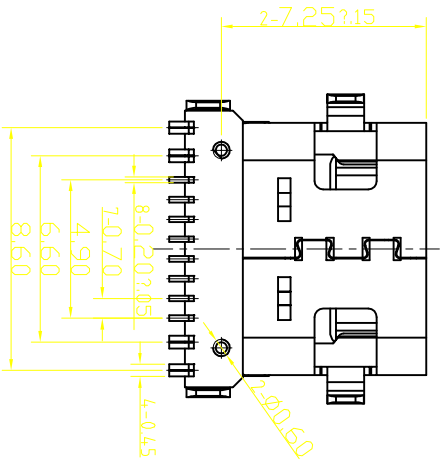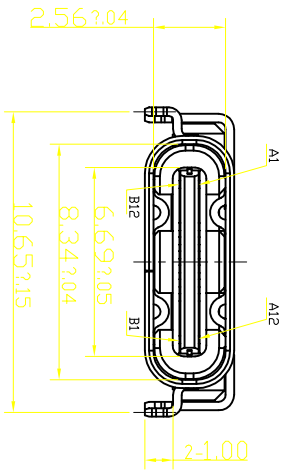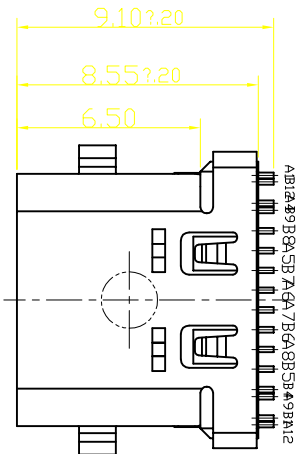

RECOMMENDED PCB LAYOUT  
TOLERANCE: ±0.05

### 产品图

PRODUCT CHART DWG

### 公差一览表

TOLERANCE UNLESS OTHERWISE	UNIT	MM	制图	王冠	产品料号	25020-UCAF004-X
X ±0.30	X'	±5'	比例	1:1	审核	雷永健
XX ±0.25	XX'	±2'	日期	2009/10/20	核准	雷永健
XXX ±0.30	XXX'	±1'	DATE		APPD	
XXX ±0.15	XXX'	±0.5'				

深圳市鑫风雷电子有限公司  
Shenzhen xinfenglei Electronic Co., Ltd

目錄	变更内容	日期
MAPX	MODIFICATION	DATE
A0	NEW	09-10-20