







# RoHS 客户图

PIN NO.	NAME	PIN NO.	NAME
1	GND	6	DN2
2	DP1	7	DP2
3	DN1	8	ACC2
4	ACC1		
5	PWR IN		



RECOMMENDED P.C.B. LAYOUT  
TOLERANCE UNSPECIFIED ±0.05mm

目錄 MAPX	變更內容 MODIFICATION	日期 DATE
40	NEW	09-10-20

## 产品图


## 深圳市鑫风雷电子有限公司

公差一览表 TOLERANCE UNLESS OTHERWISE		单位 UNITS	MM	制图 DRAWING	王冠	产品料号 PRODUCT PART NO.	26003-IP5F003-X
X	±0.30	X	±5°	审核 CHKD	雷永健	产品名称 PRODUCT NAME	苹果母座立式SMT H=6.5
XX	±0.25	X'	±2°	核准 APPD	雷永健	角法 VIEW	版本 VER
XXX	±0.30	XX'	±1°	日期 DATE			40
	±0.15	XXX'	±0.5°				

- 规格:
- 电气特性:  
接触电流额定值:MAX 1.5A。  
额定电压:30V Max。  
介质耐压:AC 500V r. m. s。  
绝缘电阻:最大值:100 MΩ  
接触电阻:最大值50 mΩ
  - 环境:  
工作温度:-25° C ~ + 85° C。  
3所示。机械特点:  
插拔力:最大值15N。  
退出力:最小值3N。  
耐久性Cycleles:5000 Cycleles。

# ROHS 客户图


目錄 MAPX A0	變更內容 MODIFICATION NEW	日期 DATE 09-10-20
------------------	-----------------------------	------------------------

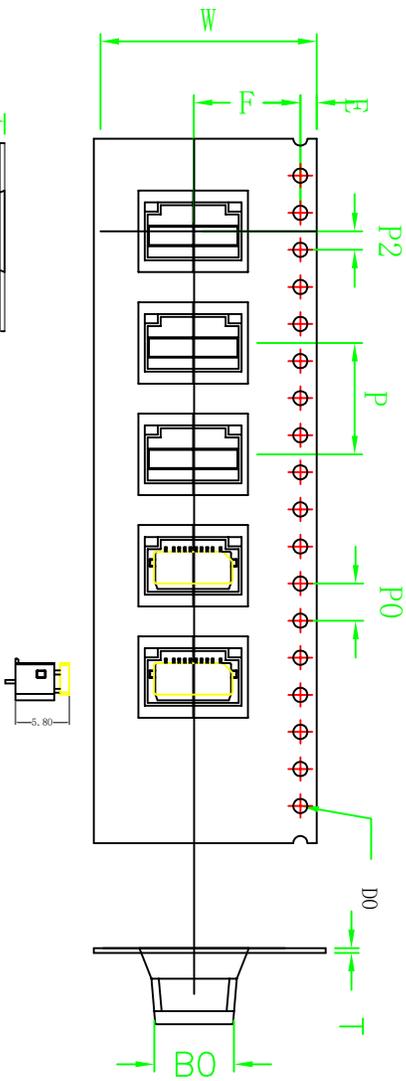

NOTES:  
1. ALL DIMENSIONS MEET EIA-481-B REQUIREMENTS.  
2. MATERIAL: White PS

- CARRIER CAMER NOT TO EXCEED 1mm IN 250mm.
- A0 AND B0 MEASURED ON A PLANE 0.3mm ABOVE THE BOTTOM OF THE POCKET.
- KO MEASURED FROM A PLANE ON THE INSIDE BOTTOM OF THE POCKET TO THE TOP SURFACE OF THE CARRIER.
- QUANTITY: 720PCS(包含空位PCS). (LENGTH: 8.64m)
- THICKNESS:  $0.4 \pm 0.05$ mm.
- REEL: 15"

W	24±0.3
F	11.50±0.1
T	0.4±0.05
E	1.75±0.1
P	12.00±0.1
P0	4±0.1
P2	2±0.1
A0	5.60±0.1
B0	8.6±0.1
K0	8.20±0.1
D0	1.50 <sup>+0.1</sup> <sub>-0</sub>
S0	28.40±0.1

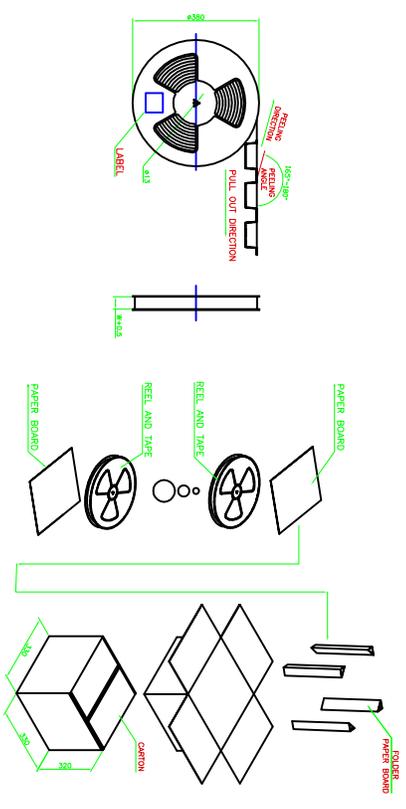

## 产品图

公差一览表 TOLERANCE UNLESS OTHERWISE		单位 UNITS	制图 DRAWING	产品料号 PRODUCT PART NO.
X	±0.30	X'	±5°	26003-1P5F003-X
X	±0.25	X'	±2°	苹果母座立式SMT
XX	±0.30	XX'	±1°	H=6.5
XXX	±0.15	XXX'	±0.5°	
日期 DATE	2009/10/20	核准 APPD	雷永健	版本 VER
				A0

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO XINFENGLEI ELECTRONIC CO.,LTD.AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION