


RoHS 客户图

目錄 MAPX	設定內容 MODIFICATION	日期 DATE
A0	NEW	09-10-20

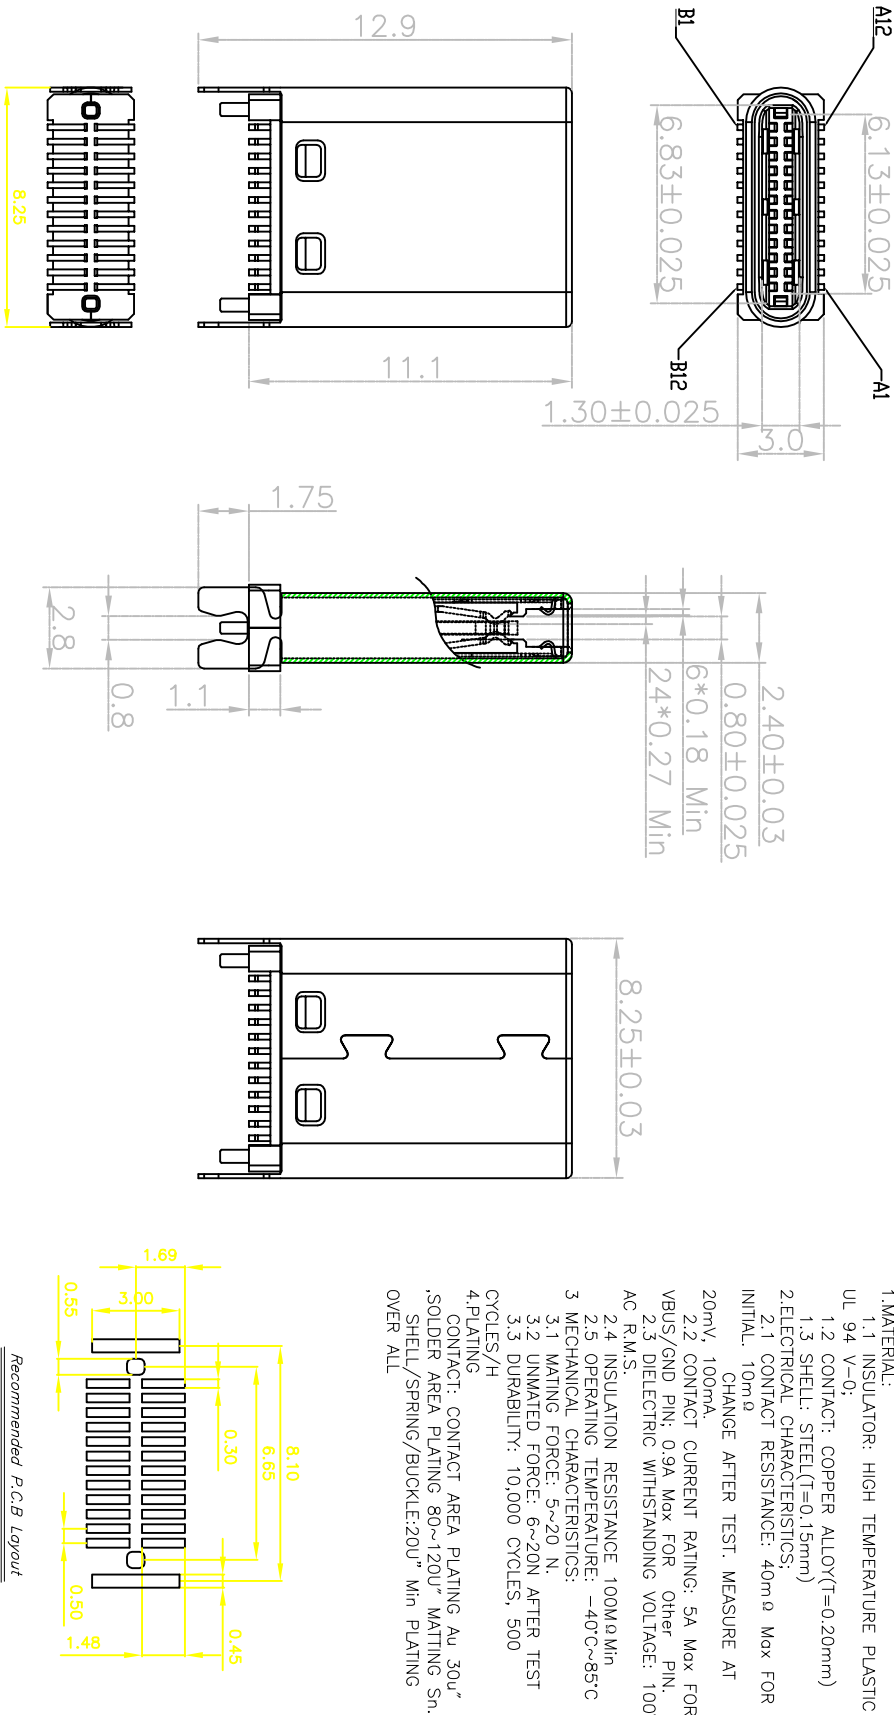

NOTE:

- 1.MATERIAL:
 - 1.1 INSULATOR: HIGH TEMPERATURE PLASTIC
 - UL 94 V-0;
 - 1.2 CONTACT: COPPER ALLOY(T=0.20mm)
 - 1.3 SHELL: STEEL(T=0.15mm)
- 2.ELECTRICAL CHARACTERISTICS:
 - 2.1 CONTACT RESISTANCE: 40mΩ Max FOR INITIAL. 10mΩ
 - CHANGE AFTER TEST. MEASURE AT 20mV, 100mA.
 - 2.2 CONTACT CURRENT RATING: 5A Max FOR VBUS/GND PIN. 0.9A Max for Other PIN.
 - 2.3 DIELECTRIC WITHSTANDING VOLTAGE: 100V AC R.M.S.
 - 2.4 INSULATION RESISTANCE: 100MΩ Min
 - 2.5 OPERATING TEMPERATURE: -40℃~85℃
- 3 MECHANICAL CHARACTERISTICS:
 - 3.1 MATING FORCE: 5~20 N.
 - 3.2 UNMATED FORCE: 6~20N AFTER TEST
 - 3.3 DURABILITY: 10,000 CYCLES, 500 CYCLES/H
- 4.PLATING
CONTACT: CONTACT AREA PLATING Au 30u"
SOLDER AREA PLATING 80~120u" MATTING Sn.
SHELL/SPRING/BUCKLE:20U" Min PLATING OVER ALL

产品图

PRODUCT CHART DWG

深圳市鑫风雷电子有限公司
Shenzhen xinfenglei Electronic Co., Ltd

公差一览表 TOLERANCE UNLESS OTHERWISE				单位 UNITS			
X	±0.30	X'	±5°	比例 SCALE	1:1	制图 DRAWING	王冠
.XX	±0.25	X'	±2°	日期 DATE	2009/10/20	审核 CHKD	雷永健
.XX	±0.30	.XX'	±1°	核准 APPD		雷永健	
.XXX	±0.15	.XXX'	±0.5°	角法 VIEW		版本 VER	A0