


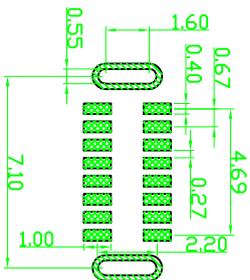
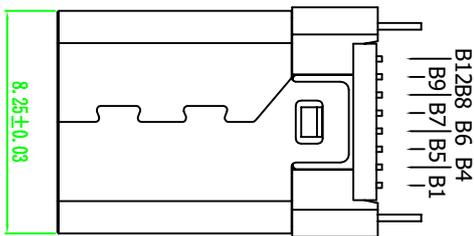


RoHS 客户图

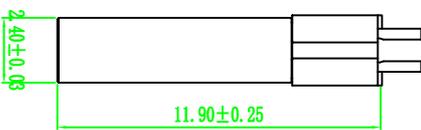

目錄 MAPX	變更內容 MODIFICATION	日期 DATE
A0	NEW	09-10-20

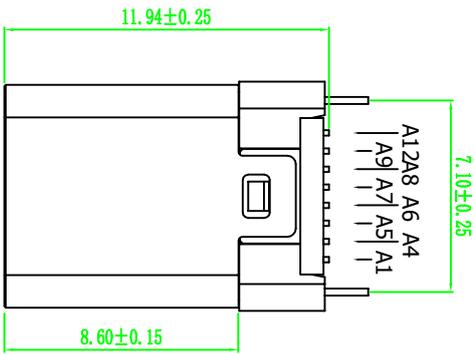

- NOTES:
- MECHANICAL:
 - MATING FORCE: 5-20N .
 - UNMATING FORCE: 8-20N .
 - DURABILITY: 10000 CYCLES MIN.
 - ELECTRICAL:
 - CURRENT: 5.0A MAX
 - VOLTAGE: 20V MAX
 - WITHSTANDING VOLTAGE: 100V AC
 - CONTACT RESISTANCE: 40 mΩ MAX INITIAL;
 - 50 mΩ MAX AFTER 10000 CYCLES
 - 3.ENVIRONMENTAL
 - OPERATING TEMPERATURE RANGE -30°C ~ +80°C

④	GND LATCH	1	STAINLESS STEEL	NICKEL PLATED OVERALL, TAB WITH LEAD FREE TIN ALLOY.
③	CONTACT	16	COPPER ALLOY	NICKEL UNDERPLATING OVER ALL, GOLD PLATING AT CONTACT AREA, LEAD FREE TIN ALLOY AT TERMINATION.
②	SHELL	1	STAINLESS STEEL	CLEAN.
①	HOUSING	2	THERMOPLASTIC UL 94V-0	MOLDED COLOR:BLACK, white
NO.	DESCRIPTION	QTY.	MATERIAL	TREATMENT

产品图

PRODUCT CHART DWG

公差一览表

TOLERANCE UNLESS OTHERWISE SPECIFIED	UNIT	MM	制图	王冠	产品料号
X	±0.30	X	±5°	王冠 <td>00305-UCAM003-X</td>	00305-UCAM003-X
X	±0.25	X	±2°	审核	产品名称
XX	±0.30	XX	±1°	核准	TYPE C 16P公头立式SMT H=11.9
XXX	±0.15	XXX	±0.5°	雷永健	角法
				雷永健	版本
					A0