
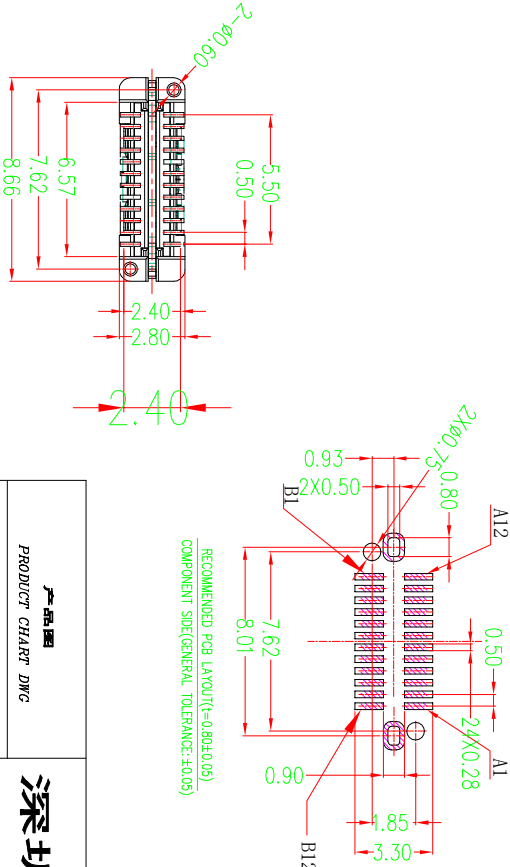
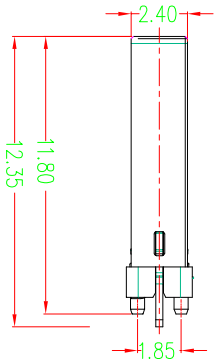
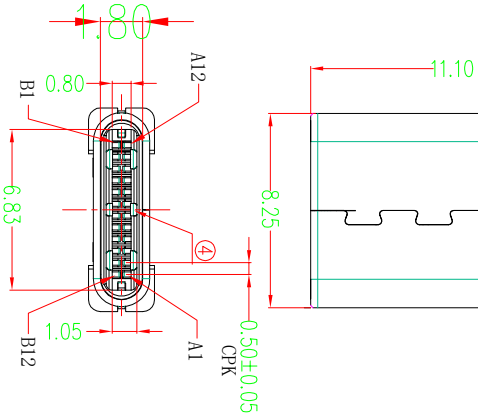


RoHS 客户图

目錄 MAPX	設定內容 MODIFICATION	日期 DATE
A0	NEW	09-10-20

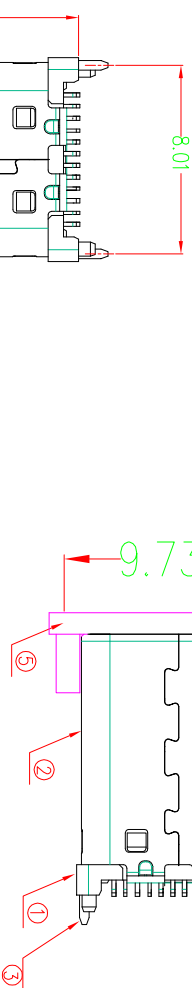

RECOMMENDED PCB LAYOUT(±0.08±0.05)
COMPONENT SIDE(GENERAL TOLERANCE:±0.05)

NOTES:
SPECIFICATION:
1. CURRENT RATING: 3.0A MAX
2. VOLTAGE: 100 VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY: 10,000 CYCLES

A1	GND	B12	GND
A2	SSTXP1	B11	SSRXP1
A3	SSTXN1	B10	SSRXN1
A4	VBUS	B9	VBUS
A5	CC1	B8	SBUS2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10	SSRXN2	B3	SSTXN2
A11	SSRXP2	B2	SSTXP2
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

产品图 PRODUCT CHART DWG				深圳市鑫风雷电子有限公司			
公差—规格 TOLERANCE UNLESS OTHERWISE		单位 UNITS	比例 SCALE	制图 DRAWING	审核 CHECK	王冠 CHAO	产品料号 PRODUCT NO.
X	±0.30	X'	±5°	1:1	1:1	1:1	00721-UCAM002-X
X	±0.25	X'	±2°				
XX	±0.30	XX'	±1°				
XXX	±0.15	XXX'	±0.5°	日期 DATE	2009/10/20	版本 VER	A0