
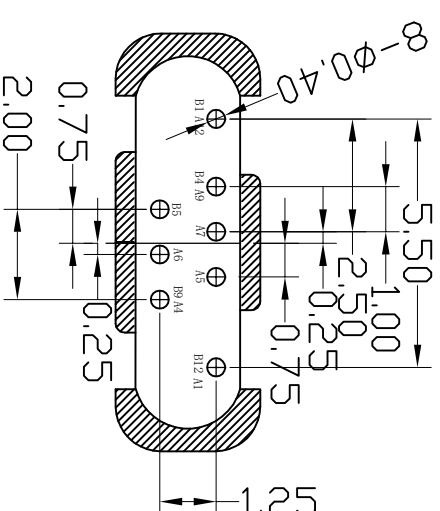





7	8	9	10
目録 MAPX	設定内容 MODIFICATION	日期 DATE	
AO	NEW	09-10-20	

1. Electrical Characteristics:

- Contact Current Rating: 0.5 A
 Dielectric Withstanding Voltage: AC 100V.
 Insulation Resistance: 100 MΩ Min.
 Contact Resistance: 50 mΩ (Max)
 2.Material & Plating:
 Shell: SUS
 Plating: Nickel
 Terminal: Phosphor Bronze T=0.2mm
 Plating: Gold/Tin
 Housing: LCP

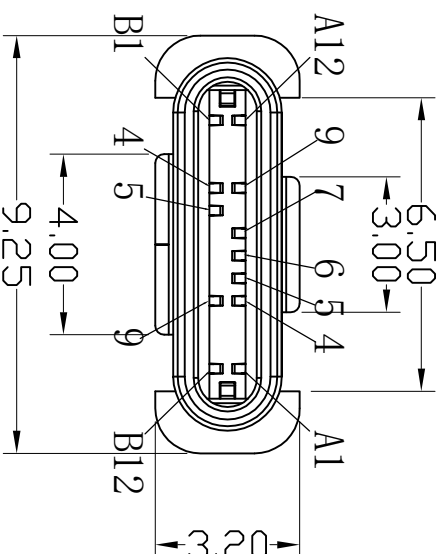

RECOMMENDED PCB LAYOUT

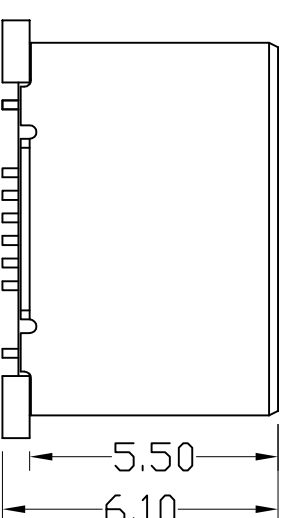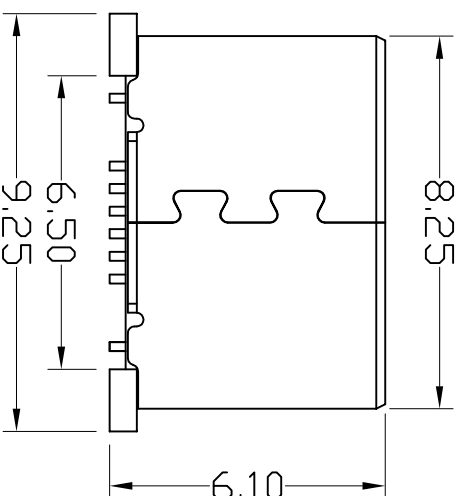

产 品 图				深圳市鑫风雷电子有限公司					
PRODUCT CHART DWG									
公差一览表 TOLERANCE UNLESS OTHERWISE				单位 UNITS	MM	制图 DRAWING	王冠	产品料号 PRODUCT PART NO.	26008-UCAM001-X
X.	±0.30	X.	±5°	比例 SCALE	1:1	审核 CHECK	雷永健	产品名称 PRODUCT NAME	TYPE C 公头简易（背夹专用）
.X	±0.25	.X*	±2°						
.XX	±0.30	.XX*	±1°						
.XXX	±0.15	.XXX*	±0.5°						
DATE	2009/10/20	核准 APPD	雷永健	画法 VIEW		版本 VER	A0		