
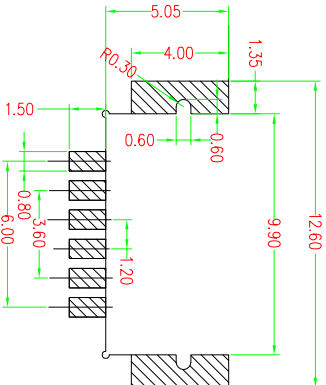






RoHS 客户图

目錄 MAPX	變更內容 MODIFICATION	日期 DATE
A0	NEW	09-10-20

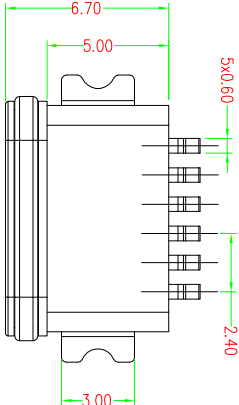

PCB LAYOUT 图仅供参考

TABLE B

A5	CC1	B12	GND
A9	VBUS	B9	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

Note:

1.Material:

1.1 Housing: PA9T

1.2 Contact: C5191,t=0.20mm

1.3 Shell: Krsite

2.ELECTRICAL:

2-1: CURRENT RATING:

VBUS AND GND CONTACTS RATED AT 1.25A

PARALLELED FOR A TOTAL OF 5A;

2-2: INITIAL CONTACT RESISTANCE : 40 MEGOHMS

2-3: DIELECTRIC WITHSTANDING VOLTAGE:

100V AC MIN;

3.MECHANICAL CHARACTERISTICS:

3-1: MATING FORCE: 5~20N

3-2: UNMATING FORCE: 8~20N(INITIAL),

6~20N(AFTER 10000 CYCLES)

3-3: FREQUENCY: 200±50 CYCLES /HOUR,10000 CYCLES

3-4: OPERATING TEMPERATURE ; -40~80°;

4: WATERPROOF: IP-X7.

产品图

PRODUCT CHART DWG

深圳市鑫风雷电子有限公司

公差一览表 TOLERANCE UNLESS OTHERWISE				单位 UNITS	MM	制图 DRAWING	王冠	产品料号 PRODUCT PART NO.	25001-UCAP004-X
X	±0.30	X'	±5°	比例 SCALE	1:1	审核 CHKD	雷永健	产品名称 TYPE	C 6P母座拉伸式沉板0.8 防水
.XX	±0.30	.XX'	±1°	日期 DATE	2009/10/20	核准 APPD	雷永健	角法 VIEW	⊕ □
.XXX	±0.15	.XXX'	±0.5°					版本 VER	A0