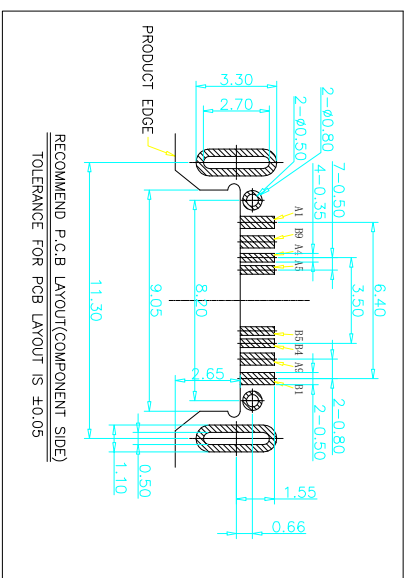





NO	PART	QTY
1	SHELL-1	1 STAINLESS STEEL,Ni PLATED 30u"Min
2	SHELL-2	1 STAINLESS STEEL,Ni PLATED 30u"Min
3	CONTACT	8 COPPER STEEL,Ni 50u"Min,Au u"
4	MID PLATE	1 STAINLESS STEEL,NO PLATING
5	MD HOUSING	1 HIGH TEMPERATURE RESISTANT PLASTIC BLACK UL94 V-0

产品图

PRODUCT CHART DWG

深圳市鑫风雷电子有限公司
Shenzhen xinfenglei Electronics Co., Ltd

公差一覽表			單位 UNITS	MM	制圖 DRAWING	王冠 Wangguan	產品料號 Product Part No.
TOLERANCE UNLESS OTHERWISE SPECIFIED							00101-UCAF019-X
X.	±0.30	X'.	±5°				
.X.	±0.25	.X'	±2°				
.XX	±0.20	.XX'	±1°				
.XXX	±0.15	.XXX'	±0.5°				
日期 DATE			比例 SCALE	1:1	審核 CHKD	雷永健 Lei Yongjian	產品名稱 PRODUCT NO.
2009/10/20					核准 APRD	雷永健 Lei Yongjian	联系方式 Mailto:/web
							mailbox : sale1@xf.com
							www.xf.com.cn

USB TYPE C PIN ASSIGNMENTS			
PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
A1	GND		
A4	VBUS	B9	VBUS
A5	CC1		
		B5	CC2
A9	VBUS	B4	VBUS
		B1	GND

备注 (NOTE):

1. 电气特性:
 - 1.1. 接触区: 接触电阻40mΩ Max, 允许10mA变化量, 测试条件: 20mV, 100mA下测量.
 - 1.2. 接触电流: 3A. VIBS引脚: 1.25A/用于GND引脚; 其他引脚为0.25A.
 - 1.3. 额定电压: 30V.
 - 1.4. 前电压: 100V_R M.S.
 - 1.5. 绝缘电阻: 至少100兆欧.
2. 机械性能:
 - 3.1. 插入力: 0.51~2.04N
 - 3.2. 拔出力: 0.82~2.04N
 - 3.3. 耐久性: 0.61~2.04K
 - 3.4. 插拔次数: 10000次.
4. 工作环境: -20℃ to +85℃.

5. 材质明细:

胶芯: LCP/黑色; 端子: C7025/镀半金锡10"
中壳片: 不锈钢/素材;
外壳片: 拉伸不锈钢/镀镍;
两侧护套外壳: 不锈钢/镀镍;
环保要求: ROHS+REACH (1.2K/港)