







# ROHS 客户图

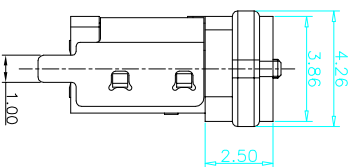

RECOMMEND P.C.B. LAYOUT  
TOLERANCE UNSPECIFIED ±0.05mm

- NOTES:
- SPECIFICATION:
  - CURRENT RATING: 3.0A
  - VOLTAGE RATING: 30V
  - VBUS & GND PINS AND OTHER PINS: 40mD/PIN MAX
  - SHIELD: 50mD/MAX
  - LCR MAX CHANGE OF ALL PINS: 100m
  - INSULATION RESISTANCE: 100MΩ/MIN
  - ELECTRIC WITHSTAND VOLTAGE AC: 100V FOR 1MINUTE
  - INSERTION FORCE: 0.5-2.0Nf
  - PLUNGING FORCE: 0.8-2.0Nf
  - DURABILITY: 10000 CYCLES
  - OPERATING TEMPERATURE: -35°C-+85°C
  - THE PEAK TEMPERATURE ON THE BOARD SHALL BE MAINTAINED FOR 10 SECONDS AT 280°C
  - WATERPROOF: IP-X7.


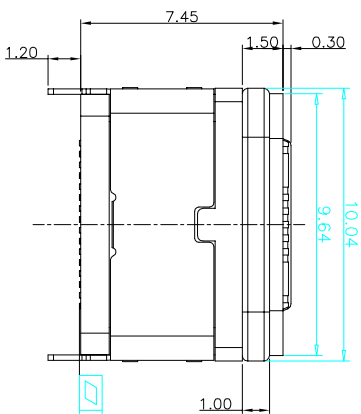


USB TYPE C PIN ASSIGNMENTS

PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SR02
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SB01	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND

TABLE:

NO	PART	QTY	Material
1	PLASTIC SHELL	1	PA UL94 V-0 BLACK
2	CONTACT	16	C7025,TIN80u"/Au5u"/Ni30u"PLATED
3	MID PLATE	1	SUS301,NO PLATING
4	HOUSING	1	LCP UL94 V-0 BLACK
5	SHIELDING PLATE	1	SUS,NI PLATED
6	WATERPROOF RING	1	SILICONE UL94 V-0 BLACK



## 产品图

PRODUCT CHART DWG

深圳市鑫风雷电子有限公司  
Shenzhen xinfenglei Electronics Co., Ltd

公差一览表		单位		比例		日期	
TOLERANCE UNLESS OTHERWISE	OTHERWISE	UNITS	MM	SCALE	1:1	DATE	2009/10/20
X	±0.30	X'	±5'	XX	±2'	XXX	±0.5"
X	±0.25	X'	±2'	XX	±1'	XXX	±0.5"
XXX	±0.15	XXX'	±0.5"	XXX	±0.5"	XXX	±0.5"

制图	审核	核准	产品料号	产品名称	联系方式
DRAWING	CHKD	APPD	PRODUCT NO.	PRODUCT NO.	MAILBOX: sales@xfl.com
王冠	雷永健	雷永健	00101-UCAR036-B		www.xfl.com.com
Leiyoung	Leiyoung	Leiyoung			