
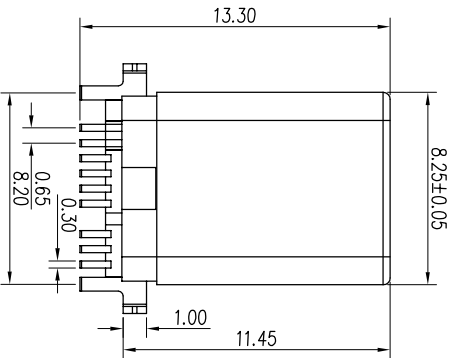




RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

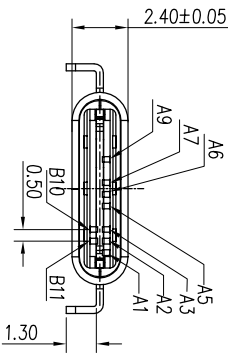

目錄 MAPX	變更內容 MODIFICATION	日期 DATE
A0	NEW	09-10-20

- Specification:
- Electrical Characteristics:
 - Contact Current Rating: 3 Amperes Max.
 - Rated Voltage: 30V Max.
 - Dielectric Withstanding Voltage: AC 100V r.m.s.
 - Insulation Resistance: 100 MΩ Minimum.
 - Contact Resistance: 40 mΩ Maximum.
 - Environmental:
 - Operating Temperature: -30°C~+85°C.
 - Mechanical Characteristics:
 - Insertion Force: 20N MAX.
 - Withdrawal Force: 5~20N.
 - Durability Cycles: 10000 Cycles.

5	EMC SPRING	Stainless Steel; SUS201, T=0.10mm;
4	CONTACT	Copper Alloy; AuNiSn;
3	LATCH	Stainless Steel; SUS301, T=0.3mm;
2	HOUSING	LCP Thermoplastic; UL94V-0;
1	SHELL	Stainless Steel; SUS316, T=0.15mm;
NO.	NAME	DESCRIPTION

A12	A11	A10	A9	A8	A7	A6	A5	A3	A2	A1	
			VBUS	D-	D+	CC		TX-	TX+	GND	
								RX1-	RX1+		
B1	B2	B3	B4	B5	B6	B7	B8	B9	B10	B11	B12

产品图

深圳市鑫风雷电子有限公司

公差一览表 TOLERANCE UNLESS OTHERWISE SPECIFIED		单位 UNITS	MM	制图 DRAWING	王冠	产品料号 PRODUCT PART NO.	23005-UCAM015-X
X	±0.30	X'	±5'	审核 CHECK	雷永健	产品名称 PRODUCT NO.	TYPE C 9P公头拉伸款沉板式
XX	±0.25	X''	±2'	核准 APPROVE	雷永健	角法 VIEW	
XXX	±0.30	XXX'	±1'	日期 DATE	2009/10/20	版本 VER	A0
	±0.15	XXX''	±0.5'				