

RoHS 客户图

目錄 MAPX	設定內容 MODIFICATION	日期 DATE
A0	NEW	09-10-20

Specification:

1.Electrical Characteristics:

Contact Current Rating: 3 Amperes Max.

Rated Voltage: 30V Max.

Dielectric Withstanding Voltage: AC 100V r.m.s.

Insulation Resistance: 100 MΩ Minimum.

Contact Resistance: 40 mΩ Maximum.

2.Environmental:





Operating Temperature: -30°C~+85°C.

3.Mechanical Characteristics:

Insertion Force: 20N MAX.

Withdrawal Force: 5~20N.

Durability Cycles: 10000 Cycles.

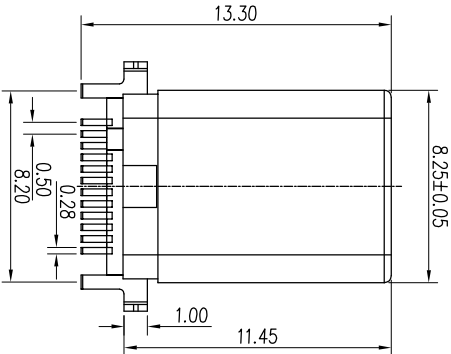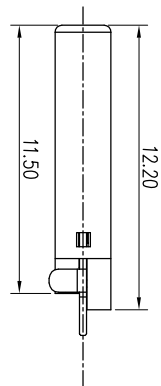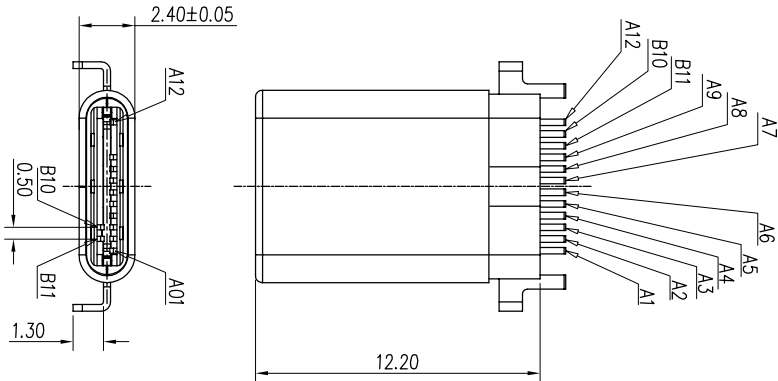

产品图

深圳市鑫风雷电子有限公司

PRODUCT CHART DWG

公差一览表

公差一览表	公差一览表	公差一览表	公差一览表
TOLERANCE UNLESS OTHERWISE	TOLERANCE UNLESS OTHERWISE	TOLERANCE UNLESS OTHERWISE	TOLERANCE UNLESS OTHERWISE
X	±0.30	X'	±5°
.X	±0.25	.X'	±2°
.XX	±0.30	.XX'	±1°
.XXX	±0.15	.XXX'	±0.5°

NO.	NAME	DESCRIPTION
5	EMC SPRING	Stainless Steel;T=0.10mm;
4	CONTACT	Copper Alloy;Au1u"
3	LATCH	Stainless Steel;T=0.3mm;
2	HOUSING	LCP Thermoplastic;UL94V-0;
1	SHELL	Stainless Steel;T=0.15mm;

NO.	NAME	DESCRIPTION
A12	A11	A10
A9	A8	A7
A6	A5	A4
A3	A2	A1
GND		
VBUS	SBU1	D-
D+	CC	VBUS
TX1-	TX1+	GND

NO.	NAME	DESCRIPTION
B1	B2	B3
B4	B5	B6
B7	B8	B9
B10	B11	B12