
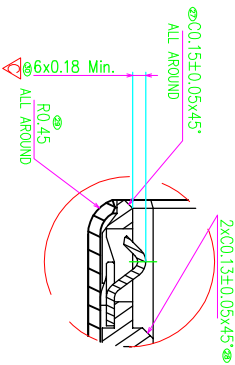
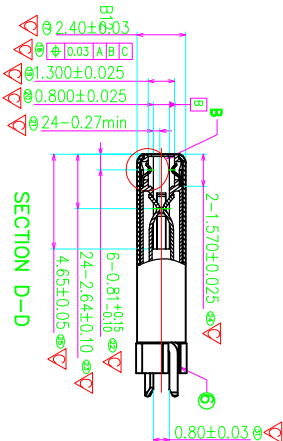
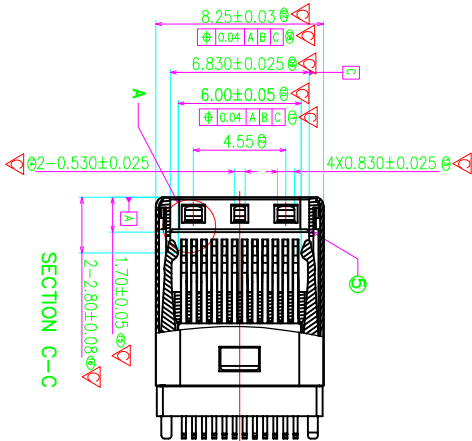




RoHS 客户图



DETAIL B
SCALE 4:1

DETAIL A
SCALE 4:1

- NOTES:
- 1.ELECTRICAL CHARACTERISTICS:
 - 1.1 CURRENT RATING: 3A
 - 1.2 VOLTAGE RATING: AC 100V
 - 1.3 INSULATION RESISTANCE: 100MΩ
 - 1.4 CONTACT RESISTANCE: 40mΩ (MAX)INITIAL FOR VBUS,GND AND ALL OTHER CONTACTS MAXIMUM CHANGE(DELTE) OF +10mΩ AFTER ENVIRONMENTAL STRESSES
 - 1.5 OPERATING TEMPERATURE RANGE: -55℃~+85℃
 - 2.MACHINE CHARACTERISTICS:
 - 2.1 INSERT FORCE: 0.5~2.0 kg/F
 - 2.2 EXTRACT FORCE: 0.8~2.0 kg/F
 - 2.3 DURABILITY: 10000 CYCLES AT A MAX RATE OF 200CYCLES PER HOUR
 - 3.EMPHASIS CONTROL SIZE"V"

6	2PIN MOLDING	1	LCP R845 UL94V-0	COLOR: WHITE
5	HOUSING	1	LCP R845 UL94V-0	COLOR: WHITE
4	EMC SPRING	2	SUS301-H(T=0.10)	✓
3	SHELL	1	SUS 316L(T=0.15)	Ni: 30u"MIN
2	LATCH	1	SUS301-EH(T=0.40)	Ni: 30u"minSn: 120u"Min
1	CONTACT	24	COPPER ALLOY(T=0.15)	Au: 15u" Ni: 60u" Sn: 120u"
ITEM	DESCRIPTION	QTY.	MATERIAL	REMARK

PRODUCT CHART DWG				深圳市鑫风雷电子有限公司			
TOLERANCE UNLESS OTHERWISE		UNITS	MM	DRAWING		PRODUCT PART NO.	201010-01-000000-X
X	±0.30	X	±5°	SCALE	1:1	CHRD	PRODUCT NO.
X	±0.25	X	±2°				
X	±0.30	X	±1°				
.XXX	±0.15	.XXX	±0.5°	DATE	2009/10/20	APPD	VIEW
				VER		A0	