


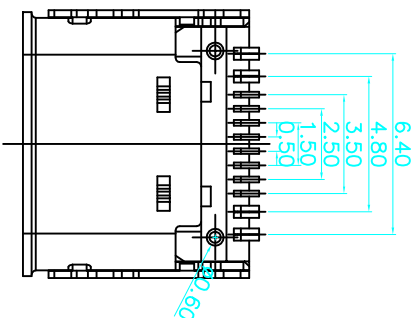
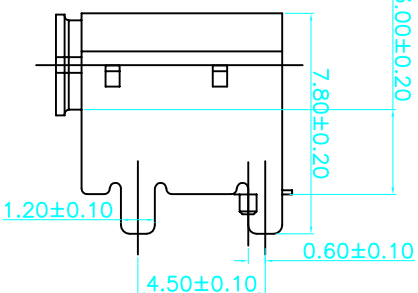




Rohs 客户图

目錄 MAPX	變更內容 MODIFICATION	日期 DATE
A0	NEW	09-10-20



- NOTES:
1. MECHANICAL: MATING FORCE: 5-20N .
UNMATING FORCE: 8-20N .
DURABILITY: 10000 CYCLES MIN.
 2. ELECTRICAL:
CURRENT: 5.0A MAX
VOLTAGE: 20V MAX
WITHSTANDING VOLTAGE: 100V AC
CONTACT RESISTANCE: 40 mΩ MAX INITIAL;
50 mΩ MAX AFTER 10000 CYCLES
 3. ENVIRONMENTAL:
OPERATING TEMPERATURE RANGE: -30° C ~ +80° C
 4. Salt Spray: 24H

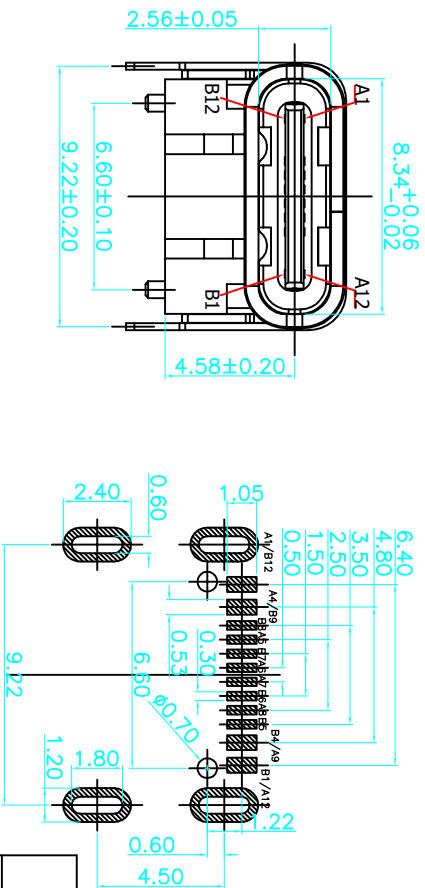

A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12
GND			VBUS	CC1	D+	D-	SBU1	VBUS			GND
GND			VBUS	SBU2	D-	D+	CC2	VBUS			GND
B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1

产品图				深圳市鑫风雷电子有限公司			
PRODUCT CHART DWG				Shenzhen xinfenglei Electronics Co., Ltd			
公差一览表				单位	制图	王冠	产品料号
TOLERANCE UNLESS OTHERWISE				UNITS	DRAWING	Wangguun	01010-UCAF003-X
X	±0.30	X'	±5°	比例	1:1	雷永健	产品名称
X	±0.25	X'	±2°	SCALE		Leiyongjian	PRODUCT NO.
XX	±0.20	XX'	±1°	日期	2009/10/20	雷永健	联系方式
XXX	±0.15	XXX'	±0.5°	DATE		Leiyongjian	Mailbox: sale1@xflecom.com
				核准	Appd	Master/ueh	www.xflecom.com

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO XINFENGLEI ELECTRONIC CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION